

# R&S®FSW

## Signal and Spectrum Analyzer

### Specifications

New order number:  
1331.5003.xx



3 year warranty

# CONTENTS

<b>Definitions .....</b>	<b>3</b>
<b>Specifications.....</b>	<b>4</b>
Frequency .....	4
Sweep time.....	5
Resolution bandwidths.....	6
Level.....	7
Sensitivity .....	9
Spurious responses .....	20
Level measurement uncertainty .....	21
Adjacent channel power dynamic range .....	22
Trigger functions.....	23
Audio demodulator .....	23
I/Q data .....	24
Inputs and outputs .....	30
General data.....	33
<b>Options .....</b>	<b>35</b>
R&S®FSW-B10 external generator control .....	35
R&S®FSW-B13 highpass filters .....	35
R&S®FSW-B17 digital baseband interface .....	35
R&S®FSW-B517 DIG IQ 40G streaming out interface.....	36
R&S®FSW-B21 LO/IF connections for external mixers (not available for R&S®FSW8, R&S®FSW13) .....	36
R&S®FSW-B24 RF preamplifier.....	37
R&S®FSW-B25 electronic attenuator .....	37
R&S®FSW-B71 analog baseband inputs, R&S®FSW-B71E 80 MHz analysis bandwidth for analog baseband inputs .....	38
R&S®FSW-B2000 2 GHz analysis bandwidth (option available for all models except R&S®FSW8, R&S®FSW13) .....	40
R&S®FSW-B5000 5 GHz analysis bandwidth for R&S®FSW43 and R&S®FSW85 .....	42
R&S®FSW-B2071 oscilloscope baseband inputs (available for all R&S®FSW models).....	43
<b>Ordering information .....</b>	<b>44</b>
Options for R&S®FSW with order no. 1331.5003.xx.....	44
<i>Firmware</i> .....	46
<i>PC software</i> .....	48
Upgrades.....	49
Recommended extras.....	50
Power sensors supported .....	52
Probes supported by R&S®FSW-B71/-B71E option .....	53
Oscilloscopes supported by R&S®FSW-B2000/-B2071 option .....	53
Oscilloscopes supported by R&S®FSW-B2000/-B2071 and R&S®FSW-B5000 option .....	53
Service options.....	54

# Definitions


## General

Product data applies under the following conditions:

- Three hours storage at ambient temperature followed by 30 minutes warm-up operation
- Specified environmental conditions met
- Recommended calibration interval adhered to
- All internal automatic adjustments performed, if applicable

## Specifications with limits

Represent warranted product performance by means of a range of values for the specified parameter. These specifications are marked with limiting symbols such as  $<$ ,  $\leq$ ,  $>$ ,  $\geq$ ,  $\pm$ , or descriptions such as maximum, limit of, minimum. Compliance is ensured by testing or is derived from the design. Test limits are narrowed by guard bands to take into account measurement uncertainties, drift and aging, if applicable.

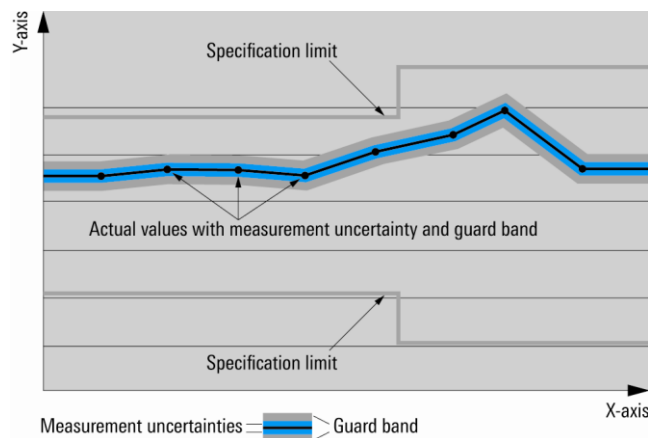

## Specifications without limits

Represent warranted product performance for the specified parameter. These specifications are not specially marked and represent values with no or negligible deviations from the given value (e.g. dimensions or resolution of a setting parameter). Compliance is ensured by design.

## Typical data (typ.)

Characterizes product performance by means of representative information for the given parameter. When marked with  $<$ ,  $>$  or as a range, it represents the performance met by approximately 80 % of the instruments at production time. Otherwise, it represents the mean value.

## Nominal values (nom.)

Characterize product performance by means of a representative value for the given parameter (e.g. nominal impedance). In contrast to typical data, a statistical evaluation does not take place and the parameter is not tested during production.

## Measured values (meas.)

Characterize expected product performance by means of measurement results gained from individual samples.

## Uncertainties

Represent limits of measurement uncertainty for a given measurand. Uncertainty is defined with a coverage factor of 2 and has been calculated in line with the rules of the Guide to the Expression of Uncertainty in Measurement (GUM), taking into account environmental conditions, aging, wear and tear.

Device settings and GUI parameters are indicated as follows: "parameter: value".

Typical data as well as nominal and measured values are not warranted by Rohde & Schwarz.

# Specifications

## Frequency


<b>Frequency range</b>	R&S®FSW8	
	DC coupled	2 Hz to 8 GHz
	AC coupled	10 MHz to 8 GHz
	R&S®FSW13	
	DC coupled	2 Hz to 13.6 GHz
	AC coupled	10 MHz to 13.6 GHz
	R&S®FSW26	
	DC coupled	2 Hz to 26.5 GHz
	AC coupled	10 MHz to 26.5 GHz
	R&S®FSW43	
	DC coupled	2 Hz to 43.5 GHz
	AC coupled	10 MHz to 43.5 GHz
	R&S®FSW50	
	DC coupled	2 Hz to 50 GHz
	AC coupled	10 MHz to 50 GHz
	R&S®FSW67	
	DC coupled	2 Hz to 67 GHz
	AC coupled	10 MHz to 67 GHz
	R&S®FSW85 <sup>1</sup>	
	RF1 input	
	standard	
	DC coupled	2 Hz to 85 GHz
	AC coupled	10 MHz to 85 GHz
with R&S®FSW-B90G option, YIG preselector = off		
DC coupled	2 Hz to 90 GHz	
AC coupled	10 MHz to 90 GHz	
RF2 input		
DC coupled	2 Hz to 67 GHz	
AC coupled	10 MHz to 67 GHz	
<b>Frequency resolution</b>	0.01 Hz	

<b>Reference frequency, internal</b>		
Accuracy		$\pm(\text{time since last adjustment} \times \text{aging rate} + \text{temperature drift} + \text{calibration accuracy})$
Aging per year	standard	$\pm 1 \times 10^{-7}$
	with R&S®FSW-B4 OCXO precision frequency reference option	$\pm 3 \times 10^{-8}$
Temperature drift (0 °C to +50 °C)	standard	$\pm 1 \times 10^{-7}$
	with R&S®FSW-B4 OCXO precision frequency reference option	$\pm 1 \times 10^{-9}$
Achievable initial calibration accuracy	standard	$\pm 1 \times 10^{-8}$
	with R&S®FSW-B4 OCXO precision frequency reference option	$\pm 5 \times 10^{-9}$

<b>Frequency readout</b>		
Marker resolution		1 Hz
Uncertainty		$\pm(\text{marker frequency} \times \text{reference accuracy} + 10 \% \times \text{resolution bandwidth} + \frac{1}{2} (\text{span}/(\text{sweep points} - 1)) + 1 \text{ Hz})$
Number of sweep (trace) points	default value	1001
	range	101 to 100001
Marker tuning frequency step size	marker step size = sweep points	$\text{span}/(\text{sweep points} - 1)$
	marker step size = standard	$\text{span}/(\text{default sweep points} - 1)$
Frequency counter resolution		0.001 Hz
Count accuracy		$\pm(\text{frequency} \times \text{reference accuracy} + \frac{1}{2} (\text{last digit}))$
Display range for frequency axis		0 Hz, 10 Hz to max. frequency
Resolution		0.1 Hz
Max. span deviation		$\pm 0.1 \%$

<sup>1</sup> For R&S®FSW85 all subsequent specifications apply to both RF1 input and RF2 input, unless otherwise stated.

<b>Spectral purity</b>		
SSB phase noise	frequency = 1000 MHz, carrier offset	
	10 Hz, without R&S®FSW-B4 option	-80 dBc (1 Hz), typ. -90 dBc (1 Hz)
	10 Hz, with R&S®FSW-B4 option	-95 dBc (1 Hz), typ. -100 dBc (1 Hz)
	100 Hz	-109 dBc (1 Hz), typ. -116 dBc (1 Hz)
	1 kHz	< -127 dBc (1 Hz), typ. -132 dBc (1 Hz)
	10 kHz	< -136 dBc (1 Hz), typ. -140 dBc (1 Hz)
	100 kHz	< -139 dBc (1 Hz), typ. -143 dBc (1 Hz)
	1 MHz	< -145 dBc (1 Hz), typ. -149 dBc (1 Hz)
	10 MHz	-156 dBc (1 Hz) (nom.)
Residual FM	frequency = 1000 MHz, RBW = 1 kHz, sweep time = 100 ms	< 0.1 Hz (nom.)

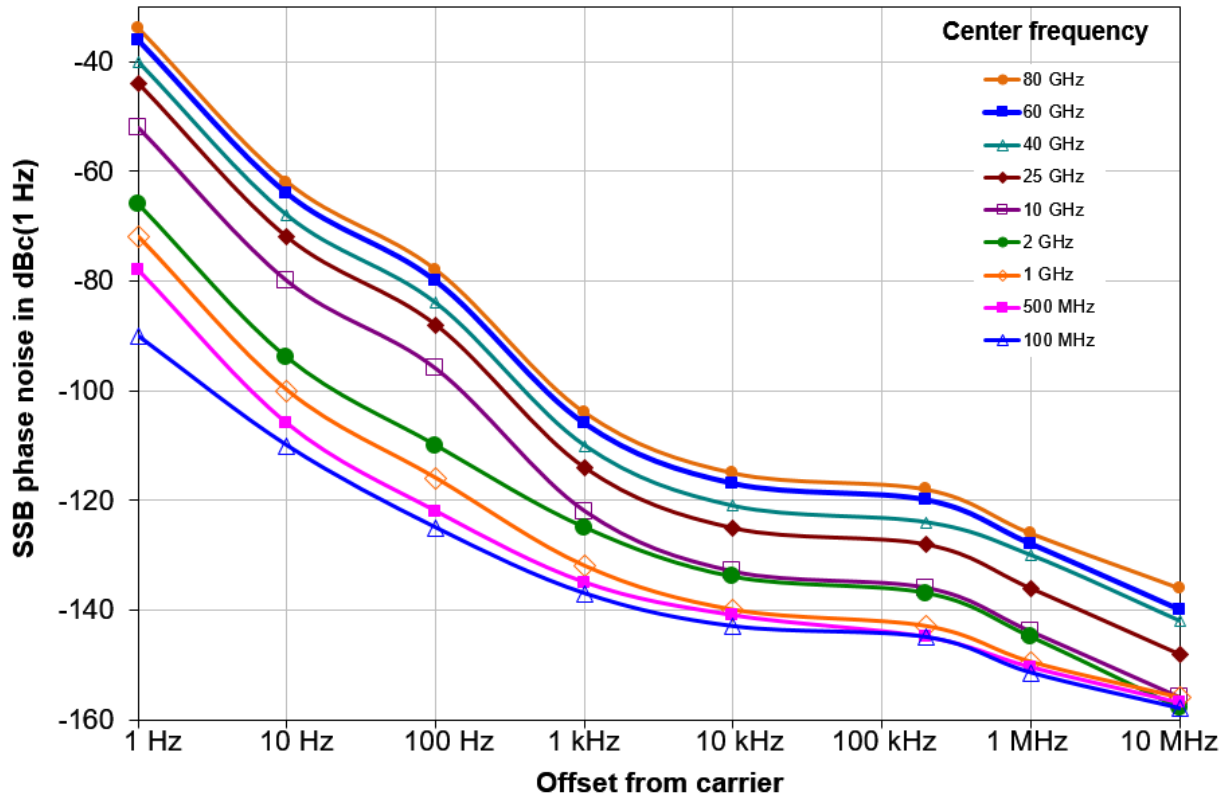

Typical phase noise at different center frequencies (with the R&S®FSW-B4 option for offsets  $\leq 10$  Hz).

## Sweep time

Sweep time range	span = 0 Hz	1 $\mu$ s to 16000 s
	span $\geq 10$ Hz	3 $\mu$ s to 16000 s <sup>2</sup>
Sweep time accuracy	span = 0 Hz	$\pm 0.1$ % (nom.)
	span $\geq 10$ Hz	$\pm 3$ % (nom.)

<sup>2</sup> The selected sweep time is the net data acquisition time (without the extra time needed for hardware settling or FFT processing).

## Resolution bandwidths

<b>Sweep filters and FFT filters</b>		
Resolution bandwidths (–3 dB)		1 Hz to 10 MHz in 1/2/3/5 sequence, 3.9 kHz, 6.25 kHz additionally
	with R&S®FSW-B8E option	20 MHz, 40 MHz additionally
	with R&S®FSW-B8 option	20 MHz, 40 MHz, 50 MHz, 80 MHz additionally
Bandwidth uncertainty		< 3 % (nom.)
Shape factor 60 dB:3 dB		< 5 (nom.)

<b>Channel filters</b>		
Bandwidths (–3 dB)	standard (RRC = root raised cosine)	100 Hz, 200 Hz, 300 Hz, 500 Hz
		1/1.5/2/2.4/2.7/3/3.4/4/4.5/5/6/8.5/9/10/ 12.5/14/15/16/18 (RRC)/20/21/ 24.3 (RRC)/25/30/50/100/150/192/200/ 300/500 kHz
	with R&S®FSW-B8E option	20 MHz, 28 MHz, 40 MHz additionally
	with R&S®FSW-B8 option	20 MHz, 28 MHz, 40 MHz, 80 MHz additionally
Bandwidth accuracy		< 2 % (nom.)
Shape factor 60 dB:3 dB		< 2 (nom.)

<b>EMI filters (with R&amp;S®FSW-K54 only)</b>		
Bandwidths (–6 dB)		10 Hz, 100 Hz, 200 Hz, 1 kHz, 9 kHz, 10 kHz, 100 kHz, 120 kHz, 1 MHz
Bandwidth uncertainty		< 3 % (nom.)
Shape factor 60 dB:3 dB		< 6 (nom.)

<b>Video bandwidths</b>		
	standard	1 Hz to 10 MHz in 1/2/3/5 sequence
	with R&S®FSW-B8 option	20 MHz, 50 MHz, 80 MHz additionally

<b>Max. signal analysis bandwidth</b>		
	equalized	
	standard	10 MHz (nom.) <sup>3</sup>
	with R&S®FSW-B28 option	28 MHz (nom.) <sup>3</sup>
	with R&S®FSW-B40 option	40 MHz (nom.) <sup>3</sup>
	with R&S®FSW-B80 option	80 MHz (nom.) <sup>3</sup>
	with R&S®FSW-B160 option	160 MHz (nom.) <sup>3</sup>
	with R&S®FSW-B320 option	320 MHz (nom.) <sup>3</sup>
	with R&S®FSW-B512/-B512R option	512 MHz (nom.) <sup>3</sup>
	with R&S®FSW-B1200 option	1200 MHz (nom.) <sup>4</sup>
	with R&S®FSW-B2001/-B800R option	2000 MHz (nom.) <sup>4</sup>
with R&S®FSW-B5000 option	5 GHz (nom.) <sup>5</sup>	

<sup>3</sup> YIG preselector off for  $f \geq 8$  GHz.

<sup>4</sup> YIG preselector off for  $f \geq 12$  GHz.

<sup>5</sup> The R&S®FSW-B5000 option can be combined with the base unit or any other analysis bandwidth option. For detailed specifications, see section "R&S®FSW-B5000 5 GHz analysis bandwidth".

## Level

<b>Level display</b>		
Display range		displayed noise floor up to +30 dBm
Logarithmic level axis		1 dB to 200 dB, in steps of 1/2/5
Linear level axis		10 % of reference level per level division, 10 divisions or logarithmic scaling
Number of traces		6
Trace detector		max. peak, min. peak, auto peak (normal), sample, RMS, average
	with R&S®FSW-K54	quasi-peak, RMS average, CISPR average additionally
Trace functions		clear/write, max. hold, min. hold, average, view
Setting range of reference level		-130 dBm to (-10 dBm + RF attenuation - RF preamplifier gain), in steps of 0.01 dB
Units of level axis	logarithmic level display	dBm, dBμV, dBmV, dBμA, dBpW
	linear level display	μV, mV, μA, mA, pW, nW

<b>Max. input level</b>		
DC voltage	AC coupled	
	R&S®FSW8 to R&S®FSW67	50 V
	R&S®FSW85	25 V
	DC coupled	0 V
CW RF power	RF attenuation = 0 dB	20 dBm (= 0.1 W)
	RF attenuation ≥ 10 dB	
	without R&S®FSW-B25 option or with R&S®FSW-B25 option installed and mechanical attenuation ≥ 10 dB	30 dBm (= 1 W)
Pulse spectral density	RF attenuation = 0 dB, RF preamplifier off	97 dB μV/MHz
Max. pulse voltage	without R&S®FSW-B25 option or electronic attenuation off	
	RF attenuation ≥ 10 dB	150 V
	with R&S®FSW-B25 option installed, electronic attenuation on	
	mechanical attenuation = 0 dB	25 V
	mechanical attenuation ≥ 10 dB	75 V
Max. pulse energy, pulse duration $\tau = 10 \mu\text{s}$	without R&S®FSW-B25 option or electronic attenuation off	
	RF attenuation ≥ 10 dB	1 mWs
	with R&S®FSW-B25 option installed, electronic attenuation on	
	mechanical attenuation ≥ 10 dB	1 mWs

<b>Intermodulation</b>		
1 dB compression of input mixer (two-tone)	RF attenuation = 0 dB, RF preamplifier off	
	$f_{in} \leq 3 \text{ GHz}$	+15 dBm (nom.)
	$3 \text{ GHz} < f_{in} \leq 8 \text{ GHz}$	+10 dBm (nom.)
	$f_{in} > 8 \text{ GHz}$	+7 dBm (nom.)
	with R&S®FSW-B24 option, RF attenuation = 0 dB, RF preamplifier on	
	$f_{in} \leq 3 \text{ GHz}$	-13 dBm (nom.)
	$3 \text{ GHz} < f_{in} \leq 8 \text{ GHz}$	-20 dBm (nom.)
	$f_{in} > 8 \text{ GHz}$	-23 dBm (nom.)

Third-order intercept point (TOI)	R&S®FSW8, R&S®FSW13, R&S®FSW26, R&S®FSW43, R&S®FSW50, R&S®FSW67, RF attenuation = 0 dB, level 2 x -15 dBm, $\Delta f > 5 \times \text{RBW}$ , RF preamplifier off	
	$f_{in} < 10 \text{ MHz}$	28 dBm (nom.)
	$10 \text{ MHz} \leq f_{in} < 1 \text{ GHz}$	> 25 dBm, typ. 30 dBm
	$1 \text{ GHz} \leq f_{in} < 3 \text{ GHz}$	> 20 dBm, typ. 25 dBm <sup>6</sup>
	$3 \text{ GHz} \leq f_{in} < 8 \text{ GHz}$	> 17 dBm, typ. 20 dBm
	R&S®FSW85, RF attenuation = 0 dB, level 2 x -15 dBm, $\Delta f > 5 \times \text{RBW}$ , RF preamplifier off	
	$f_{in} < 100 \text{ MHz}$	22 dBm (nom.)
	$100 \text{ MHz} \leq f_{in} < 1 \text{ GHz}$	> 22 dBm, typ. 30 dBm
	$1 \text{ GHz} \leq f_{in} < 3 \text{ GHz}$	> 20 dBm, typ. 25 dBm <sup>6</sup>
	$3 \text{ GHz} \leq f_{in} < 8 \text{ GHz}$	> 17 dBm, typ. 20 dBm
	R&S®FSW13, R&S®FSW26, RF attenuation = 0 dB, level 2 x -15 dBm, $\Delta f > 5 \times \text{RBW}$ , YIG preselector on, RF preamplifier off	
	$8 \text{ GHz} \leq f_{in} < 10 \text{ GHz}$	> 14 dBm, typ. 17 dBm
	$10 \text{ GHz} \leq f_{in} < 12 \text{ GHz}$	> 16 dBm, typ. 20 dBm
	$12 \text{ GHz} \leq f_{in} < 17 \text{ GHz}$	> 18 dBm, typ. 23 dBm
	$17 \text{ GHz} \leq f_{in} < 19 \text{ GHz}$	> 16 dBm, typ. 20 dBm
	$19 \text{ GHz} \leq f_{in} \leq 26.5 \text{ GHz}$	> 18 dBm, typ. 23 dBm
	R&S®FSW43, R&S®FSW50, R&S®FSW67, R&S®FSW85, RF attenuation = 0 dB, level 2 x -20 dBm, $\Delta f > 5 \times \text{RBW}$ , YIG preselector on, RF preamplifier off	
	$8 \text{ GHz} \leq f_{in} \leq 13.6 \text{ GHz}$	> 8 dBm, typ. 11 dBm
	$13.6 \text{ GHz} \leq f_{in} \leq 40 \text{ GHz}$	> 10 dBm, typ. 15 dBm
	$f_{in} > 40 \text{ GHz}$	12 dBm (nom.)
	R&S®FSW8, R&S®FSW13, R&S®FSW26 with R&S®FSW-B24 option, RF attenuation = 0 dB, level 2 x -50 dBm, $\Delta f > 5 \times \text{RBW}$ , YIG preselector on, RF preamplifier on	
	$10 \text{ MHz} \leq f_{in} < 1 \text{ GHz}$	-10 dBm (nom.)
	$1 \text{ GHz} \leq f_{in} < 8 \text{ GHz}$	-13 dBm (nom.)
	$8 \text{ GHz} \leq f_{in} \leq 26.5 \text{ GHz}$	-15 dBm (nom.)
	R&S®FSW43, R&S®FSW50, R&S®FSW67 with R&S®FSW-B24 option, RF attenuation = 0 dB, level 2 x -55 dBm, $\Delta f > 5 \times \text{RBW}$ , YIG preselector on, RF preamplifier on	
	$10 \text{ MHz} \leq f_{in} < 1 \text{ GHz}$	-5 dBm (nom.)
	$1 \text{ GHz} \leq f_{in} < 4 \text{ GHz}$	-10 dBm (nom.)
$f_{in} > 4 \text{ GHz}$	-20 dBm (nom.)	
Second-harmonic intercept point (SHI)	R&S®FSW8, R&S®FSW13, R&S®FSW26, RF attenuation = 0 dB, level = -5 dBm, YIG preselector on, RF preamplifier off	
	$1 \text{ MHz} < f_{in} \leq 350 \text{ MHz}$	> 50 dBm, typ. 62 dBm
	$350 \text{ MHz} < f_{in} \leq 500 \text{ MHz}$	> 70 dBm, typ. 80 dBm
	$500 \text{ MHz} < f_{in} < 1.5 \text{ GHz}$ <sup>7</sup>	> 47 dBm, typ. 52 dBm
	$500 \text{ MHz} < f_{in} < 1.5 \text{ GHz}$ <sup>8</sup>	> 62 dBm, typ. 70 dBm
	$1.5 \text{ GHz} \leq f_{in} \leq 4 \text{ GHz}$	> 62 dBm, typ. 70 dBm
	$4 \text{ GHz} < f_{in} \leq 13.5 \text{ GHz}$	65 dBm (nom.)
	R&S®FSW43, R&S®FSW50, R&S®FSW67, R&S®FSW85, RF attenuation = 0 dB, level = -5 dBm, YIG preselector on, RF preamplifier off	
	$1 \text{ MHz} < f_{in} \leq 500 \text{ MHz}$	> 45 dBm, typ. 55 dBm <sup>9</sup>
	$500 \text{ MHz} < f_{in} < 1.5 \text{ GHz}$ <sup>7</sup>	> 47 dBm, typ. 56 dBm
	$500 \text{ MHz} < f_{in} < 1.5 \text{ GHz}$ <sup>8</sup>	> 52 dBm, typ. 60 dBm
	$1.5 \text{ GHz} \leq f_{in} \leq 4 \text{ GHz}$	> 62 dBm, typ. 70 dBm
	$4 \text{ GHz} < f_{in} \leq 42.5 \text{ GHz}$	65 dBm (nom.)
	R&S®FSW8, R&S®FSW13, R&S®FSW26, R&S®FSW43, R&S®FSW50, R&S®FSW67, with R&S®FSW-B24 option, RF attenuation = 0 dB, level = -50 dBm, YIG preselector on, RF preamplifier on	
	$50 \text{ MHz} < f_{in} \leq 21.75 \text{ GHz}$	10 dBm (nom.)

<sup>6</sup> With R&S®FSW-B13 highpass filter option, highpass off. With highpass on, the TOI degrades by 5 dB (nom.).

<sup>7</sup> Without R&S®FSW-B13 highpass filter option or highpass off.

<sup>8</sup> With R&S®FSW-B13 highpass filter option, highpass on.

<sup>9</sup> For  $1 \text{ MHz} < f_{in} \leq 100 \text{ MHz}$  the following limit applies for R&S®FSW85: > 42 dBm, typ. 47 dBm



## Sensitivity

All noise level data in this section not marked as typical (typ.) or nominal (nom.) are specified values whose compliance is ensured by testing.

<b>Displayed average noise level of the R&amp;S®FSW8</b>		
RF preamplifier off	RF attenuation = 0 dB, termination = 50 Ω, normalized to 1 Hz RBW, trace average, average mode = log, sample detector, +5 °C to +40 °C	
	2 Hz ≤ f ≤ 100 Hz	-110 dBm, typ. -120 dBm
	100 Hz < f ≤ 1 kHz	-120 dBm, typ. -130 dBm
	1 kHz < f < 9 kHz	-135 dBm, typ. -147 dBm
	RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, without R&S®FSW-B25 electronic attenuator option	
	9 kHz ≤ f ≤ 1 MHz	-145 dBm, typ. -150 dBm
	1 MHz < f ≤ 1 GHz	-150 dBm, typ. -154 dBm
	1 GHz < f < 3 GHz <sup>7</sup>	-152 dBm, typ. -156 dBm
	1 GHz < f < 3 GHz <sup>8</sup>	-155 dBm, typ. -160 dBm
	3 GHz ≤ f ≤ 8 GHz	-152 dBm, typ. -156 dBm
add 1 dB to the above values if the R&S®FSW-B25 option is installed		
RF preamplifier = 30 dB	RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, with R&S®FSW-B24 option, without R&S®FSW-B25 electronic attenuator option	
	10 MHz < f ≤ 50 MHz	-154 dBm (nom.)
	50 MHz < f ≤ 150 MHz	-163 dBm, typ. -166 dBm
	150 MHz < f ≤ 8 GHz	-166 dBm, typ. -169 dBm
	add 1 dB to the above values if the R&S®FSW-B25 option is installed	
Improvement with noise cancellation	for noise-like signals	13 dB (nom.)

<b>Displayed average noise level of the R&amp;S®FSW13, R&amp;S®FSW26, without R&amp;S®FSW-B24 option</b>			
	RF attenuation = 0 dB, termination = 50 Ω, normalized to 1 Hz RBW, trace average, average mode = log, sample detector, +5 °C to +40 °C		
	2 Hz ≤ f ≤ 100 Hz	-110 dBm, typ. -120 dBm	
	100 Hz < f ≤ 1 kHz	-120 dBm, typ. -130 dBm	
	1 kHz < f < 9 kHz	-135 dBm, typ. -147 dBm	
	RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, f ≥ 8 GHz: YIG preselector on, without R&S®FSW-B25 electronic attenuator option		
	9 kHz ≤ f ≤ 1 MHz	-145 dBm, typ. -150 dBm	
	1 MHz < f ≤ 1 GHz	-149 dBm, typ. -154 dBm	
	1 GHz < f < 3 GHz <sup>7</sup>	-151 dBm, typ. -156 dBm	
	1 GHz < f < 3 GHz <sup>8</sup>	-154 dBm, typ. -159 dBm	
	3 GHz ≤ f < 8 GHz	-151 dBm, typ. -156 dBm	
	8 GHz ≤ f < 13.6 GHz	-150 dBm, typ. -155 dBm	
	13.6 GHz ≤ f < 18 GHz	-149 dBm, typ. -153 dBm	
	18 GHz ≤ f < 25 GHz	-147 dBm, typ. -150 dBm	
	25 GHz ≤ f < 26.5 GHz	-143 dBm, typ. -146 dBm	
	add 1 dB to the above values for frequencies < 8 GHz, 2 dB for frequencies ≥ 8 GHz, if R&S®FSW-B25 option is installed		
	RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, YIG preselector off, without R&S®FSW-B25 electronic attenuator option		
	8 GHz ≤ f < 13.6 GHz	-150 dBm, typ. -155 dBm	
	13.6 GHz ≤ f < 25 GHz	-149 dBm, typ. -153 dBm	
	25 GHz ≤ f < 26.5 GHz	-147 dBm, typ. -150 dBm	
	add 2 dB to the above values if the R&S®FSW-B25 option is installed		
Improvement with noise cancellation	for noise-like signals	13 dB (nom.)	

Displayed average noise level of the R&S®FSW13, R&S®FSW26, with R&S®FSW-B24 option			
RF preamplifier off	RF attenuation = 0 dB, termination = 50 Ω, normalized to 1 Hz RBW, trace average, average mode = log, sample detector, +5 °C to +40 °C		
	2 Hz ≤ f ≤ 100 Hz	-110 dBm, typ. -120 dBm	
	100 Hz < f ≤ 1 kHz	-120 dBm, typ. -130 dBm	
	1 kHz < f < 9 kHz	-135 dBm, typ. -147 dBm	
	RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, f ≥ 8 GHz: YIG preselector on, without R&S®FSW-B25 electronic attenuator option		
	9 kHz ≤ f ≤ 1 MHz	-145 dBm, typ. -150 dBm	
	1 MHz < f ≤ 1 GHz	-149 dBm, typ. -154 dBm	
	1 GHz < f < 3 GHz <sup>7</sup>	-151 dBm, typ. -156 dBm	
	1 GHz < f < 3 GHz <sup>8</sup>	-154 dBm, typ. -159 dBm	
	3 GHz ≤ f < 8 GHz	-151 dBm, typ. -156 dBm	
	8 GHz ≤ f < 13.6 GHz	-149 dBm, typ. -154 dBm	
	13.6 GHz ≤ f < 18 GHz	-148 dBm, typ. -152 dBm	
	18 GHz ≤ f < 25 GHz	-145 dBm, typ. -149 dBm	
	25 GHz ≤ f < 26.5 GHz	-141 dBm, typ. -145 dBm	
	add 1 dB to the above values for frequencies < 8 GHz, 2 dB for frequencies ≥ 8 GHz, if R&S®FSW-B25 option is installed		
RF preamplifier = 30 dB	RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, YIG preselector off, without R&S®FSW-B25 electronic attenuator option		
	8 GHz ≤ f < 13.6 GHz	-149 dBm, typ. -154 dBm	
	13.6 GHz ≤ f < 25 GHz	-148 dBm, typ. -152 dBm	
	25 GHz ≤ f < 26.5 GHz	-145 dBm, typ. -149 dBm	
	add 2 dB to the above values if the R&S®FSW-B25 option is installed		
	RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, YIG preselector on, without R&S®FSW-B25 electronic attenuator option		
	10 MHz < f ≤ 50 MHz	-154 dBm (nom.)	
	50 MHz < f ≤ 150 MHz	-163 dBm, typ. -166 dBm	
	150 MHz < f ≤ 8 GHz	-166 dBm, typ. -169 dBm	
	8 GHz < f ≤ 13.6 GHz	-164 dBm, typ. -168 dBm	
	13.6 GHz < f ≤ 22 GHz	-162 dBm, typ. -166 dBm	
	22 GHz < f ≤ 26.5 GHz	-157 dBm, typ. -161 dBm	
	add 1 dB to the above values for frequencies < 8 GHz, 2 dB for frequencies ≥ 8 GHz, if R&S®FSW-B25 option is installed		
	Improvement with noise cancellation	for noise-like signals	13 dB (nom.)

Displayed average noise level of the R&S®FSW43 without R&S®FSW-B24 option		
	RF attenuation = 0 dB, termination = 50 Ω, normalized to 1 Hz RBW, trace average, average mode = log, sample detector, +5 °C to +40 °C	
	2 Hz ≤ f ≤ 100 Hz	-110 dBm, typ. -120 dBm
	100 Hz < f ≤ 1 kHz	-120 dBm, typ. -130 dBm
	1 kHz < f < 9 kHz	-135 dBm, typ. -147 dBm
	RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, f ≥ 8 GHz: YIG preselector on	
	9 kHz ≤ f ≤ 1 MHz	-145 dBm, typ. -150 dBm
	1 MHz < f ≤ 1 GHz	-149 dBm, typ. -154 dBm
	1 GHz < f < 3 GHz <sup>7</sup>	-151 dBm, typ. -156 dBm
	1 GHz < f < 3 GHz <sup>8</sup>	-154 dBm, typ. -159 dBm
	3 GHz ≤ f < 8 GHz	-151 dBm, typ. -156 dBm
	8 GHz ≤ f < 13.6 GHz	-150 dBm, typ. -154 dBm
	13.6 GHz ≤ f < 18 GHz	-149 dBm, typ. -153 dBm
	18 GHz ≤ f < 25 GHz	-147 dBm, typ. -151 dBm
	25 GHz ≤ f ≤ 34 GHz	-143 dBm, typ. -147 dBm
	34 GHz < f ≤ 40 GHz	-140 dBm, typ. -144 dBm
	40 GHz < f ≤ 43.5 GHz	-138 dBm, typ. -142 dBm
	add 1 dB to the above values for frequencies < 8 GHz, if the R&S®FSW-B1200/-B2001/-B800R option is installed	
	RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, YIG preselector off	
	8 GHz ≤ f < 13.6 GHz	-152 dBm, typ. -157 dBm
	13.6 GHz ≤ f < 18 GHz	-151 dBm, typ. -156 dBm
	18 GHz ≤ f < 25 GHz	-149 dBm, typ. -154 dBm
	25 GHz ≤ f ≤ 34 GHz	-147 dBm, typ. -151 dBm
	34 GHz < f ≤ 40 GHz	-144 dBm, typ. -148 dBm
	40 GHz < f ≤ 43.5 GHz	-142 dBm, typ. -146 dBm
Improvement with noise cancellation	for noise-like signals	13 dB (nom.)

Displayed average noise level of the R&S®FSW43 with R&S®FSW-B24 option		
RF preamplifier off	RF attenuation = 0 dB, termination = 50 Ω, normalized to 1 Hz RBW, trace average, average mode = log, sample detector, +5 °C to +40 °C	
	2 Hz ≤ f ≤ 100 Hz	-110 dBm, typ. -120 dBm
	100 Hz < f ≤ 1 kHz	-120 dBm, typ. -130 dBm
	1 kHz < f < 9 kHz	-135 dBm, typ. -147 dBm
	RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, f ≥ 8 GHz: YIG preselector on	
	9 kHz ≤ f ≤ 1 MHz	-145 dBm, typ. -150 dBm
	1 MHz < f ≤ 1 GHz	-149 dBm, typ. -154 dBm
	1 GHz < f < 3 GHz <sup>7</sup>	-150 dBm, typ. -155 dBm
	1 GHz < f < 3 GHz <sup>8</sup>	-153 dBm, typ. -158 dBm
	3 GHz ≤ f < 8 GHz	-150 dBm, typ. -155 dBm
	8 GHz ≤ f < 13.6 GHz	-148 dBm, typ. -152 dBm
	13.6 GHz ≤ f < 18 GHz	-147 dBm, typ. -151 dBm
	18 GHz ≤ f < 25 GHz	-145 dBm, typ. -149 dBm
	25 GHz ≤ f ≤ 34 GHz	-140 dBm, typ. -144 dBm
	34 GHz < f ≤ 40 GHz	-137 dBm, typ. -141 dBm
	40 GHz < f ≤ 43.5 GHz	-135 dBm, typ. -140 dBm
	add 1 dB to the above values for frequencies < 8 GHz, if the R&S®FSW-B1200/-B2001/-B800R option is installed	
	RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, YIG preselector off	
	8 GHz ≤ f < 13.6 GHz	-150 dBm, typ. -155 dBm
	13.6 GHz ≤ f < 18 GHz	-149 dBm, typ. -154 dBm
18 GHz ≤ f < 25 GHz	-147 dBm, typ. -152 dBm	
25 GHz ≤ f ≤ 34 GHz	-144 dBm, typ. -149 dBm	
34 GHz < f ≤ 40 GHz	-141 dBm, typ. -145 dBm	
40 GHz < f ≤ 43.5 GHz	-139 dBm, typ. -144 dBm	
RF preamplifier = 30 dB	RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, YIG preselector on	
	100 kHz < f ≤ 1 MHz	-160 dBm, typ. -163 dBm
	1 MHz < f ≤ 3 GHz	-165 dBm, typ. -169 dBm
	3 GHz < f ≤ 8 GHz	-162 dBm, typ. -166 dBm
	8 GHz < f ≤ 18 GHz	-162 dBm, typ. -167 dBm
	18 GHz < f ≤ 26.5 GHz	-161 dBm, typ. -166 dBm
	26.5 GHz < f ≤ 40 GHz	-160 dBm, typ. -164 dBm
	40 GHz < f ≤ 43.5 GHz	-157 dBm, typ. -162 dBm
	add 1 dB to the above values for frequencies < 8 GHz, if the R&S®FSW-B1200/-B2001/-B800R option is installed	
	Improvement with noise cancellation	for noise-like signals

Displayed average noise level of the R&S®FSW50 without R&S®FSW-B24 option		
	RF attenuation = 0 dB, termination = 50 Ω, normalized to 1 Hz RBW, trace average, average mode = log, sample detector, +5 °C to +40 °C	
	2 Hz ≤ f ≤ 100 Hz	-110 dBm, typ. -120 dBm
	100 Hz < f ≤ 1 kHz	-120 dBm, typ. -130 dBm
	1 kHz < f < 9 kHz	-135 dBm, typ. -147 dBm
	RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, f ≥ 8 GHz: YIG preselector on	
	9 kHz ≤ f ≤ 1 MHz	-145 dBm, typ. -150 dBm
	1 MHz < f ≤ 1 GHz	-149 dBm, typ. -154 dBm
	1 GHz < f < 3 GHz <sup>7</sup>	-151 dBm, typ. -156 dBm
	1 GHz < f < 3 GHz <sup>8</sup>	-154 dBm, typ. -159 dBm
	3 GHz ≤ f < 8 GHz	-151 dBm, typ. -156 dBm
	8 GHz ≤ f < 13.6 GHz	-150 dBm, typ. -154 dBm
	13.6 GHz ≤ f < 18 GHz	-149 dBm, typ. -153 dBm
	18 GHz ≤ f < 25 GHz	-147 dBm, typ. -151 dBm
	25 GHz ≤ f ≤ 34 GHz	-143 dBm, typ. -147 dBm
	34 GHz < f ≤ 40 GHz	-140 dBm, typ. -144 dBm
	40 GHz < f ≤ 43.5 GHz	-138 dBm, typ. -142 dBm
	43.5 GHz < f ≤ 47 GHz	-136 dBm, typ. -140 dBm
	47 GHz < f ≤ 49 GHz	-134 dBm, typ. -138 dBm
	49 GHz < f ≤ 50 GHz	-132 dBm, typ. -136 dBm
	add 1 dB to the above values for frequencies < 8 GHz, if the R&S®FSW-B1200/-B2001/-B800R option is installed	
	RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, YIG preselector off	
	8 GHz ≤ f < 13.6 GHz	-152 dBm, typ. -157 dBm
	13.6 GHz ≤ f < 18 GHz	-151 dBm, typ. -156 dBm
	18 GHz ≤ f < 25 GHz	-149 dBm, typ. -154 dBm
	25 GHz ≤ f ≤ 34 GHz	-147 dBm, typ. -151 dBm
	34 GHz < f ≤ 40 GHz	-144 dBm, typ. -148 dBm
	40 GHz < f ≤ 43.5 GHz	-142 dBm, typ. -146 dBm
	43.5 GHz < f ≤ 47 GHz	-140 dBm, typ. -144 dBm
	47 GHz < f ≤ 49 GHz	-138 dBm, typ. -142 dBm
	49 GHz < f ≤ 50 GHz	-136 dBm, typ. -140 dBm
Improvement with noise cancellation	for noise-like signals	13 dB (nom.)

Displayed average noise level of the R&S®FSW50 with R&S®FSW-B24 option		
RF preamplifier off	RF attenuation = 0 dB, termination = 50 Ω, normalized to 1 Hz RBW, trace average, average mode = log, sample detector, +5 °C to +40 °C	
	2 Hz ≤ f ≤ 100 Hz	-110 dBm
	100 Hz < f ≤ 1 kHz	-120 dBm
	1 kHz < f < 9 kHz	-135 dBm
	RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, f ≥ 8 GHz: YIG preselector on	
	9 kHz ≤ f ≤ 1 MHz	-145 dBm
	1 MHz < f ≤ 1 GHz	-149 dBm
	1 GHz < f < 3 GHz <sup>7</sup>	-150 dBm
	1 GHz < f < 3 GHz <sup>8</sup>	-153 dBm
	3 GHz ≤ f < 8 GHz	-150 dBm
	8 GHz ≤ f < 13.6 GHz	-148 dBm
	13.6 GHz ≤ f < 18 GHz	-147 dBm
	18 GHz ≤ f < 25 GHz	-145 dBm
	25 GHz ≤ f ≤ 34 GHz	-140 dBm
	34 GHz < f ≤ 40 GHz	-137 dBm
	40 GHz < f ≤ 43.5 GHz	-135 dBm
	43.5 GHz < f ≤ 47 GHz	-133 dBm
	47 GHz < f ≤ 49 GHz	-131 dBm
	49 GHz < f ≤ 50 GHz	-129 dBm
	add 1 dB to the above values for frequencies < 8 GHz, if the R&S®FSW-B1200/-B2001/-B800R option is installed	
	RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, YIG preselector off	
	8 GHz ≤ f < 13.6 GHz	-150 dBm
	13.6 GHz ≤ f < 18 GHz	-149 dBm
	18 GHz ≤ f < 25 GHz	-147 dBm
	25 GHz ≤ f ≤ 34 GHz	-144 dBm
34 GHz < f ≤ 40 GHz	-141 dBm	
40 GHz < f ≤ 43.5 GHz	-139 dBm	
43.5 GHz < f ≤ 47 GHz	-137 dBm	
47 GHz < f ≤ 49 GHz	-135 dBm	
49 GHz < f ≤ 50 GHz	-133 dBm	
RF preamplifier = 30 dB	RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, YIG preselector on	
	100 kHz < f ≤ 1 MHz	-160 dBm
	1 MHz < f ≤ 3 GHz	-165 dBm
	3 GHz < f ≤ 8 GHz	-162 dBm
	8 GHz < f ≤ 18 GHz	-162 dBm
	18 GHz < f ≤ 26.5 GHz	-161 dBm
	26.5 GHz < f ≤ 40 GHz	-160 dBm
	R&S®FSW-B24 option, model .49	
	40 GHz < f ≤ 43 GHz	-157 dBm
	43 GHz < f ≤ 50 GHz	-149 dBm
	R&S®FSW-B24 option, model .51	
	40 GHz < f ≤ 43.5 GHz	-157 dBm
	43.5 GHz < f ≤ 47 GHz	-155 dBm
	47 GHz < f ≤ 50 GHz	-153 dBm
	add 1 dB to the above values for frequencies < 8 GHz, if the R&S®FSW-B1200/-B2001/-B800R option is installed	
	Improvement with noise cancellation	for noise-like signals
		R&S®FSW-B24 option, model .49
100 kHz < f ≤ 43 GHz		13 dB (nom.)
43 GHz < f ≤ 50 GHz		0 dB (nom.)
R&S®FSW-B24 option, model .51		
100 kHz < f ≤ 50 GHz	13 dB (nom.)	


Displayed average noise level of the R&S®FSW67 without R&S®FSW-B24 option		
	RF attenuation = 0 dB, termination = 50 Ω, normalized to 1 Hz RBW, trace average, average mode = log, sample detector, +5 °C to +40 °C	
	2 Hz ≤ f ≤ 100 Hz	-110 dBm, typ. -120 dBm
	100 Hz < f ≤ 1 kHz	-120 dBm, typ. -130 dBm
	1 kHz < f < 9 kHz	-135 dBm, typ. -147 dBm
	RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, f ≥ 8 GHz: YIG preselector on	
	9 kHz ≤ f ≤ 1 MHz	-145 dBm, typ. -150 dBm
	1 MHz < f ≤ 1 GHz	-149 dBm, typ. -154 dBm
	1 GHz < f < 3 GHz <sup>7</sup>	-151 dBm, typ. -156 dBm
	1 GHz < f < 3 GHz <sup>8</sup>	-154 dBm, typ. -159 dBm
	3 GHz ≤ f < 8 GHz	-151 dBm, typ. -156 dBm
	8 GHz ≤ f < 13.6 GHz	-146 dBm, typ. -150 dBm
	13.6 GHz ≤ f < 18 GHz	-144 dBm, typ. -148 dBm
	18 GHz ≤ f < 23 GHz	-141 dBm, typ. -145 dBm
	23 GHz ≤ f < 30 GHz	-137 dBm, typ. -141 dBm
	30 GHz ≤ f ≤ 34 GHz	-135 dBm, typ. -139 dBm
	34 GHz < f ≤ 43.5 GHz	-131 dBm, typ. -135 dBm
	43.5 GHz < f ≤ 47 GHz	-127 dBm, typ. -131 dBm
	47 GHz < f ≤ 49 GHz	-124 dBm, typ. -128 dBm
	49 GHz < f ≤ 50 GHz	-122 dBm, typ. -126 dBm
	50 GHz < f ≤ 55 GHz	-141 dBm, typ. -143 dBm
	55 GHz < f ≤ 62 GHz	-137 dBm, typ. -139 dBm
	62 GHz < f ≤ 67 GHz	-133 dBm, typ. -135 dBm
	add 1 dB to the above values for frequencies < 8 GHz, if the R&S®FSW-B1200/-B2001/-B800R option is installed	
	RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, YIG preselector off	
	8 GHz ≤ f < 13.6 GHz	-148 dBm, typ. -152 dBm
	13.6 GHz ≤ f < 18 GHz	-146 dBm, typ. -150 dBm
	18 GHz ≤ f < 23 GHz	-143 dBm, typ. -147 dBm
	23 GHz ≤ f < 30 GHz	-139 dBm, typ. -142 dBm
	30 GHz ≤ f ≤ 34 GHz	-137 dBm, typ. -140 dBm
	34 GHz < f ≤ 43.5 GHz	-133 dBm, typ. -136 dBm
	43.5 GHz < f ≤ 47 GHz	-129 dBm, typ. -132 dBm
	47 GHz < f ≤ 49 GHz	-126 dBm, typ. -129 dBm
	49 GHz < f ≤ 50 GHz	-125 dBm, typ. -128 dBm
	50 GHz < f ≤ 55 GHz	-141 dBm, typ. -142 dBm
	55 GHz < f ≤ 62 GHz	-137 dBm, typ. -139 dBm
	62 GHz < f ≤ 67 GHz	-133 dBm, typ. -135 dBm
Improvement with noise cancellation	for noise-like signals	
	2 Hz < f ≤ 43 GHz	13 dB (nom.)
	43 GHz < f ≤ 67 GHz	8 dB (nom.)

<b>Displayed average noise level of the R&amp;S®FSW67 with R&amp;S®FSW-B24 option</b>	
RF preamplifier off	RF attenuation = 0 dB, termination = 50 Ω, normalized to 1 Hz RBW, trace average, average mode = log, sample detector, +5 °C to +40 °C
	2 Hz ≤ f ≤ 100 Hz -110 dBm
	100 Hz < f ≤ 1 kHz -120 dBm
	1 kHz < f < 9 kHz -135 dBm
	RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, f ≥ 8 GHz: YIG preselector on
	9 kHz ≤ f ≤ 1 MHz -145 dBm
	1 MHz < f ≤ 1 GHz -149 dBm
	1 GHz < f < 3 GHz <sup>7</sup> -150 dBm
	1 GHz < f < 3 GHz <sup>8</sup> -153 dBm
	3 GHz ≤ f < 8 GHz -150 dBm
	8 GHz ≤ f < 13.6 GHz -144 dBm
	13.6 GHz ≤ f < 18 GHz -142 dBm
	18 GHz ≤ f < 23 GHz -139 dBm
	23 GHz ≤ f < 30 GHz -135 dBm
	30 GHz ≤ f ≤ 34 GHz -132 dBm
	34 GHz < f ≤ 43.5 GHz -128 dBm
	43.5 GHz < f ≤ 47 GHz -124 dBm
	47 GHz < f ≤ 49 GHz -121 dBm
	49 GHz < f ≤ 50 GHz -119 dBm
	50 GHz < f ≤ 55 GHz -138 dBm
	55 GHz < f ≤ 62 GHz -134 dBm
	62 GHz < f ≤ 67 GHz -130 dBm
	add 1 dB to the above values for frequencies < 8 GHz, if the R&S®FSW-B1200/-B2001/-B800R option is installed
	RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, YIG preselector off
	8 GHz ≤ f < 13.6 GHz -146 dBm
	13.6 GHz ≤ f < 18 GHz -144 dBm
	18 GHz ≤ f < 23 GHz -141 dBm
	23 GHz ≤ f < 30 GHz -137 dBm
	30 GHz ≤ f ≤ 34 GHz -134 dBm
	34 GHz < f ≤ 43.5 GHz -130 dBm
	43.5 GHz < f ≤ 47 GHz -126 dBm
	47 GHz < f ≤ 49 GHz -123 dBm
	49 GHz < f ≤ 50 GHz -122 dBm
50 GHz < f ≤ 55 GHz -138 dBm	
55 GHz < f ≤ 62 GHz -134 dBm	
62 GHz < f ≤ 67 GHz -130 dBm	




RF preamplifier = 30 dB	RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, YIG preselector on		
	100 kHz < f ≤ 1 MHz	-160 dBm	
	1 MHz < f ≤ 3 GHz	-165 dBm	
	3 GHz < f ≤ 8 GHz	-162 dBm	
	8 GHz < f ≤ 18 GHz	-161 dBm	
	18 GHz < f ≤ 26.5 GHz	-160 dBm	
	26.5 GHz < f ≤ 35 GHz	-159 dBm	
	35 GHz < f ≤ 42 GHz	-157 dBm	
	R&S®FSW-B24 option, model .66		
	42 GHz < f ≤ 43 GHz	-150 dBm	
	43 GHz < f ≤ 47 GHz	-146 dBm	
	47 GHz < f ≤ 50 GHz	-144 dBm	
	50 GHz < f ≤ 54 GHz	-148 dBm	
	54 GHz < f ≤ 56 GHz	-146 dBm	
	56 GHz < f ≤ 62 GHz	-144 dBm	
	62 GHz < f ≤ 65 GHz	-142 dBm	
	65 GHz < f ≤ 67 GHz	-140 dBm	
	R&S®FSW-B24 option, model .67		
	42 GHz < f ≤ 47 GHz	-150 dBm	
	47 GHz < f ≤ 50 GHz	-146 dBm	
	50 GHz < f ≤ 52 GHz	-154 dBm	
	52 GHz < f ≤ 54 GHz	-152 dBm	
	54 GHz < f ≤ 62 GHz	-150 dBm	
	62 GHz < f ≤ 67 GHz	-147 dBm	
	add 1 dB to the above values for frequencies < 8 GHz, if the R&S®FSW-B1200/-B2001/-B800R option is installed		
	Improvement with noise cancellation	for noise-like signals	
		R&S®FSW-B24 option, model .66	
100 kHz < f ≤ 43 GHz		13 dB (nom.)	
43 GHz < f ≤ 67 GHz		0 dB (nom.)	
R&S®FSW-B24 option, model .67			
100 kHz < f ≤ 67 GHz	13 dB (nom.)		

Displayed average noise level of the R&S®FSW85	
	RF input 1, RF attenuation = 0 dB, termination = 50 Ω, normalized to 1 Hz RBW, trace average, average mode = log, sample detector, +5 °C to +40 °C
	2 Hz ≤ f ≤ 100 Hz      -105 dBm, typ. -115 dBm
	100 Hz < f ≤ 1 kHz      -110 dBm, typ. -120 dBm
	1 kHz < f < 9 kHz      -125 dBm, typ. -137 dBm
	RF input 1, RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, f ≥ 8 GHz: YIG preselector on
	9 kHz ≤ f ≤ 1 MHz      -135 dBm, typ. -140 dBm
	1 MHz < f ≤ 1 GHz      -145 dBm, typ. -150 dBm
	1 GHz < f < 3 GHz <sup>7</sup> -151 dBm, typ. -156 dBm
	1 GHz < f < 3 GHz <sup>8</sup> -154 dBm, typ. -159 dBm
	3 GHz ≤ f < 8 GHz      -151 dBm, typ. -156 dBm
	8 GHz ≤ f < 13.6 GHz      -146 dBm, typ. -150 dBm
	13.6 GHz ≤ f < 18 GHz      -144 dBm, typ. -148 dBm
	18 GHz ≤ f < 23 GHz      -141 dBm, typ. -145 dBm
	23 GHz ≤ f < 30 GHz      -137 dBm, typ. -141 dBm
	30 GHz ≤ f ≤ 34 GHz      -135 dBm, typ. -139 dBm
	34 GHz < f ≤ 44 GHz      -129 dBm, typ. -133 dBm
	44 GHz < f ≤ 58 GHz      -137 dBm, typ. -141 dBm
	58 GHz < f ≤ 70 GHz      -132 dBm, typ. -136 dBm
	70 GHz < f ≤ 75 GHz      -127 dBm, typ. -130 dBm
	75 GHz < f ≤ 80 GHz      -122 dBm, typ. -125 dBm
	80 GHz < f ≤ 85 GHz      -120 dBm, typ. -123 dBm
	add 1 dB to the above values for frequencies < 8 GHz, if the R&S®FSW-B1200/-B2001/-B800R option is installed
	RF input 1, RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, YIG preselector off, R&S®FSW-B90G option for f > 85 GHz
	8 GHz ≤ f < 13.6 GHz      -148 dBm
	13.6 GHz ≤ f < 18 GHz      -146 dBm
	18 GHz ≤ f < 23 GHz      -143 dBm
	23 GHz ≤ f < 30 GHz      -139 dBm
	30 GHz ≤ f ≤ 34 GHz      -137 dBm
	34 GHz < f ≤ 44 GHz      -131 dBm
	44 GHz < f ≤ 58 GHz      -147 dBm
	58 GHz < f ≤ 70 GHz      -143 dBm
	70 GHz < f ≤ 78 GHz      -135 dBm
	78 GHz < f ≤ 85 GHz      -130 dBm
	85 GHz < f ≤ 88 GHz      -125 dBm
	88 GHz < f ≤ 90 GHz      -120 dBm
	RF input 2, RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C
	add 1 dB to the above values for frequencies > 44 GHz
Improvement with noise cancellation	for noise-like signals
	f ≤ 43 GHz      13 dB (nom.)
	f > 43 GHz
	YIG preselector on      13 dB (nom.)
	YIG preselector off      0 dB (nom.)

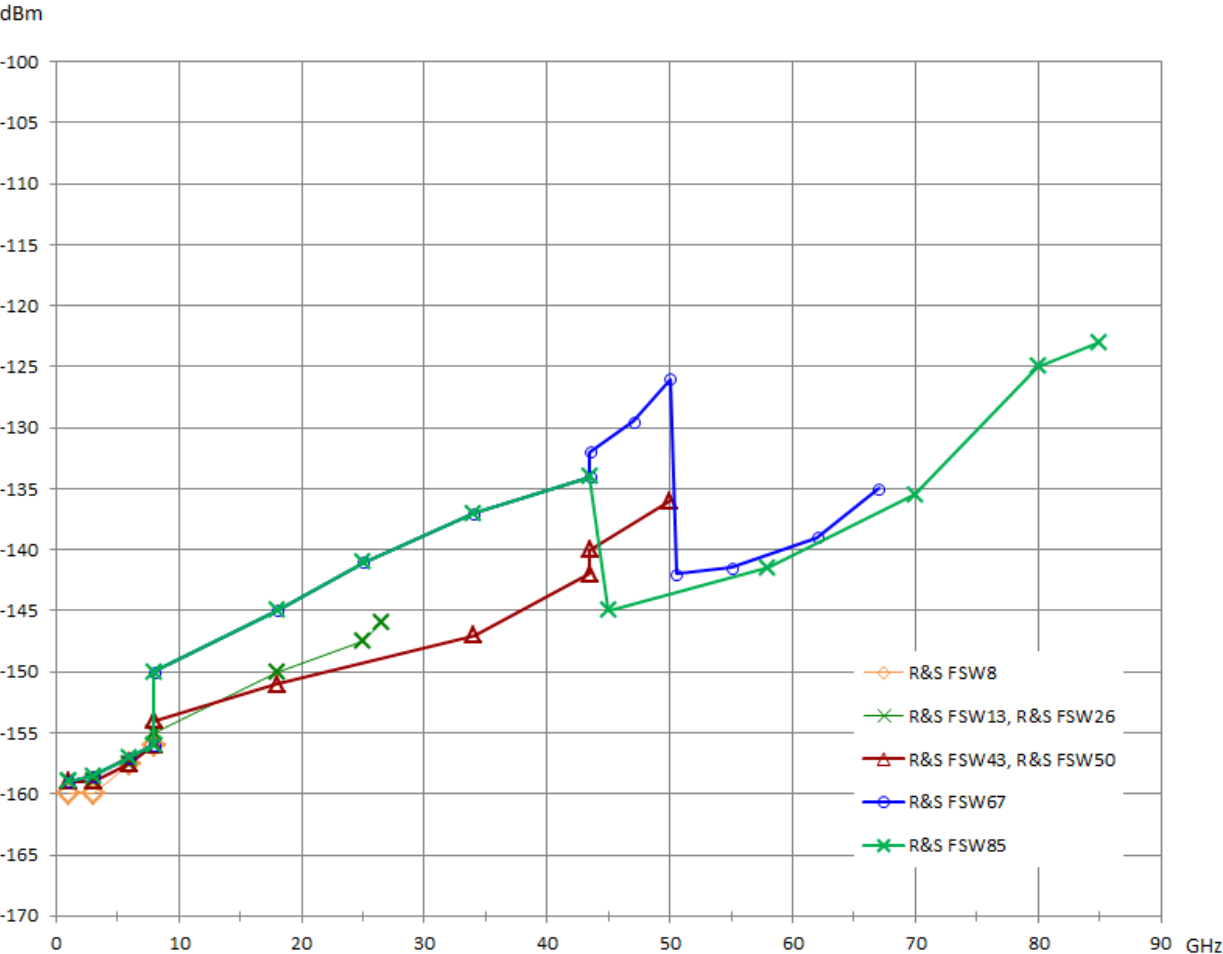

Typical displayed average noise level of the R&S®FSW models for f > 1 GHz without R&S®FSW-B24 RF preamplifier option.

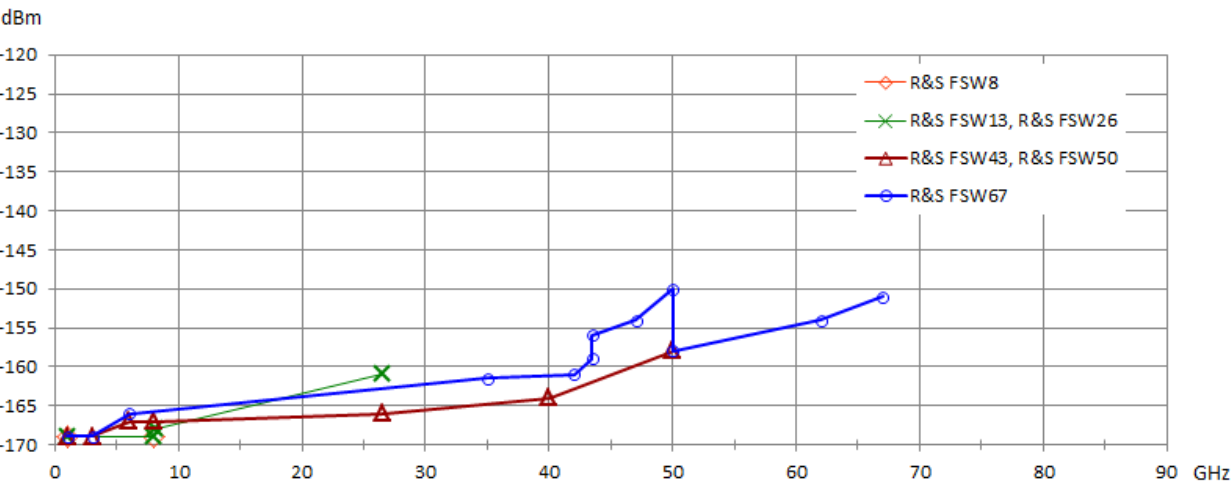

Typical displayed average noise level of the R&S®FSW models for f > 1 GHz with R&S®FSW-B24<sup>10</sup> RF preamplifier option, preamplifier gain = 30 dB.

<sup>10</sup> For frequencies > 43 GHz, the curve shown for the R&S®FSW50 applies to the R&S®FSW-B24 option model .51, the curve shown for the R&S®FSW67 applies to the R&S®FSW-B24 option model .67.

## Spurious responses

<b>Spurious responses</b>	YIG preselector on for $f \geq 8$ GHz, mixer level $\leq -10$ dBm <sup>11</sup> , sweep optimization: auto or dynamic	
Image response	$f_{in} - 2 \times 8997$ MHz (1st IF)	< -90 dBc
	$f_{in} - 2 \times 1317$ MHz (2nd IF)	< -90 dBc
	$f_{in} - 2 \times 37$ MHz (3rd IF)	< -90 dBc
Intermediate frequency response	1st IF (8997 MHz)	< -90 dBc
	2nd IF (1317 MHz)	< -90 dBc
	3rd IF (37 MHz)	< -90 dBc
Residual spurious response	RF attenuation = 0 dB	
	$f \leq 1$ MHz	< -90 dBm
	$1 \text{ MHz} < f \leq 8900$ MHz	< -110 dBm
	$8900 \text{ MHz} < f \leq 26.5$ GHz	< -100 dBm
	$26.5 \text{ GHz} < f \leq 85$ GHz	< -100 dBm
$f =$ receive frequency		
Local oscillator related spurious	$f_{in} < 1$ GHz	
	$10 \text{ Hz} \leq$ offset from carrier < 200 Hz	< -90 dBc
	offset from carrier > 200 Hz	< -100 dBc
	$f_{in} \geq 1$ GHz	
	$10 \text{ Hz} \leq$ offset from carrier < 200 Hz	< -90 dBc + 20 log ( $f_{in}/\text{GHz}$ )
	offset from carrier > 200 Hz	
	$f \leq 50$ GHz	< -100 dBc + 20 log ( $f_{in}/\text{GHz}$ )
	$f > 50$ GHz, RBW $\leq 10$ kHz	< -100 dBc + 20 log ( $f_{in}/\text{GHz}$ )
	$f > 50$ GHz, RBW > 10 kHz	< -80 dBc + 20 log ( $f_{in}/\text{GHz}$ )
	$f =$ receive frequency	
Vibrational environmental stimuli	max. 0.21 g RMS	< -60 dBc + 20 log ( $f_{in}/\text{GHz}$ ) (nom.)

<sup>11</sup> Mixer level = signal level – RF attenuation + preamplifier gain.

## Level measurement uncertainty

Absolute level uncertainty at 64 MHz	RBW = 10 kHz, level = -10 dBm, reference level = -10 dBm, RF attenuation = 10 dB without R&S®FSW-B25 option or electronic attenuator off	< 0.2 dB ( $\sigma = 0.07$ dB)
	with R&S®FSW-B25 option, electronic attenuator on	< 0.4 dB ( $\sigma = 0.14$ dB)
Frequency response, referenced to 64 MHz, YIG preselector on	RF attenuation = 10/20/30/40 dB, RF preamplifier off, +20 °C to +30 °C, electronic attenuator off	
	2 Hz $\leq f < 9$ kHz	< 1 dB (nom.)
	9 kHz $\leq f < 10$ MHz	< 0.45 dB ( $\sigma = 0.17$ dB)
	10 MHz $\leq f < 3.6$ GHz <sup>12</sup>	< 0.3 dB ( $\sigma = 0.10$ dB)
	10 MHz $\leq f < 3.6$ GHz <sup>13</sup>	< 0.5 dB ( $\sigma = 0.17$ dB)
	3.6 GHz $\leq f \leq 8$ GHz	< 0.5 dB ( $\sigma = 0.17$ dB)
	8 GHz $< f < 22$ GHz, span $< 1$ GHz	< 1.5 dB ( $\sigma = 0.50$ dB)
	22 GHz $\leq f \leq 26.5$ GHz, span $< 1$ GHz	< 2 dB ( $\sigma = 0.67$ dB)
	26.5 GHz $< f \leq 50$ GHz, span $< 1$ GHz	< 2.5 dB ( $\sigma = 0.83$ dB)
	50 GHz $< f \leq 67$ GHz, span $< 1$ GHz	< 3.0 dB ( $\sigma = 1.0$ dB)
	67 GHz $< f \leq 85$ GHz, span $< 1$ GHz	< 3.5 dB ( $\sigma = 1.17$ dB)
	any RF attenuation or electronic attenuator on, +15 °C to +40 °C	
	2 Hz $\leq f < 9$ kHz	< 1 dB (nom.)
	9 kHz $\leq f < 3.6$ GHz	< 0.6 dB ( $\sigma = 0.20$ dB)
	3.6 GHz $\leq f \leq 8$ GHz	< 0.8 dB ( $\sigma = 0.27$ dB)
	8 GHz $< f < 22$ GHz, span $< 1$ GHz	< 2 dB ( $\sigma = 0.67$ dB)
	22 GHz $\leq f \leq 26.5$ GHz, span $< 1$ GHz	< 2.5 dB ( $\sigma = 0.83$ dB)
	26.5 GHz $< f \leq 50$ GHz, span $< 1$ GHz	< 3 dB ( $\sigma = 1.0$ dB)
	50 GHz $< f \leq 67$ GHz, span $< 1$ GHz	< 3.5 dB ( $\sigma = 1.17$ dB)
	67 GHz $< f \leq 85$ GHz, span $< 1$ GHz	< 4.0 dB ( $\sigma = 1.33$ dB)
	RF attenuation $\leq 20$ dB, RF preamplifier on, +20 °C to +30 °C	
	10 MHz $\leq f < 3.6$ GHz	< 0.6 dB ( $\sigma = 0.2$ dB)
	3.6 GHz $\leq f \leq 8$ GHz	< 0.8 dB ( $\sigma = 0.27$ dB)
8 GHz $< f < 22$ GHz, span $< 1$ GHz	< 2 dB ( $\sigma = 0.67$ dB)	
22 GHz $\leq f \leq 26.5$ GHz, span $< 1$ GHz	< 2.5 dB ( $\sigma = 0.83$ dB)	
26.5 GHz $< f \leq 50$ GHz, span $< 1$ GHz	< 3 dB ( $\sigma = 1.0$ dB)	
50 GHz $< f \leq 67$ GHz, span $< 1$ GHz	< 3.5 dB ( $\sigma = 1.17$ dB)	
Frequency response, referenced to 64 MHz, YIG preselector off (requires R&S®FSW-B90G option for $f > 85$ GHz)	RF attenuation = 10/20/30/40 dB, RF preamplifier off, +20 °C to +30 °C, electronic attenuator off	
	$f < 8$ GHz	same values as with preselector on
	8 GHz $\leq f < 22$ GHz	< 1.5 dB ( $\sigma = 0.5$ dB)
	22 GHz $\leq f \leq 26.5$ GHz	< 2 dB ( $\sigma = 0.6$ dB)
	26.5 GHz $< f \leq 67$ GHz, span $< 1$ GHz	< 2.5 dB ( $\sigma = 0.83$ dB)
	67 GHz $< f \leq 90$ GHz, span $< 1$ GHz	< 3 dB ( $\sigma = 1.0$ dB)
	any RF attenuation or electronic attenuator on, +15 °C to +40 °C	
	$f < 8$ GHz	same values as with preselector on
	8 GHz $\leq f < 22$ GHz	< 2 dB ( $\sigma = 0.6$ dB)
	22 GHz $\leq f \leq 26.5$ GHz	< 2.5 dB ( $\sigma = 0.75$ dB)
	26.5 GHz $< f \leq 67$ GHz, span $< 1$ GHz	< 3 dB ( $\sigma = 1.0$ dB)
	67 GHz $< f \leq 90$ GHz, span $< 1$ GHz	< 3.5 dB ( $\sigma = 1.17$ dB)
	RF attenuation $\leq 20$ dB, RF preamplifier on, +20 °C to +30 °C	
	$f < 8$ GHz	same values as with preselector on
	8 GHz $\leq f < 22$ GHz	< 2 dB ( $\sigma = 0.6$ dB)
	22 GHz $\leq f \leq 26.5$ GHz	< 2.5 dB ( $\sigma = 0.75$ dB)
26.5 GHz $< f \leq 67$ GHz, span $< 1$ GHz	< 3 dB ( $\sigma = 1.0$ dB)	
Attenuator switching uncertainty	$f = 64$ MHz, 0 dB to 70 dB, referenced to 10 dB attenuation	< 0.2 dB ( $\sigma = 0.07$ dB)
Uncertainty of reference level setting	input mixer level $\leq -15$ dBm	0 dB <sup>14</sup>
	input mixer level $> -15$ dBm	< 0.1 dB (nom.)
Bandwidth switching uncertainty	referenced to RBW = 10 kHz	< 0.1 dB ( $\sigma = 0.04$ dB) <sup>15</sup>

<sup>12</sup> With R&S®FSW8, R&S®FSW13, R&S®FSW26, R&S®FSW43, R&S®FSW50, R&S®FSW67.

<sup>13</sup> With R&S®FSW85.

<sup>14</sup> The reference level setting affects only the graphical representation of the measurement result on the display, not the measurement itself.  
The reference level setting causes no additional uncertainty in measurement results.

<sup>15</sup> Nominal values for RBW = 3.9 kHz and RBW = 6.25 kHz.

<b>Nonlinearity of displayed level</b>		
Logarithmic level display	S/N > 16 dB, 0 dB ≤ level ≤ -70 dB	< 0.1 dB ( $\sigma = 0.04$ dB)
	S/N > 16 dB, -70 dB < level ≤ -90 dB	< 0.2 dB ( $\sigma = 0.08$ dB)
Linear level display	S/N > 16 dB, 0 dB to -70 dB	< 5 % of reference level (nom.)

<b>Total measurement uncertainty</b>		
YIG preselector on	signal level = 0 dB to -70 dB below reference level, S/N > 20 dB, sweep time = auto, RF attenuation = 10/20/30/40 dB, RF preamplifier off, electronic attenuator off, span/RBW < 100, 95 % confidence level, +20 °C to +30 °C	
	9 kHz ≤ f ≤ 10 MHz	±0.37 dB
	10 MHz < f ≤ 3.6 GHz	±0.27 dB
	3.6 GHz < f ≤ 8 GHz	±0.37 dB
	8 GHz < f ≤ 22 GHz	±1.4 dB
	22 GHz < f ≤ 26.5 GHz	±1.7 dB
	26.5 GHz < f ≤ 50 GHz	±2.5 dB
	50 GHz < f ≤ 67 GHz	±2.8 dB
YIG preselector off (requires R&S®FSW-B90G option for f > 85 GHz)	signal level = 0 dB to -70 dB below reference level, S/N > 20 dB, sweep time = auto, RF attenuation = 10/20/30/40 dB, RF preamplifier off, electronic attenuator off, span/RBW < 100, 95 % confidence level, +20 °C to +30 °C	
	8 GHz ≤ f ≤ 22 GHz	±1.0 dB
	22 GHz < f ≤ 26.5 GHz	±1.2 dB
	26.5 GHz < f ≤ 67 GHz	±1.7 dB
	67 GHz < f ≤ 90 GHz	±2.0 dB

## Adjacent channel power dynamic range

<b>Adjacent channel leakage ratio (ACLR)</b>	3GPP WCDMA, single carrier, 1 DPCH, carrier frequency = 2 GHz	
	noise cancellation off <sup>16</sup>	
	1st adjacent channel	-76 dB (nom.)
	2nd adjacent channel	-82 dB (nom.)
	noise cancellation on	
	1st adjacent channel	-88 dB (nom.)
	2nd adjacent channel	-90 dB (nom.)

<b>Optimum mixer level</b>	3GPP WCDMA, single carrier, 1 DPCH, carrier frequency = 2 GHz	
	noise cancellation off	
	1st adjacent channel	-5 dBm (nom.)
	2nd adjacent channel	0 dBm (nom.)
	noise cancellation on	
	1st adjacent channel	-12 dBm (nom.)
	2nd adjacent channel	-5 dBm (nom.)

<sup>16</sup> Noise cancellation off represents the raw performance of the R&S®FSW without numeric compensation for its inherent noise.

## Trigger functions

<b>Trigger</b>		
Trigger source	spectrum analysis	free run, video, external, IF power, RF power
	I/Q analyzer or modulation analysis	I/Q trigger additionally <sup>17</sup>
Trigger offset	span $\geq$ 10 Hz	5 ns to 20 s
	span = 0 Hz	(–sweep time) to 20 s
Min. trigger offset resolution	span > 0 Hz	5 ns
	span = 0 Hz, trigger offset > 0	5 ns
	span = 0 Hz, trigger offset < 0	sweep time/number of sweep points
Max. deviation of trigger offset		5 ns
<b>IF power trigger</b>		
Sensitivity	min. signal power	
	spectrum analysis	–60 dBm + RF attenuation – RF preamplifier gain (nom.)
	I/Q analyzer or modulation analysis	
	set analysis bandwidth $\leq$ 80 MHz	–60 dBm + RF attenuation – RF preamplifier gain (nom.)
	set analysis bandwidth > 80 MHz	–30 dBm + RF attenuation – RF preamplifier gain (nom.)
max. signal power	–10 dBm + RF attenuation – RF preamplifier gain (nom.)	
IF power trigger bandwidth	RBW > 500 kHz	20 MHz (nom.) <sup>18</sup>
	RBW $\leq$ 500 kHz, FFT	20 MHz (nom.)
	RBW $\leq$ 500 kHz, swept	6 MHz (nom.)
<b>RF power trigger</b>		
Sensitivity	min. signal power	–30 dBm + RF attenuation – RF preamplifier gain (nom.)
	max. signal power	+10 dBm + RF attenuation – RF preamplifier gain (nom.)
RF power trigger frequency range	f $\leq$ 8 GHz	8 GHz (nom.)
	f > 8 GHz	center frequency $\pm$ 250 MHz (nom.) <sup>19</sup>
<b>Gated sweep</b>		
Gate source		video, external, IF power, RF power
Gate delay		5 ns to 20 s, min. resolution 5 ns
Gate length		5 ns to 20 s, min. resolution 5 ns
Max. deviation of gate length		$\pm$ 5 ns

## Audio demodulator

<b>Demodulation</b>		
AF demodulation types		AM and FM
Audio output		loudspeaker and phone jack
Marker stop time in spectrum mode		100 ms to 60 s

<sup>17</sup> Not available for analysis bandwidth > 160 MHz if the R&S®FSW-B320 option is installed.

<sup>18</sup> Sweep optimization = auto.

## I/Q data

The specifications in this section apply to the base unit and the R&S®FSW-B28/-B40/-B80/-B160/-B320/-B512/-B512R/-B1200/-B2001/-B800R options.

For specifications of the R&S®FSW-B2000/-B5000 options, see sections “R&S®FSW-B2000 2 GHz analysis bandwidth” and “R&S®FSW-B5000 5 GHz analysis bandwidth”.

Record length	standard	
	with R&S®FSW-B28/-B40/-B80/-B160/-B512/-B512R options	max. 440 Msample I and Q
	with R&S®FSW-B320 option	max. 195 Msample I and Q
	with R&S®FSW-B1200/-B2001/-B800R options	max. 220 Msample I and Q
	R&S®FSW-B106 option (requires R&S®FSW-B160/-B320 options)	
	160 MHz analysis bandwidth	max. 1320 Msample I and Q
	320 MHz analysis bandwidth	max. 600 Msample I and Q
	R&S®FSW-B108 option (requires R&S®FSW-B1200/-B2001/-B800R options)	
	512 MHz analysis bandwidth	max. 1800 Msample I and Q
	1000 MHz analysis bandwidth	max. 900 Msample I and Q
Word length of I/Q samples	sampling rate > 100 MHz or number of samples > 300 Msample	18 bit
	otherwise	24 bit

Sampling rate	standard	100 Hz to 200 MHz
	with R&S®FSW-B28/-B40/-B80 options	100 Hz to 200 MHz
	with R&S®FSW-B160/-B320 options	100 Hz to 1 GHz
	with R&S®FSW-B512/-B512R option	100 Hz to 1.2 GHz
	with R&S®FSW-B1200 option	100 Hz to 2.4 GHz
	with R&S®FSW-B2001/-B800R option	100 Hz to 2.4 GHz
Max. signal analysis bandwidth (equalized)	standard	10 MHz (nom.)
	with R&S®FSW-B28 option	28 MHz (nom.) <sup>19</sup>
	with R&S®FSW-B40 option	40 MHz (nom.) <sup>19</sup>
	with R&S®FSW-B80 option	80 MHz (nom.) <sup>19</sup>
	with R&S®FSW-B160 option	160 MHz (nom.) <sup>19</sup>
	with R&S®FSW-B320 option	320 MHz (nom.) <sup>19</sup>
	with R&S®FSW-B512/-B512R option	512 MHz (nom.) <sup>19</sup>
	with R&S®FSW-B1200 option	1200 MHz (nom.) <sup>20</sup>
with R&S®FSW-B2001/-B800R option	2000 MHz (nom.) <sup>20</sup>	
<b>Signal analysis bandwidth ≤ 80 MHz</b>		
Amplitude flatness	$(1.25 \times \text{signal analysis BW}) \leq f_{\text{center}} < 8 \text{ GHz}$	±0.3 dB (nom.) <sup>21</sup>
	$f_{\text{center}} \geq 8 \text{ GHz}$ , YIG preselector off	±0.5 dB (nom.)
Deviation from linear phase	$(1.25 \times \text{signal analysis BW}) \leq f_{\text{center}} < 8 \text{ GHz}$	±1° (nom.)
	$f_{\text{center}} \geq 8 \text{ GHz}$ , YIG preselector off	±2° (nom.)
Nonlinearity of displayed level		see section “Level measurement uncertainty – Nonlinearity of displayed level”
Level measurement uncertainty		see “Total measurement uncertainty – YIG preselector off”
Third-order intermodulation distortion		see “Third-order intercept point (TOI)”
ADC related spurious response	mixer level = -30 dBm <sup>22</sup>	
	analysis bandwidth < 17 MHz	-100 dBc (nom.)
	17 MHz ≤ analysis bandwidth < 80 MHz	-80 dBc (nom.)
Other spurious responses		see section “Spurious responses”

<sup>19</sup> YIG preselector off for  $f \geq 8 \text{ GHz}$ .

<sup>20</sup> YIG preselector off for  $f \geq 12 \text{ GHz}$ .

<sup>21</sup> For R&S®FSW67 and R&S®FSW85:  $100 \text{ MHz} \leq f_{\text{center}} < 8 \text{ GHz}$ .

<sup>22</sup> Level of a tone at the input mixer (also abbreviated as mixer level) = signal level – RF attenuation + preamplifier gain.



<b>Signal analysis bandwidth 80 MHz to 160 MHz</b> <sup>23</sup>		
Amplitude flatness	RF attenuation = 10/20/30/40 dB, RF preamplifier off, electronic attenuator off, YIG preselector off for $f \geq 8$ GHz	
	$150 \text{ MHz} \leq f_{\text{center}} < 4 \text{ GHz}$	$\pm 0.5 \text{ dB (nom.)}$
	$4 \text{ GHz} \leq f_{\text{center}} < 8 \text{ GHz}$	$\pm 0.7 \text{ dB (nom.)}$
	$8 \text{ GHz} \leq f_{\text{center}} < 26.5 \text{ GHz}$	$\pm 1 \text{ dB (nom.)}$
	$26.5 \text{ GHz} \leq f_{\text{center}} \leq 67 \text{ GHz}$	$\pm 2 \text{ dB (nom.)}$
Deviation from linear phase	RF attenuation = 10/20/30/40 dB, RF preamplifier off, electronic attenuator off, YIG preselector off for $f \geq 8$ GHz	
	$150 \text{ MHz} \leq f_{\text{center}} < 4 \text{ GHz}$	$\pm 1^\circ \text{ (nom.)}$
	$4 \text{ GHz} \leq f_{\text{center}} < 8 \text{ GHz}$	$\pm 2^\circ \text{ (nom.)}$
	$8 \text{ GHz} \leq f_{\text{center}} < 43.5 \text{ GHz}$	$\pm 1.5^\circ \text{ (nom.)}$
	$43.5 \text{ GHz} \leq f_{\text{center}} \leq 67 \text{ GHz}$	$\pm 2^\circ \text{ (nom.)}$
Nonlinearity of displayed level	0 dB to -70 dB	
	$< 0.15 \text{ dB (nom.)}$	
Level measurement uncertainty at center frequency	add 0.2 dB (nom.) to the values in "Total measurement uncertainty – YIG preselector off"	
Third-order intermodulation distortion	reference level = signal level + 6 dB	
	$150 \text{ MHz} \leq f_{\text{center}} < 8 \text{ GHz}$ : two -20 dBm tones at input mixer within analysis bandwidth <sup>22</sup> , $f_{\text{center}} \geq 8 \text{ GHz}$ : two -30 dBm tones at input mixer within analysis bandwidth <sup>22</sup>	-75 dBc (nom.)
Residual spurious response	RF attenuation 0 dB, $f_{\text{center}} \geq 150 \text{ MHz}$	-90 dBm (nom.)
ADC related spurious response	single tone within analysis bandwidth, mixer level = -10 dBm <sup>22</sup> , reference level = signal level, $f_{\text{center}} \geq 150 \text{ MHz}$	-78 dBc (nom.)
Other spurious responses	see section "Spurious responses"	

<b>Signal analysis bandwidth <math>\leq 96</math> MHz within R&amp;S®FSW-K193 DOCSIS 3.1 OFDM upstream option</b> <sup>25</sup>		
Amplitude flatness	RF attenuation = 10/20/30/40 dB, RF preamplifier off, electronic attenuator off	
	$5 \text{ MHz} \leq f \leq 204 \text{ MHz}$	$\pm 0.6 \text{ dB (nom.)}$
Deviation from linear phase	RF attenuation = 10/20/30/40 dB, RF preamplifier off, electronic attenuator off	
	$5 \text{ MHz} \leq f \leq 204 \text{ MHz}$	$\pm 2^\circ \text{ (nom.)}$
Nonlinearity of displayed level	0 dB to -70 dB	
Level measurement uncertainty at center frequency	add 0.2 dB (nom.) to the values in "Total measurement uncertainty – YIG preselector off"	
Third-order intermodulation distortion	reference level = signal level + 6 dB	
	$5 \text{ MHz} \leq f \leq 204 \text{ MHz}$ : two -20 dBm tones at input mixer within analysis bandwidth <sup>22</sup> ,	-75 dBc (nom.)
Residual spurious response	RF attenuation 0 dB, $5 \text{ MHz} \leq f \leq 204 \text{ MHz}$	-90 dBm (nom.)
ADC related spurious response	single tone within analysis bandwidth, mixer level = -10 dBm <sup>22</sup> , reference level = signal level, $5 \text{ MHz} \leq f \leq 204 \text{ MHz}$	-78 dBc (nom.)
Other spurious responses	see section "Spurious responses"	

<sup>23</sup> The specifications for 80 MHz to 160 MHz analysis bandwidth in this section apply to the following options: R&S®FSW-B160, R&S®FSW-B320.

<sup>24</sup>  $f_{\text{center}} > 85 \text{ GHz}$  requires R&S®FSW-B90G option.

<sup>25</sup> The specifications in this section apply in combination with the R&S®FSW-B320 option or R&S®FSW-B512 option.

Signal analysis bandwidth 160 MHz to 320 MHz <sup>26</sup>		
Amplitude flatness	RF attenuation = 10/20/30/40 dB, RF preamplifier off, electronic attenuator off, YIG preselector off for $f \geq 8$ GHz	
	$200 \text{ MHz} \leq f_{\text{center}} < 4 \text{ GHz}$	$\pm 0.7 \text{ dB (nom.)}$
	$4 \text{ GHz} \leq f_{\text{center}} < 7 \text{ GHz}$	$\pm 1.2 \text{ dB (nom.)}$
	$7 \text{ GHz} \leq f_{\text{center}} < 8 \text{ GHz}$ <sup>27</sup>	$\pm 1.4 \text{ dB (nom.)}$
	$8 \text{ GHz} \leq f_{\text{center}} < 22 \text{ GHz}$	$\pm 1.6 \text{ dB (nom.)}$
	$22 \text{ GHz} \leq f_{\text{center}} \leq 43.5 \text{ GHz}$	$\pm 2 \text{ dB (nom.)}$
	$43.5 \text{ GHz} < f_{\text{center}} \leq 67 \text{ GHz}$	$\pm 2.5 \text{ dB (nom.)}$
Deviation from linear phase	RF attenuation = 10/20/30/40 dB, RF preamplifier off, electronic attenuator off, YIG preselector off for $f \geq 8$ GHz	
	$200 \text{ MHz} \leq f_{\text{center}} < 4 \text{ GHz}$	$\pm 2.5^\circ \text{ (nom.)}$
	$4 \text{ GHz} \leq f_{\text{center}} < 8 \text{ GHz}$ <sup>27</sup>	$\pm 4^\circ \text{ (nom.)}$
	$8 \text{ GHz} \leq f_{\text{center}} < 43.5 \text{ GHz}$	$\pm 2.5^\circ \text{ (nom.)}$
	$43.5 \text{ GHz} \leq f_{\text{center}} \leq 67 \text{ GHz}$	$\pm 4^\circ \text{ (nom.)}$
Nonlinearity of displayed level	$0 \text{ dB to } -70 \text{ dB}$	$< 0.15 \text{ dB (nom.)}$
	Level measurement uncertainty at center frequency	add 0.2 dB (nom.) to the values in "Total measurement uncertainty – YIG preselector off"
Third-order intermodulation distortion	reference level = signal level + 6 dB	
	$200 \text{ MHz} \leq f_{\text{center}} < 8 \text{ GHz}$ : two $-20 \text{ dBm}$ tones at input mixer within analysis bandwidth <sup>22</sup> , $f_{\text{center}} \geq 8 \text{ GHz}$ : two $-30 \text{ dBm}$ tones at input mixer within analysis bandwidth <sup>22</sup>	$-75 \text{ dBc (nom.)}$
Residual spurious response	RF attenuation 0 dB, $f_{\text{center}} \geq 200 \text{ MHz}$	$-90 \text{ dBm (nom.)}$
ADC related spurious response	single tone within analysis bandwidth, mixer level = $-10 \text{ dBm}$ <sup>22</sup> , reference level = signal level	
	$200 \text{ MHz} \leq f_{\text{center}} \leq 460 \text{ MHz}$	$-70 \text{ dBc (nom.)}$
Other spurious responses	$f_{\text{center}} > 460 \text{ MHz}$	$-72 \text{ dBc (nom.)}$
	see section "Spurious responses"	

<sup>26</sup> The specifications for 160 MHz to 320 MHz analysis bandwidth in this section apply to the R&S®FSW-B320 option.

<sup>27</sup> To obtain the set analysis bandwidth,  $(f_{\text{center}} + \frac{1}{2} \text{ analysis bandwidth}) \leq 8 \text{ GHz}$  must be met.

Signal analysis bandwidth 80 MHz to 512 MHz with R&S®FSW-B512 option or R&S®FSW-B512R option		
Amplitude flatness	RF attenuation = 10/20/30/40 dB, RF preamplifier off, electronic attenuator off, YIG preselector off for $f \geq 8$ GHz	
	analysis bandwidth $\leq 160$ MHz	
	$150 \text{ MHz} \leq f_{\text{center}} < 4 \text{ GHz}$	$\pm 0.4 \text{ dB (nom.)}$
	$4 \text{ GHz} \leq f_{\text{center}} \leq 8 \text{ GHz}$	$\pm 0.6 \text{ dB (nom.)}$
	analysis bandwidth $\leq 500$ MHz	
	$260 \text{ MHz} \leq f_{\text{center}} < 4 \text{ GHz}$	$\pm 0.5 \text{ dB (nom.)}$
	$4 \text{ GHz} \leq f_{\text{center}} \leq 8 \text{ GHz}^{27}$	$\pm 0.7 \text{ dB (nom.)}$
	analysis bandwidth $\leq 512$ MHz	
	$460 \text{ MHz} \leq f_{\text{center}} < 4 \text{ GHz}$	$\pm 0.5 \text{ dB (nom.)}$
	$4 \text{ GHz} \leq f_{\text{center}} \leq 8 \text{ GHz}^{27}$	$\pm 0.7 \text{ dB (nom.)}$
	any analysis bandwidth	
	$8 \text{ GHz} < f_{\text{center}} \leq 26.5 \text{ GHz}$	$\pm 1.0 \text{ dB (nom.)}$
	$26.5 \text{ GHz} < f_{\text{center}} \leq 43.5 \text{ GHz}$	$\pm 1.5 \text{ dB (nom.)}$
	$43.5 \text{ GHz} < f_{\text{center}} \leq 67 \text{ GHz}$	$\pm 2 \text{ dB (nom.)}$
$67 \text{ GHz} < f_{\text{center}} \leq 85 \text{ GHz}/90 \text{ GHz}^{24}$	$\pm 2.5 \text{ dB (nom.)}$	
Deviation from linear phase	RF attenuation = 10/20/30/40 dB, RF preamplifier off, electronic attenuator off, YIG preselector off for $f \geq 8$ GHz	
	analysis bandwidth $\leq 160$ MHz	
	$150 \text{ MHz} \leq f_{\text{center}} < 4 \text{ GHz}$	$\pm 1^\circ \text{ (nom.)}$
	$4 \text{ GHz} \leq f_{\text{center}} \leq 8 \text{ GHz}$	$\pm 2^\circ \text{ (nom.)}$
	$8 \text{ GHz} < f_{\text{center}} \leq 43.5 \text{ GHz}$	$\pm 1.5^\circ \text{ (nom.)}$
	$43.5 \text{ GHz} < f_{\text{center}} \leq 67 \text{ GHz}$	$\pm 2^\circ \text{ (nom.)}$
	$67 \text{ GHz} < f_{\text{center}} \leq 85 \text{ GHz}/90 \text{ GHz}^{24}$	$\pm 8^\circ \text{ (nom.)}$
	analysis bandwidth $\leq 500$ MHz	
	$260 \text{ MHz} \leq f_{\text{center}} < 4 \text{ GHz}$	$\pm 1.5^\circ \text{ (nom.)}$
	$4 \text{ GHz} \leq f_{\text{center}} \leq 8 \text{ GHz}$	$\pm 2^\circ \text{ (nom.)}$
	$8 \text{ GHz} < f_{\text{center}} \leq 43.5 \text{ GHz}$	$\pm 3^\circ \text{ (nom.)}$
	$43.5 \text{ GHz} < f_{\text{center}} \leq 67 \text{ GHz}$	$\pm 5^\circ \text{ (nom.)}$
	$67 \text{ GHz} < f_{\text{center}} \leq 85 \text{ GHz}/90 \text{ GHz}^{24}$	$\pm 8^\circ \text{ (nom.)}$
	analysis bandwidth $\leq 512$ MHz	
	$460 \text{ MHz} \leq f_{\text{center}} < 4 \text{ GHz}$	$\pm 1.5^\circ \text{ (nom.)}$
	$4 \text{ GHz} \leq f_{\text{center}} \leq 8 \text{ GHz}$	$\pm 2^\circ \text{ (nom.)}$
	$8 \text{ GHz} < f_{\text{center}} \leq 43.5 \text{ GHz}$	$\pm 3^\circ \text{ (nom.)}$
	$43.5 \text{ GHz} < f_{\text{center}} \leq 67 \text{ GHz}$	$\pm 5^\circ \text{ (nom.)}$
	$67 \text{ GHz} < f_{\text{center}} \leq 85 \text{ GHz}/90 \text{ GHz}^{24}$	$\pm 8^\circ \text{ (nom.)}$
Nonlinearity of displayed level	0 dB to $-70$ dB	$< 0.15 \text{ dB (nom.)}$
Level measurement uncertainty at center frequency		add 0.2 dB (nom.) to the values in "Total measurement uncertainty – YIG preselector off"
Third-order intermodulation distortion	reference level = signal level + 6 dB	
	$f_{\text{center}} \leq 8 \text{ GHz}$ : two $-20$ dBm tones at input mixer within analysis bandwidth <sup>22</sup>	$-70 \text{ dBc (nom.)}$
	$f_{\text{center}} > 8 \text{ GHz}$ : two $-25$ dBm tones at input mixer within analysis bandwidth <sup>22</sup> , YIG preselector off	
Residual spurious response	RF attenuation 0 dB, analysis bandwidth $\leq 160$ MHz and $f_{\text{center}} \geq 150$ MHz, or analysis bandwidth $\leq 512$ MHz and $f_{\text{center}} \geq 650$ MHz, YIG preselector off for $f \geq 8$ GHz	$-90 \text{ dBm (nom.)}$
ADC related spurious response	single tone at center frequency	$-78 \text{ dBc (nom.)}$
	single tone within analysis bandwidth, mixer level = $-15$ dBm <sup>22</sup> , reference level = signal level, analysis bandwidth $\leq 160$ MHz and $f_{\text{center}} \geq 150$ MHz, or analysis bandwidth $\leq 512$ MHz and $f_{\text{center}} \geq 260$ MHz, YIG preselector off for $f \geq 8$ GHz	$-70 \text{ dBc (nom.)}$
Other spurious responses		see section "Spurious responses"

Signal analysis bandwidth 80 MHz to 1200 MHz with R&S®FSW-B1200 option and 80 MHz to 2000 MHz with R&S®FSW-B2001/B800R option (options available for all models except R&S®FSW8, R&S®FSW13)		
The specifications in this section apply to the following conditions: YIG preselector off for $f \geq 12$ GHz, +20 °C to +30 °C.		
Frequency range (center frequency)	analysis bandwidth = 1200 MHz	650 MHz to maximum receiving frequency – 600 MHz
	analysis bandwidth = 2000 MHz	1050 MHz to maximum receiving frequency – 1000 MHz
Amplitude flatness	RF attenuation = 10 / 20 / 30 / 40 dB, RF preamplifier off, electronic attenuator off	
	analysis bandwidth $\leq 1200$ MHz	
	$650 \text{ MHz}^{28} \leq f_{\text{center}} < 8 \text{ GHz}$	$\pm 1.0 \text{ dB}$ , ( $\sigma = 0.33 \text{ dB}$ )
	$8 \text{ GHz} \leq f_{\text{center}} < 22 \text{ GHz}$	$\pm 1.2 \text{ dB}$ , ( $\sigma = 0.40 \text{ dB}$ )
	$22 \text{ GHz} \leq f_{\text{center}} \leq 26.5 \text{ GHz}$	$\pm 1.4 \text{ dB}$ , ( $\sigma = 0.47 \text{ dB}$ )
	$26.5 \text{ GHz} < f_{\text{center}} \leq 42.9 \text{ GHz}$	$\pm 1.6 \text{ dB}$ , ( $\sigma = 0.53 \text{ dB}$ )
	$42.9 \text{ GHz} < f_{\text{center}} \leq 50 \text{ GHz}$	$\pm 1.7 \text{ dB}$ , ( $\sigma = 0.57 \text{ dB}$ )
	$50 \text{ GHz} < f_{\text{center}} \leq 67 \text{ GHz}$	$\pm 2.0 \text{ dB}$ , ( $\sigma = 0.67 \text{ dB}$ )
	$67 \text{ GHz} < f_{\text{center}} \leq 85 \text{ GHz}/90 \text{ GHz}^{24}$	$\pm 2.5 \text{ dB}$ , ( $\sigma = 0.83 \text{ dB}$ )
	analysis bandwidth $\leq 2000$ MHz	
	$1050 \text{ MHz}^{28} \leq f_{\text{center}} < 4 \text{ GHz}$	$\pm 1.0 \text{ dB}$ , ( $\sigma = 0.33 \text{ dB}$ )
	$4 \text{ GHz} \leq f_{\text{center}} < 42.5 \text{ GHz}$	$\pm 2.0 \text{ dB}$ , ( $\sigma = 0.67 \text{ dB}$ )
	$42.5 \text{ GHz} < f_{\text{center}} \leq 66.5 \text{ GHz}$	$\pm 2.5 \text{ dB}$ , ( $\sigma = 0.83 \text{ dB}$ )
	$66.5 \text{ GHz} < f_{\text{center}} \leq 85 \text{ GHz}/90 \text{ GHz}^{29}$	$\pm 3.0 \text{ dB}$ , ( $\sigma = 1.0 \text{ dB}$ )
Deviation from linear phase	RF attenuation = 10 / 20 / 30 / 40 dB, RF preamplifier off, electronic attenuator off	
	analysis bandwidth $\leq 160$ MHz	
	$150 \text{ MHz}^{28} \leq f_{\text{center}} < 4 \text{ GHz}$	$\pm 1^\circ$ (nom.)
	$4 \text{ GHz} \leq f_{\text{center}} \leq 8 \text{ GHz}$	$\pm 2^\circ$ (nom.)
	$8 \text{ GHz} < f_{\text{center}} \leq 43.5 \text{ GHz}$	$\pm 1.5^\circ$ (nom.)
	$43.5 \text{ GHz} < f_{\text{center}} \leq 67 \text{ GHz}$	$\pm 2^\circ$ (nom.)
	$67 \text{ GHz} < f_{\text{center}} \leq 85 \text{ GHz}$	$\pm 8^\circ$ (nom.)
	analysis bandwidth $\leq 500$ MHz	
	$260 \text{ MHz}^{28} \leq f_{\text{center}} < 4 \text{ GHz}$	$\pm 1.5^\circ$ (nom.)
	$4 \text{ GHz} \leq f_{\text{center}} \leq 8 \text{ GHz}$	$\pm 2^\circ$ (nom.)
	$8 \text{ GHz} < f_{\text{center}} \leq 43.5 \text{ GHz}$	$\pm 3^\circ$ (nom.)
	$43.5 \text{ GHz} < f_{\text{center}} \leq 67 \text{ GHz}$	$\pm 5^\circ$ (nom.)
	$67 \text{ GHz} < f_{\text{center}} \leq 85 \text{ GHz}$	$\pm 8^\circ$ (nom.)
	analysis bandwidth $\leq 512$ MHz	
	$460 \text{ MHz}^{28} \leq f_{\text{center}} < 4 \text{ GHz}$	$\pm 1.5^\circ$ (nom.)
	$4 \text{ GHz} \leq f_{\text{center}} \leq 8 \text{ GHz}$	$\pm 2^\circ$ (nom.)
	$8 \text{ GHz} < f_{\text{center}} \leq 43.5 \text{ GHz}$	$\pm 3^\circ$ (nom.)
	$43.5 \text{ GHz} < f_{\text{center}} \leq 67 \text{ GHz}$	$\pm 5^\circ$ (nom.)
	$67 \text{ GHz} < f_{\text{center}} \leq 85 \text{ GHz}$	$\pm 8^\circ$ (nom.)
	analysis bandwidth $\leq 1200$ MHz	
	$650 \text{ MHz}^{28} \leq f_{\text{center}} < 4 \text{ GHz}$	$\pm 2.5^\circ$ (nom.)
	$4 \text{ GHz} \leq f_{\text{center}} < 13 \text{ GHz}$	$\pm 5^\circ$ (nom.)
	$13 \text{ GHz} \leq f_{\text{center}} \leq 37 \text{ GHz}$	$\pm 3.5^\circ$ (nom.)
	$37 \text{ GHz} < f_{\text{center}} \leq 40 \text{ GHz}$	$\pm 4^\circ$ (nom.)
	$40.0 \text{ GHz} < f_{\text{center}} \leq 42.9 \text{ GHz}$	$\pm 6^\circ$ (nom.)
	$42.9 \text{ GHz} < f_{\text{center}} \leq 85 \text{ GHz}$	$\pm 7^\circ$ (nom.)
	analysis bandwidth $\leq 2000$ MHz	
	$1050 \text{ MHz}^{28} \leq f_{\text{center}} < 4 \text{ GHz}$	$\pm 3^\circ$ (nom.)
	$4 \text{ GHz} \leq f_{\text{center}} < 13 \text{ GHz}$	$\pm 7^\circ$ (nom.)
	$13 \text{ GHz} \leq f_{\text{center}} \leq 37 \text{ GHz}$	$\pm 5^\circ$ (nom.)
$37 \text{ GHz} < f_{\text{center}} \leq 40 \text{ GHz}$	$\pm 6^\circ$ (nom.)	
$40.0 \text{ GHz} < f_{\text{center}} \leq 42.5 \text{ GHz}$	$\pm 8^\circ$ (nom.)	
$42.5 \text{ GHz} < f_{\text{center}} \leq 85 \text{ GHz}$	$\pm 10^\circ$ (nom.)	

<sup>28</sup> For R&S®FSW85 instruments the specification starts at 1 GHz center frequency for analysis bandwidths  $\leq 1200$  MHz and at 1.5 GHz center frequency for analysis bandwidths  $> 1200$  MHz.

<sup>29</sup>  $f_{\text{center}} > 66.5$  GHz requires R&S®FSW85.  $f_{\text{center}} > 85$  GHz requires R&S®FSW-B90G option.

Nonlinearity of displayed level	0 dB to -70 dB	< 0.15 dB (nom.)
Level measurement uncertainty at center frequency		add 0.2 dB (nom.) to the values in "Total measurement uncertainty – YIG preselector off"
Third-order intermodulation distortion	reference level = signal level + 6 dB $f_{\text{center}} \leq 8 \text{ GHz}$ : two -20 dBm tones at input mixer within analysis bandwidth <sup>22</sup> $f_{\text{center}} > 8 \text{ GHz}$ : two -25 dBm tones at input mixer within analysis bandwidth <sup>22</sup> , YIG preselector off	-70 dBc (nom.)
Residual spurious response	RF attenuation = 0 dB analysis bandwidth $\leq 160 \text{ MHz}$ $f_{\text{center}} \geq 150 \text{ MHz}$	-90 dBm (nom.)
	analysis bandwidth $\leq 512 \text{ MHz}$ $f_{\text{center}} \geq 650 \text{ MHz}$	-90 dBm (nom.)
	analysis bandwidth $\leq 1200 \text{ MHz}$ $700 \text{ MHz} \leq f_{\text{center}} < 8.1 \text{ GHz}$	-80 dBm (nom.)
	$8.1 \text{ GHz} \leq f_{\text{center}} < 9.4 \text{ GHz}$	-65 dBm (nom.)
	$9.4 \text{ GHz} \leq f_{\text{center}} \leq 12 \text{ GHz}$	-80 dBm (nom.)
	$12 \text{ GHz} < f_{\text{center}} \leq 30 \text{ GHz}$	-90 dBm (nom.)
	$30 \text{ GHz} < f_{\text{center}}$	-80 dBm (nom.)
	analysis bandwidth $\leq 2000 \text{ MHz}$ $1100 \text{ MHz} \leq f_{\text{center}} < 7.75 \text{ GHz}$	-80 dBm (nom.)
	$7.75 \text{ GHz} \leq f_{\text{center}} < 9.8 \text{ GHz}$	-60 dBm (nom.)
	$9.8 \text{ GHz} \leq f_{\text{center}} \leq 12 \text{ GHz}$	-80 dBm (nom.)
	$12 \text{ GHz} < f_{\text{center}} \leq 30 \text{ GHz}$	-90 dBm (nom.)
	$30 \text{ GHz} < f_{\text{center}}$	-80 dBm (nom.)
ADC related spurious response	single tone within analysis bandwidth, mixer level = -20 dBm <sup>22</sup> , reference level = signal level analysis bandwidth < 200 MHz	-80 dBc (nom.)
	$200 \text{ MHz} \leq \text{analysis bandwidth} \leq 512 \text{ MHz}$	-75 dBc (nom.)
	$512 \text{ MHz} < \text{analysis bandwidth} \leq 1200 \text{ MHz}$	-65 dBc (nom.)
	$1200 \text{ MHz} < \text{analysis bandwidth} \leq 2000 \text{ MHz}$	-60 dBc (nom.)
Other spurious responses		see section "Spurious responses"

## Inputs and outputs

RF input		
Impedance		50 $\Omega$
Connector	R&S®FSW8, R&S®FSW13	N female
	R&S®FSW26	APC 3.5 mm male (compatible with SMA)
	R&S®FSW43	2.92 mm male (compatible with SMA)
	R&S®FSW50, R&S®FSW67	1.85 mm male (compatible with 2.4 mm)
	R&S®FSW85, RF1 input	1.00 mm male
	R&S®FSW85, RF2 input	1.85 mm male (compatible with 2.4 mm)
VSWR of R&S®FSW8	RF attenuation $\leq 4$ dB	
	10 MHz $\leq f \leq 8$ GHz	typ. 1.87 <sup>30</sup>
	5 dB $\leq$ RF attenuation $\leq 9$ dB	
	10 MHz $\leq f < 1$ GHz	< 1.5, typ. 1.20 <sup>30</sup>
	10 MHz $\leq f < 3.6$ GHz	< 1.5, typ. 1.31 <sup>30</sup>
	3.6 GHz $\leq f \leq 8$ GHz	< 2.0, typ. 1.51 <sup>30</sup>
	RF attenuation $\geq 10$ dB	
	10 MHz $\leq f < 1$ GHz	< 1.2, typ. 1.09 <sup>30</sup>
	1 GHz $\leq f < 3.6$ GHz	< 1.5, typ. 1.19 <sup>30</sup>
	3.6 GHz $\leq f \leq 8$ GHz	< 2.0, typ. 1.42 <sup>30</sup>
VSWR of R&S®FSW13	RF attenuation $\leq 4$ dB	
	10 MHz $\leq f \leq 13.6$ GHz	typ. 1.87 <sup>30</sup>
	5 dB $\leq$ RF attenuation $\leq 9$ dB	
	10 MHz $\leq f < 3.6$ GHz	< 1.5, typ. 1.25 <sup>30</sup>
	3.6 GHz $\leq f \leq 13.6$ GHz	< 2.0, typ. 1.29 <sup>30</sup>
	RF attenuation $\geq 10$ dB	
	10 MHz $\leq f < 1$ GHz	< 1.2, typ. 1.10 <sup>30</sup>
	1 GHz $\leq f < 3.6$ GHz	< 1.5, typ. 1.14 <sup>30</sup>
	3.6 GHz $\leq f \leq 13.6$ GHz	< 2.0, typ. 1.22 <sup>30</sup>
	VSWR of R&S®FSW26, R&S®FSW43, R&S®FSW50, R&S®FSW67, R&S®FSW85	RF attenuation $\leq 4$ dB
10 MHz $\leq f \leq 26.5$ GHz		typ. 1.87 <sup>30,31</sup>
26.5 GHz $< f \leq 40$ GHz		typ. 2.0 <sup>30</sup>
40 GHz $< f \leq 70$ GHz		2.0 (nom.)
70 GHz $< f \leq 85$ GHz/90 GHz <sup>24</sup>		2.4 (nom.)
5 dB $\leq$ RF attenuation $\leq 9$ dB		
10 MHz $\leq f \leq 3.5$ GHz		< 1.5, typ. 1.24 <sup>30,31</sup>
3.5 GHz $< f \leq 8$ GHz		< 1.8, typ. 1.26 <sup>30</sup>
8 GHz $< f \leq 18$ GHz		< 1.8, typ. 1.39 <sup>30</sup>
18 GHz $< f \leq 26.5$ GHz		< 2.0, typ. 1.43 <sup>30</sup>
26.5 GHz $< f \leq 40$ GHz		< 2.5, typ. 1.8 <sup>30</sup>
40 GHz $< f \leq 70$ GHz		2.0 (nom.)
70 GHz $< f \leq 85$ GHz/90 GHz <sup>24</sup>		2.4 (nom.)
RF attenuation $\geq 10$ dB		
10 MHz $\leq f \leq 3.5$ GHz		< 1.2, typ. 1.12 <sup>30,31</sup>
3.5 GHz $< f \leq 8$ GHz		< 1.5, typ. 1.19 <sup>30</sup>
8 GHz $< f \leq 18$ GHz		< 1.5, typ. 1.25 <sup>30</sup>
18 GHz $< f \leq 26.5$ GHz		< 2.0, typ. 1.37 <sup>30</sup>
26.5 GHz $< f \leq 40$ GHz		< 2.5, typ. 1.7 <sup>30</sup>
40 GHz $< f \leq 70$ GHz		2.0 (nom.)
70 GHz $< f \leq 85$ GHz/90 GHz <sup>24</sup>		2.4 (nom.)
R&S®FSW85, input coupling AC, RF attenuation $\geq 10$ dB		
50 MHz $\leq f \leq 3.5$ GHz		< 1.5, typ. 1.19 <sup>30</sup>
R&S®FSW85 RF input 2		
add 0.2 to the above values (nom.)		
Setting range of attenuator		0 dB to 79 dB, in 1 dB steps <sup>32, 33</sup>

<sup>30</sup> Typical VSWR performance: performance expected to be met in 95 % of the cases with a confidence level of 95 %, temperature +20 °C to +30 °C, input set to "DC coupling". These values are not warranted and are subject to modification if a significant change in the statistical behavior of production instruments is observed.

<sup>31</sup> R&S®FSW85: specification applies to input coupling DC.

<sup>32</sup> R&S®FSW8 to R&S®FSW67: Mechanical RF attenuator: 5 dB steps. Electronic IF attenuator: 1 dB steps.

<sup>33</sup> R&S®FSW85: Mechanical RF attenuator: 10 dB steps. Electronic IF attenuator: 1 dB steps.

<b>Probe power supply</b>		
Supply voltages		+15 V DC, -12.6 V DC and ground, max. 150 mA (nom.)

<b>Noise source control</b>		
Connector		BNC female
Output voltage		0 V/28 V, max. 100 mA, switchable (nom.)

<b>Power sensor / noise source control</b>		
Connector		7-pin LEMOSA female for R&S®FS-SNSxx smart noise sources and R&S®NRP-Zxx power sensors
Noise source control output voltage		0 V/28 V, switchable, max. 100 mA, (nom.)

<b>USB interface</b>		
		7 ports, type A plug, version 2.0
		1 port, type B plug, version 2.0

<b>AF output</b>		
Connector		3.5 mm mini-jack
Output impedance		10 Ω (nom.)
Open-circuit voltage		up to 1.5 V, adjustable
<b>External trigger/gate</b>		
Number of ports		1 × input, 2 × input/output, selectable
Connector		BNC female
Trigger input voltage		0.5 V to 3.5 V (nom.)
Trigger output voltage		TTL-compatible, 0 V/5 V (nom.)
Impedance		10 kΩ (nom.)

<b>Reference input 1 MHz to 50 MHz</b>		
Connector		BNC female
Impedance		50 Ω (nom.)
Input frequency range		1 MHz ≤ f <sub>m</sub> ≤ 20 MHz, in 1 Hz steps
Required level		> 0 dBm

<b>Reference input 100 MHz / 1 GHz</b>		
Connector		SMA female
Impedance		50 Ω (nom.)
Input frequency range		100 MHz, 1 GHz
Required level		0 dBm to 10 dBm

<b>Reference output 10 MHz</b>		
Connector		BNC female
Impedance		50 Ω (nom.)
Output frequency		10 MHz
Level		10 dBm (nom.)

<b>Reference output 1 MHz to 50 MHz</b>		
Connector		BNC female
Impedance		50 Ω (nom.)
Output frequency	internal reference	not active
	external reference	same as reference input signal
Level		same as reference input signal

<b>Reference output 100 MHz</b>		
Connector		SMA female
Impedance		50 Ω (nom.)
Output frequency		100 MHz
Level		6 dBm (nom.)

<b>Reference output 640 MHz</b>		
Connector		SMA female
Impedance		50 $\Omega$ (nom.)
Output frequency		640 MHz
Level		16 dBm (nom.)

<b>IF/video output</b>		
Connector		BNC female, 50 $\Omega$ (nom.)
<b>IF out</b>		
Bandwidth		equal to RBW setting
IF frequency		(RBW/2) to (240 MHz – RBW/2)
Output level	center frequency > 10 MHz, span = 0 Hz or I/Q analyzer on, signal at reference level and center frequency	0 dBm (nom.)
<b>Video out</b>		
Bandwidth		equal to VBW setting
Output scaling	log. display scale lin. display scale	logarithmic linear
Output level	center frequency > 10 MHz, span = 0 Hz, signal at reference level and center frequency	1 V at 50 $\Omega$ load (nom.)

<b>IF wide output (with R&amp;S®FSW-B160/B320/-B512/-B512R option only)</b>		
Connector	R&S®FSW-B160 or R&S®FSW-B320 R&S®FSW-B512	BNC female, 50 $\Omega$ (nom.) SMA female, 50 $\Omega$ (nom.)
IF frequency	center frequency $\geq$ 200 MHz	50 MHz to 550 MHz (nom.)
Max. bandwidth (6 dB)	YIG preselector off	500 MHz
Output level	RF attenuation = auto, reference level $\geq$ –15 dBm, signal level = reference level	–20 dBm (nom.)
<b>Aux port</b>		
Connector		9-pin D-Sub male
Output		TTL-compatible, 0 V/5 V (nom.), max. 15 mA (nom.)
Input		TTL-compatible, max. 5 V (nom.)

<b>IF output 2 GHz (R&amp;S®FSW26, R&amp;S®FSW43, R&amp;S®FSW50, R&amp;S®FSW67 and R&amp;S®FSW85 only, not available with R&amp;S®FSW-B1200/-B2001/-B800R option)</b>		
Connector		SMA female, 50 $\Omega$ (nom.)
RF frequency range	span = 0 Hz	8 GHz to the maximum frequency of the instrument model
IF frequency	center	2 GHz

<b>IEC/IEEE bus control</b>		
Command set		interface in line with IEC 625-2 (IEEE 488.2)
Connector		SCPI 1997.0
Interface functions		24-pin Amphenol female SH1, AH1, T6, L4, SR1, RL1, PP1, DC1, DT1, C0

<b>LAN interface</b>		
Connector		10/100/1000BASE-T RJ-45

<b>External monitor</b>		
Connector		DVI-D, DisplayPort Rev 1.1

<b>Synchronization input</b>		
Connector		HDMI™

<b>Synchronization output</b>		
Connector		HDMI™



## General data

<b>Display</b>		30.7 cm (12.1") WXGA color touchscreen
Resolution		1280 × 800 pixel (WXGA resolution)
Pixel failure rate		$< 1 \times 10^{-5}$

<b>Data storage</b>		
Internal	standard	solid state disk $\geq 32$ Gbyte
External		supports USB 2.0 compatible memory devices

<b>Temperature</b>		
Temperature	operating temperature range	+5 °C to +50 °C <sup>34</sup>
	permissible temperature range	0 °C to +55 °C <sup>34</sup>
	storage temperature range	-40 °C to +70 °C
Climatic loading		+40 °C at 90 % rel. humidity, in line with EN 60068-2-30, without condensation

<b>Altitude</b>		
Max. operating altitude	above sea level	4600 m (approx. 15100 feet)

<b>Mechanical resistance</b>		
Vibration	sinusoidal	5 Hz to 55 Hz displacement: 0.15 mm constant amplitude (1.8 g at 55 Hz); 55 Hz to 150 Hz acceleration: 0.5 g constant in line with EN 60068-2-6
	random	10 Hz to 300 Hz, acceleration 1.2 g (RMS), in line with EN 60068-2-64
Shock		40 g shock spectrum, in line with MIL-STD-810E method no. 516.4, procedure I, MIL-PRF-28800F, class 3

<b>EMC</b>		in line with EMC Directive 2014/30/EU including: IEC/EN 61326-1 <sup>35, 36</sup> IEC/EN 61326-2-1 CISPR 11/EN 55011 <sup>35</sup> IEC/EN 61000-3-2 IEC/EN 61000-3-3
------------	--	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

<b>Recommended calibration interval</b>		1 year
-----------------------------------------	--	--------

<b>Warranty</b>	base unit	3 years
	accessories	1 year

<sup>34</sup> With built-in R&S®FSW-B512R option, the upper operating and permissible temperature with active real-time analysis is limited to +45 °C.

With built-in R&S®FSW-B800R option, the upper operating and permissible temperature with active real-time analysis is limited to +40 °C.

<sup>35</sup> Emission limits for class A equipment apply.

<sup>36</sup> Immunity test requirement for industrial environment (EN 61326 table 2).

<b>Power supply</b>		
AC input voltage range		100 V to 240 V
AC supply frequency		50 Hz to 60 Hz/400 Hz
Max. input current		7.3 A (100 V) to 4.6 A (240 V)
Power consumption	R&S®FSW8	150 W without options, 250 W with all options (meas.) <sup>37</sup>
	R&S®FSW13, R&S®FSW26	175 W without options, 275 W with all options (meas.) <sup>37</sup>
	R&S®FSW43, R&S®FSW50	200 W without options, 300 W with all options (meas.) <sup>37</sup>
	R&S®FSW67	220 W without options, 320 W with all options (meas.) <sup>37</sup>
	R&S®FSW85	230 W without options, 330 W with all options (meas.) <sup>37</sup>
Safety		in line with IEC 61010-1, EN 61010-1, UL 61010-1, CAN/CSA-C22.2 No. 61010-1
Test mark		VDE-GS, cCSA <sub>Us</sub>

<b>Dimensions and weight</b>		
Dimensions (nom.) (W × H × D, including front handles and rear feet)	R&S®FSW8 to R&S®FSW67	462 mm × 240 mm × 504 mm (18.15 in × 9.44 in × 19.81 in)
	R&S®FSW85	462 mm × 240 mm × 610 mm (18.15 in × 9.44 in × 24.01 in)
Net weight without options (nom.)	R&S®FSW8	18.6 kg (41.01 lb)
	R&S®FSW13	20.2 kg (44.53 lb)
	R&S®FSW26	20.2 kg (44.53 lb)
	R&S®FSW43, R&S®FSW50	20.9 kg (46.07 lb)
	R&S®FSW67	23.6 kg (52.03 lb)
	R&S®FSW85	26.6 kg (58.64 lb)

<sup>37</sup> All options except R&S®FSW-B512R/-B1200/-B2001/-B800R.  
 For R&S®FSW-B512R add 130 W to the power consumption.  
 For R&S®FSW-B1200/-B2001/-B800R add 200 W to the power consumption.

## Options

### R&S®FSW-B10 external generator control

Interface		
IEC/IEEE bus control		24-pin Amphenol female
Aux control		9-pin D-Sub female

<b>Supported signal generators</b>		R&S®SGS100A, R&S®SGT100A, R&S®SMA100A, R&S®SMA100B, R&S®SMB100A, R&S®SMB100B, R&S®SMBV100A, R&S®SMBV100B, R&S®SMC100A, R&S®SME, R&S®SMF100A, R&S®SMG, R&S®SMGL, R&S®SMGU, R&S®SMH, R&S®SMHU, R&S®SMIQ, R&S®SMJ100A, R&S®SML, R&S®SMP, R&S®SMR, R&S®SMT, R&S®SMU200A, R&S®SMV03, R&S®SMW200A, R&S®SMX, R&S®SMY
------------------------------------	--	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

### R&S®FSW-B13 highpass filters

Frequency		
Frequency range	filter 1	1 GHz to 1.75 GHz
	filter 2	1.75 GHz to 3 GHz

Stopband attenuation		
500 MHz to 875 MHz	filter 1	> 20 dB (nom.)
875 MHz to 1.5 GHz	filter 2	> 20 dB (nom.)

Other specifications		
Level measurement uncertainty		see base unit specification
Displayed average noise level		
Intermodulation		
Measurement uncertainty		

### R&S®FSW-B17 digital baseband interface

I/Q data IN		
Interface		LVDS
	connector	26-pin female MDR (Mini D Ribbon)
Transfer protocol		R&S®Digital I/Q Interface <sup>38</sup>
User data	sample rate	100 sample/s to 200 Msample/s (nom.)
	resolution	18 bit for I and 18 bit for Q
	general purpose signals	2 bit

I/Q data OUT		
Interface		LVDS
	connector	26-pin female MDR (Mini D Ribbon)
Transfer protocol		R&S®Digital I/Q Interface <sup>38</sup>
User data	sample rate	100 sample/s to 200 Msample/s (nom.)
	resolution	18 bit for I and 18 bit for Q
	standard	10 MHz
Max. I/Q bandwidth	with R&S®FSW-B28 option	28 MHz
	with R&S®FSW-B40 option	40 MHz
	with R&S®FSW-B80 option	80 MHz
	with R&S®FSW-B160/-B320/-B512/ -B512R/-B1200/-B2001/-B800R option	160 MHz

<sup>38</sup> R&S®Digital I/Q Interface is a Rohde & Schwarz company standard for the transmission of digital I/Q data.

It is supported by a wide range of instruments (signal generators, signal analyzers and communications testers).

## R&S®FSW-B517 DIG IQ 40G streaming out interface

Interface	direction	I/Q data OUT
	connector	QSFP+
	transfer data rate	40 Gbps
Output channel		16 bit, 600 Msample/s
User data	sample rate	100.1 Msample/s to 600 Msample/s (nom.)
	resolution	16 bit for I and 16 bit for Q
Min. I/Q bandwidth		80 MHz
Max. I/Q bandwidth	with R&S®FSW-B512/-B512R option	512 MHz
	with R&S®FSW-B1200 option	512 MHz
	with R&S®FSW-B2001/-B800R option	512 MHz

## R&S®FSW-B21 LO/IF connections for external mixers (not available for R&S®FSW8, R&S®FSW13)

<b>LO signal</b>		
Frequency range		7.65 GHz to 17.45 GHz
Level	+20 °C to +30 °C	+15.5 dBm ± 1 dB
	+5 °C to +40 °C	+15.5 dBm ± 3 dB

<b>IF input</b>		
IF frequency	set signal analysis bandwidth	
	≤ 80 MHz, bandwidth-dependent	1310 MHz to 1330 MHz
	80 MHz to 160 MHz/320 MHz with R&S®FSW-B160/-B320	1530 MHz
	80 MHz to 512 MHz with R&S®FSW-B512/-B512R/-B1200/-B2001/-B800R	1580 MHz
	> 512 MHz with R&S®FSW-B1200/-B2001/-B800R	3290 MHz
	> 80 MHz with R&S®FSW-B2000	2000 MHz
	> 80 MHz with R&S®FSW-B5000	
	analysis bandwidth ≤ 4.4 GHz	2800 MHz
	analysis bandwidth > 4.4 GHz	3500 MHz
Full-scale level	compression < 1 dB	
	2-port mixer (LO output/IF input, front panel) <sup>39</sup>	-20 dBm (nom.)
	3-port mixer (IF input, front panel)	-20 dBm (nom.)
Level uncertainty at IF frequency	IF input level = reference level = -25 dBm, RBW = 30 kHz, mixer conversion loss set to 0 dB, 2-port mixer, LO output/IF input connector (front panel) <sup>39</sup>	
	+20 °C to +30 °C	< 1 dB
	+5 °C to +40 °C	< 3 dB
	IF input level = reference level = -25 dBm, RBW = 30 kHz, mixer conversion loss set to 0 dB, 3-port mixer, IF input connector (front panel)	
	+20 °C to +30 °C	< 1 dB
	+5 °C to +40 °C	< 3 dB

<b>Inputs and outputs</b>		
LO output/IF input		SMA female, 50 Ω
IF input		SMA female, 50 Ω

<sup>39</sup> 2-port mixers are not supported by the R&S®FSW-B800R/-B1200/-B2000/-B2001/-B5000 options.

## R&S®FSW-B24 RF preamplifier

Frequency		
Frequency range	R&S®FSW8	100 kHz to 8 GHz
	R&S®FSW13	100 kHz to 13.6 GHz
	R&S®FSW26	100 kHz to 26.5 GHz
	R&S®FSW43	100 kHz to 43.5 GHz
	R&S®FSW50	100 kHz to 50 GHz
	R&S®FSW67	100 kHz to 67 GHz

Setting range		
RF preamplifier gain	R&S®FSW8, R&S®FSW13	15 dB/30 dB (nom.) (selectable)
	R&S®FSW26, R&S®FSW43, R&S®FSW50, R&S®FSW67	30 dB (nom.)

Other specifications		
Level measurement uncertainty		see base unit specification
Displayed average noise level		
Intermodulation		
Measurement uncertainty		

## R&S®FSW-B25 electronic attenuator

Frequency		
Frequency range	R&S®FSW8	10 MHz to 8 GHz
	R&S®FSW13, R&S®FSW26	10 MHz to 13.6 GHz

Setting range		0 dB to 30 dB, in 1 dB steps <sup>40</sup>
---------------	--	--------------------------------------------

Level measurement uncertainty		see base unit specification
-------------------------------	--	-----------------------------

Displayed average noise level	electronic attenuator on	specification of base unit degrades by 3 dB + 0.25 dB × f / 1 GHz (nom.)
-------------------------------	--------------------------	-----------------------------------------------------------------------------

Intermodulation		
Third-order intercept point (TOI)	electronic attenuator off or electronic attenuator on and RF attenuation = 0 dB	see base unit specification
	electronic attenuator on, RF attenuation = 30 dB	
	10 MHz to 500 MHz	30 dBm (nom.)
	500 MHz to 13.6 GHz	40 dBm (nom.)

<sup>40</sup> Electronic RF attenuator: 5 dB steps.  
Electronic IF attenuator: 1 dB steps.

## R&S®FSW-B71 analog baseband inputs, R&S®FSW-B71E 80 MHz analysis bandwidth for analog baseband inputs

Frequency		
Frequency range (equalized)	R&S®FSW-B71	
	I only, Q only	DC to 40 MHz
	I + jQ	-40 MHz to +40 MHz
	R&S®FSW-B71E	
	I only, Q only	DC to 80 MHz
	I + jQ	-80 MHz to +80 MHz

Spectral purity		
Phase noise	offset 1 kHz	-134 dBc (1 Hz) (nom.)
	offset 10 kHz	-138 dBc (1 Hz) (nom.)
	offset ≥ 100 kHz	-144 dBc (1 Hz) (nom.)

Inputs		
Connectors	I and Q	BNC female, 50 Ω (nom.)
	$\bar{I}$ and $\bar{Q}$ <sup>41</sup>	BNC female, 50 Ω (nom.)
Maximum safe input voltage	any input, sum of DC + AC	±4 V
Input voltage range (full scale)	peak voltage	±2 V, ±1 V, ±0.5 V, ±0.25 V
Max. common mode input range		-3 V to +3 V
Input impedance	single-ended	50 Ω (nom.)
	differential	100 Ω (nom.)
	common mode at DC	20 kΩ (nom.)
Input return loss	0 Hz to 40 MHz	-35 dB (nom.)
	40 MHz to 80 MHz (R&S®FSW-B71E only)	-30 dB (nom.)

Amplitude		
Absolute amplitude accuracy	$f_{\text{input}} = 1 \text{ MHz}$ , input voltage = full scale - 6 dB	±0.15 dB
Amplitude linearity	0 dB to -80 dB relative to full scale	±0.1 dB (nom.)
Frequency response		
Amplitude	relative to 1 MHz	
	0 Hz to 40 MHz	±0.15 dB
	40 MHz to 80 MHz (R&S®FSW-B71E only)	±0.25 dB
Deviation from linear phase	0 Hz to 40 MHz	±1° (nom.)
	40 MHz to 80 MHz (R&S®FSW-B71E only)	±2° (nom.)
Channel match (I/Q imbalance)		
Amplitude match accuracy	0 Hz to 20 MHz	±0.06 dB (2σ)
	20 MHz to 40 MHz	±0.1 dB (2σ)
	40 MHz to 80 MHz (R&S®FSW-B71E only)	±0.15 dB (2σ)
Phase match accuracy	0 Hz to 20 MHz	±0.3° (nom.)
	20 MHz to 40 MHz	±0.6° (nom.)
	40 MHz to 80 MHz (R&S®FSW-B71E only)	±1° (nom.)

Dynamic range		
Crosstalk		-80 dB (nom.)
Signal-to-noise ratio	any input range, relative to full scale	145 dBc (1 Hz) (nom.)
Displayed average noise level (RMS)	2 MHz to 80 MHz range	
	±2 V peak	-130 dBm (1 Hz) (72 nV ( $\sqrt{1 \text{ Hz}}$ )) (nom.)
	±1 V peak	-136 dBm (1 Hz) (36 nV ( $\sqrt{1 \text{ Hz}}$ )) (nom.)
	±0.5 V peak	-142 dBm (1 Hz) (18 nV ( $\sqrt{1 \text{ Hz}}$ )) (nom.)
	±0.25 V peak	-148 dBm (1 Hz) (9 nV ( $\sqrt{1 \text{ Hz}}$ )) (nom.)

<sup>41</sup> Not available for the R&S®FSW85.

Residual DC (I/Q offset)	relative to full scale	-54 dB (nom.)
Residual response	range $\pm 0.25$ V peak	-90 dBm (nom.)
Spurious response	with full scale input signal	
	0 Hz to 40 MHz	-75 dBc (nom.)
	40 MHz to 80 MHz (R&S®FSW-B71E only)	-70 dBc (nom.)
Third-order intermodulation distortion	two CW signals, voltage = full scale - 6 dB (each signal)	
	0 Hz to 40 MHz	-80 dBc (nom.)
	40 MHz to 80 MHz (R&S®FSW-B71E only)	
	differential	-80 dBc (nom.)
	single-ended	-74 dBc (nom.)

**Probes**

Probes supported on connectors I and Q	active single-ended probes	R&S®RT-ZS10E
		R&S®RT-ZS10
		R&S®RT-ZS20
		R&S®RT-ZS30
		R&S®RT-ZS60
	active differential probes	R&S®RT-ZD20
		R&S®RT-ZD30
R&S®RT-ZD40		
<b>RF measurements using probes <sup>42</sup></b>		
Supported connector	input source RF set to baseband input I	I
Maximum input frequency		5 GHz <sup>43</sup>
Frequency response	see probe specification for frequency response of probe	add the probe frequency response to the R&S®FSW frequency response specified in section "Total measurement uncertainty"

<sup>42</sup> Feature not available for R&S®FSW67 and R&S®FSW85.

<sup>43</sup> Maximum frequency supported by the connector. To identify the maximum achievable input frequency when using a probe, the probe specification must be taken into account.

## R&S®FSW-B2000 2 GHz analysis bandwidth (option available for all models except R&S®FSW8, R&S®FSW13) <sup>44</sup>

The specifications in this section apply to I/Q data recorded using the R&S®FSW-B2000 option. "B2000" must be configured as data source in the INPUT menu. When using other input settings for I/Q data recording, i.e. in relation with the R&S®FSW-B28/-B40/-B80/-B160/-B320/-B512/-B512R options, see section "I/Q data" in the base unit specification. The R&S®FSW-B2000 option uses an oscilloscope as external digitizer. An R&S®RTO1044, R&S®RTO2044 or R&S®RTO 2064 with R&S®RTO-B4 option is needed to obtain the specified performance. For ordering information, see "Oscilloscopes supported by R&S®FSW-B2000/-B2071 option" and "Oscilloscopes supported by R&S®FSW-B2000/-B2071 and R&S®FSW-B5000 option".

Frequency range	setting range of center frequency	
	standard, dependent on instrument model	5.5 GHz to 26/43/50/67/86 GHz
	R&S®FSW85 with R&S®FSW-B90G option	5.5 GHz to 90 GHz
Record length <sup>45</sup>	2 GHz analysis bandwidth, sampling rate 2.5 GHz, R&S®RTO-1044 with R&S®RTO-B104 option	
		max. 200 Msample I and Q <sup>46</sup>
	2 GHz analysis bandwidth, sampling rate 2.5 GHz, R&S®RTO-2044/2064 with R&S®RTO-B110 option	
		max. 500 Msample I and Q <sup>46</sup>
Sampling rate	setting range	10 kHz to 10 GHz
	default for 2 GHz analysis bandwidth	2.5 GHz
Signal analysis bandwidth (equalized)	dependent on sampling rate, YIG preselector off	8 kHz to 2 GHz
Amplitude flatness	RF attenuation = 10/20/30/40 dB, RF preamplifier off, electronic attenuator off, YIG preselector off, power splitter mode off <sup>47</sup> , +20 °C to +30 °C	
	analysis bandwidth ≤ 2 GHz	
	5.5 GHz ≤ f <sub>center</sub> < 8 GHz	±1.5 dB
	8 GHz ≤ f <sub>center</sub> < 22 GHz	±1.2 dB
	22 GHz ≤ f <sub>center</sub> ≤ 26.5 GHz	±1.4 dB
	26.5 GHz < f <sub>center</sub> ≤ 43.5 GHz	±1.6 dB
	43.5 GHz < f <sub>center</sub> ≤ 50.0 GHz	±1.7 dB
	50.0 GHz < f <sub>center</sub> ≤ 67.0 GHz <sup>48</sup>	±2.0 dB
67 GHz < f <sub>center</sub> ≤ 85 GHz	±2.5 dB	
Deviation from linear phase	RF attenuation = 10/20/30/40 dB, RF preamplifier off, electronic attenuator off, YIG preselector off, power splitter mode off <sup>47</sup> , +20 °C to +30 °C	
	analysis bandwidth ≤ 500 MHz	
	5.5 GHz ≤ f <sub>center</sub> < 13 GHz	±4° (nom.)
	13 GHz ≤ f <sub>center</sub> ≤ 37 GHz	±2° (nom.)
	37 GHz < f <sub>center</sub> ≤ 40 GHz	±4° (nom.)
	40.0 GHz < f <sub>center</sub> ≤ 50.0 GHz	±6° (nom.)
	50.0 GHz < f <sub>center</sub> ≤ 67.0 GHz	±4° (nom.)
	67 GHz < f <sub>center</sub> ≤ 85 GHz	±6° (nom.)
	analysis bandwidth ≤ 1 GHz	
	5.5 GHz ≤ f <sub>center</sub> < 13 GHz	±6° (nom.)
	13 GHz ≤ f <sub>center</sub> ≤ 37 GHz	±4° (nom.)
	37 GHz < f <sub>center</sub> ≤ 40 GHz	±6° (nom.)
	40.0 GHz < f <sub>center</sub> ≤ 50.0 GHz	±8° (nom.)
	50.0 GHz < f <sub>center</sub> ≤ 67.0 GHz	±6° (nom.)
67 GHz < f <sub>center</sub> ≤ 85 GHz	±8° (nom.)	

<sup>44</sup> The R&S®FSW-B2000 option is not available in combination with the R&S®FSW-B1200/-B2001/-B800R option.

<sup>45</sup> The maximum record length with the R&S®FSW-B2000 option depends on the R&S®RTO memory configuration.

The following equation indicates the relation between record length, R&S®RTO memory size and set R&S®FSW sampling rate:

Record length (rounded to Msample) = (R&S®RTO memory size per channel in Msample) × R&S®FSW sample rate/R&S®RTO sample rate.

This equation is valid for oscilloscopes equipped with R&S®RTO-B104 or R&S®RTO-B110 option. For other memory option configurations divide the values / 2 when using external trigger or power splitter mode on. The sample rate for the R&S®RTO can be set to 10 GHz (default) or 20 GHz.

At 2 GHz analysis bandwidth the R&S®FSW default sample rate is 2.5 GHz.

<sup>46</sup> Rounded to Msample.

<sup>47</sup> For power splitter mode on add ±0.3 dB to the amplitude flatness specification and ±2° to the deviation from linear phase values.

<sup>48</sup> f<sub>center</sub> ≤ 66.5 GHz for analysis bandwidth 2 GHz with R&S®FSW67.



Deviation from linear phase (continued)	analysis bandwidth $\leq 2$ GHz	
	R&S®FSW26	
	$f_{\text{center}} \geq 8$ GHz	$\pm 8^\circ$ (nom.)
	R&S®FSW43 to R&S®FSW85	
	$5.5 \text{ GHz} \leq f_{\text{center}} < 13 \text{ GHz}$	$\pm 8^\circ$ (nom.)
	$13 \text{ GHz} \leq f_{\text{center}} \leq 37 \text{ GHz}$	$\pm 6^\circ$ (nom.)
	$37 \text{ GHz} < f_{\text{center}} \leq 40 \text{ GHz}$	$\pm 8^\circ$ (nom.)
	$40.0 \text{ GHz} < f_{\text{center}} \leq 50.0 \text{ GHz}$	$\pm 10^\circ$ (nom.)
	$50.0 \text{ GHz} < f_{\text{center}} \leq 67.0 \text{ GHz}$ <sup>48</sup>	$\pm 8^\circ$ (nom.)
	$67 \text{ GHz} < f_{\text{center}} \leq 85 \text{ GHz}$	$\pm 10^\circ$ (nom.)
Level measurement uncertainty at center frequency	add 1 dB (nom.) to the values in "Total measurement uncertainty – YIG preselector off"	

## R&S®FSW-B5000 5 GHz analysis bandwidth for R&S®FSW43 and R&S®FSW85 <sup>49</sup>

The specifications in this section apply to I/Q data recorded using the R&S®FSW-B5000 option. "B5000" must be configured as data source in the INPUT menu. When using other input settings for I/Q data recording, i.e. in relation with the R&S®FSW-B28/-B40/-B80/-B160/-B320/-B512/-B512R/-B1200/-B2001 options, see section "I/Q data" in the base unit specification. The R&S®FSW-B5000 option uses an oscilloscope as external digitizer. An R&S®RTO 2064 with R&S®RTO-B4 option is needed to obtain the specified performance. For ordering information, see "Oscilloscopes supported by R&S®FSW-B2000/-B2071 and R&S®FSW-B5000 option".

Frequency range	setting range of center frequency	
	R&S®FSW43	
	RF preamplifier off	9.5 GHz to 43 GHz
	RF preamplifier on	9.5 GHz to 41 GHz
	R&S®FSW85	
	without R&S®FSW-B90G option	9.5 GHz to 85 GHz
	with R&S®FSW-B90G option	9.5 GHz to 90 GHz
Record length <sup>50</sup>	R&S®RTO 2064 with R&S®RTO-B110 option	
	2 GHz analysis bandwidth, sampling rate 2.5 GHz	max. 250 Msample I and Q <sup>46</sup>
	5 GHz analysis bandwidth, sampling rate 6.25 GHz	max. 625 Msample I and Q <sup>46</sup>
Sampling rate	setting range	
	default for analysis bandwidth 2 GHz	2.5 GHz
	default for analysis bandwidth 5 GHz	6.25 GHz
Signal analysis bandwidth (equalized)	dependent on sampling rate, YIG preselector off	8 kHz to 5 GHz
Amplitude flatness	RF attenuation = 10/20/30/40 dB, RF preamplifier off, electronic attenuator off, YIG preselector off, power splitter mode off <sup>51</sup> , +20 °C to +30 °C	
	analysis bandwidth ≤ 5 GHz	
	9.5 GHz ≤ $f_{center}$ < 22 GHz	±1.2 dB
	22 GHz ≤ $f_{center}$ ≤ 26.5 GHz	±1.4 dB
	26.5 GHz < $f_{center}$ ≤ 43.5 GHz	±1.6 dB
	43.5 GHz < $f_{center}$ ≤ 50.0 GHz	±1.7 dB
	50.0 GHz < $f_{center}$ ≤ 67.0 GHz	±2.0 dB
67 GHz < $f_{center}$ ≤ 85 GHz/87.5 GHz <sup>52</sup>	±2.5 dB	
Deviation from linear phase	RF attenuation = 10/20/30/40 dB, RF preamplifier off, electronic attenuator off, YIG preselector off, power splitter mode off <sup>51</sup> , +20 °C to +30 °C	
	analysis bandwidth ≤ 500 MHz	
	9.5 GHz ≤ $f_{center}$ < 13 GHz	±4° (nom.)
	13 GHz ≤ $f_{center}$ ≤ 37 GHz	±2° (nom.)
	37 GHz < $f_{center}$ ≤ 40 GHz	±4° (nom.)
	40.0 GHz < $f_{center}$ ≤ 50.0 GHz	±6° (nom.)
	50.0 GHz < $f_{center}$ ≤ 67.0 GHz	±4° (nom.)
	67 GHz < $f_{center}$ ≤ 83.0 GHz	±6° (nom.)
	analysis bandwidth ≤ 1 GHz	
	9.5 GHz ≤ $f_{center}$ < 13 GHz	±6° (nom.)
	13 GHz ≤ $f_{center}$ ≤ 37 GHz	±4° (nom.)
	37 GHz < $f_{center}$ ≤ 40 GHz	±6° (nom.)
	40.0 GHz < $f_{center}$ ≤ 50.0 GHz	±8° (nom.)
	50.0 GHz < $f_{center}$ ≤ 67.0 GHz	±6° (nom.)
67 GHz < $f_{center}$ ≤ 83.0 GHz	±8° (nom.)	

<sup>49</sup> The R&S®FSW-B5000 option is not available in combination with the R&S®FSW-B2000 option.

<sup>50</sup> The maximum record length with the R&S®FSW-B5000 option depends on the R&S®RTO memory configuration.

The following equation indicates the relation between record length, R&S®RTO memory size and set R&S®FSW sampling rate:

Record length (rounded to Msample) = (R&S®RTO memory size per channel in Msample) \* R&S®FSW sample rate/R&S®RTO sample rate.

This equation is valid for oscilloscopes equipped with R&S®RTO-B104 or R&S®RTO-B110 option. For other memory option configurations divide the values / 2 when using external trigger or power splitter mode on.

The sample rate for the R&S®RTO is 20 GHz. At 5 GHz analysis bandwidth the R&S®FSW default sample rate is 6.25 GHz.

<sup>51</sup> For power splitter mode on add ±0.3 dB to the amplitude flatness specification and ±5° to the deviation from linear phase values.

<sup>52</sup>  $f_{center}$  > 85 GHz requires R&S®FSW-B90G option.

Deviation from linear phase (continued)	analysis bandwidth $\leq$ 2 GHz	
	9.5 GHz $\leq$ $f_{\text{center}} <$ 13 GHz	$\pm 8^\circ$ (nom.)
	13 GHz $\leq$ $f_{\text{center}} \leq$ 37 GHz	$\pm 6^\circ$ (nom.)
	37 GHz $<$ $f_{\text{center}} \leq$ 40 GHz	$\pm 8^\circ$ (nom.)
	40.0 GHz $<$ $f_{\text{center}} \leq$ 50.0 GHz	$\pm 10^\circ$ (nom.)
	50.0 GHz $<$ $f_{\text{center}} \leq$ 67.0 GHz	$\pm 8^\circ$ (nom.)
	67 GHz $<$ $f_{\text{center}} \leq$ 83.0 GHz	$\pm 10^\circ$ (nom.)
	analysis bandwidth $\leq$ 4.4 GHz	
	9.5 GHz $\leq$ $f_{\text{center}} <$ 13 GHz	$\pm 10^\circ$ (nom.)
	13 GHz $\leq$ $f_{\text{center}} \leq$ 37 GHz	$\pm 8^\circ$ (nom.)
	37 GHz $<$ $f_{\text{center}} \leq$ 40 GHz	$\pm 10^\circ$ (nom.)
	40.0 GHz $<$ $f_{\text{center}} \leq$ 50.0 GHz	$\pm 12^\circ$ (nom.)
	50.0 GHz $<$ $f_{\text{center}} \leq$ 67.0 GHz	$\pm 10^\circ$ (nom.)
	67 GHz $<$ $f_{\text{center}} \leq$ 82.0 GHz <sup>53</sup>	$\pm 12^\circ$ (nom.)
	analysis bandwidth $\leq$ 5 GHz	
9.5 GHz $\leq$ $f_{\text{center}} \leq$ 80.0 GHz <sup>53</sup>	add $\pm 3^\circ$ (nom.) to the values for analysis bandwidth $\leq$ 4.4 GHz	
Level measurement uncertainty at center frequency	add 1 dB (nom.) to the values in "Total measurement uncertainty – YIG preselector off"	

## R&S®FSW-B2071 oscilloscope baseband inputs (available for all R&S®FSW models)

The specifications in this section apply to I/Q data recorded using the R&S®FSW-B2071 option. An R&S®RTO1044, R&S®RTO2044 or R&S®RTO 2064 with R&S®RTO-B4 option is needed to obtain the specified performance. For ordering information, see "Oscilloscopes supported by R&S®FSW-B2000/-B2071 option" and "Oscilloscopes supported by R&S®FSW-B2000/-B2071 and R&S®FSW-B5000 option"

Frequency range	dependent on R&S®RTO model	
	R&S®RTO 1044/2044	
	I + jQ	–4 GHz to +4 GHz
	I only	DC to 4 GHz
	R&S®RTO 2064	
	I + jQ	–6 GHz to +6 GHz
Record length <sup>54</sup>	sampling rate 2.5 GHz, R&S®RTO 1044 with R&S®RTO-B104 option	
	I + jQ, differential	max. 100 Msample <sup>55</sup>
	I + jQ, single ended	max. 200 Msample <sup>55</sup>
	I only	max. 200 Msample <sup>55</sup>
	sampling rate 2.5 GHz, R&S®RTO 2044/2064 with R&S®RTO-B110 option	
	I + jQ, differential	max. 250 Msample <sup>55</sup>
Sampling rate	setting range	
	default for 2 GHz analysis bandwidth	2.5 GHz
	10 kHz to 20 GHz	
Signal analysis bandwidth	dependent on R&S®RTO model and IQ mode	
	R&S®RTO 1044/2044	8 kHz to 8 GHz
	R&S®RTO 2064	8 kHz to 12 GHz
Amplitude	see datasheet R&S®RTO	
Dynamic range	see datasheet R&S®RTO	

<sup>53</sup> Phase alignment is performed up to  $f = 83$  GHz.

<sup>54</sup> The maximum record length with the R&S®FSW-B2071 option depends on the R&S®RTO memory configuration and the number of active R&S®RTO channels.

The following equation indicates the relation between record length, R&S®RTO memory size and set R&S®FSW sampling rate for 1 active channel:

Record length (rounded to Msample) = (R&S®RTO memory size per channel in Msample)  $\times$  R&S®FSW sample rate/R&S®RTO sample rate.

Divide the value by half with R&S®RTO-B104 or R&S®RTO-B110 for differential mode. For other memory option configurations divide the value by half when using differential mode or I/Q single ended mode.

The sample rate for the R&S®RTO will be set to 10 GHz in differential mode and 20 GHz for all other modes.

At 2 GHz analysis bandwidth the R&S®FSW default sample rate is 2.5 GHz.

<sup>55</sup> Rounded to Msample.

## Ordering information

Designation	Type	Order No.
Signal and Spectrum Analyzer, 2 Hz to 8 GHz	R&S®FSW8	1331.5003.08
Signal and Spectrum Analyzer, 2 Hz to 13.6 GHz	R&S®FSW13	1331.5003.13
Signal and Spectrum Analyzer, 2 Hz to 26.5 GHz	R&S®FSW26	1331.5003.26
Signal and Spectrum Analyzer, 2 Hz to 43.5 GHz	R&S®FSW43	1331.5003.43
Signal and Spectrum Analyzer, 2 Hz to 50 GHz	R&S®FSW50	1331.5003.50
Signal and Spectrum Analyzer, 2 Hz to 67 GHz	R&S®FSW67	1331.5003.67
Signal and Spectrum Analyzer, 2 Hz to 85 GHz <sup>56</sup>	R&S®FSW85	1331.5003.85
<b>Accessories supplied</b>		
Power cable, quick start guide		
R&S®FSW26: adapter 3.5 mm (APC3.5-compatible) female/female		
R&S®FSW43: adapter 2.92 mm female/female		
R&S®FSW50 and R&S®FSW67: adapter 1.85 mm female/female		
R&S®FSW85: adapter 1.0 mm female/female, torque wrench for 1.0 mm connectors with 0.23 Nm coupling torque adapter 1.85 mm female/female		

### Options for R&S®FSW with order no. 1331.5003.xx

Designation	Type	Order No.	Retro-fittable	Remarks
OCXO Precision Frequency Reference	R&S®FSW-B4	1313.0703.02	yes	user-retrofittable
Resolution Bandwidth up to 40 MHz	R&S®FSW-B8E	1338.6911.02	yes	for R&S®FSW8/13/26/43/50/67/85; the signal analysis bandwidth is defined by the R&S®FSW-B28/-B40/-B80/-B160/ -B320/-B512/-B512R/-B1200/-B2001/ -B5000/-B800R options, not by the R&S®FSW-B8E option; user-retrofittable <sup>57</sup>
Resolution Bandwidth up to 80 MHz	R&S®FSW-B8	1313.2464.26	yes	for R&S®FSW8/13/26; the signal analysis bandwidth is defined by the R&S®FSW-B28/-B40/-B80/-B160/ -B320/-B512/-B512R/-B1200/-B2001/ -B800R/-B5000 options, not by the R&S®FSW-B8 option; contact service center
Resolution Bandwidth up to 80 MHz	R&S®FSW-B8	1313.2464.02	yes	for R&S®FSW43/50/67/85; the signal analysis bandwidth is defined by the R&S®FSW-B28/-B40/-B80/-B160/ -B320/-B512/-B512R/-B1200/-B2001/ -B5000/-B800R options, not by the R&S®FSW-B8 option; contact service center; export license required
External Generator Control	R&S®FSW-B10	1313.1622.02	yes	contact service center
Highpass Filter for Harmonic Measurements	R&S®FSW-B13	1313.0761.02	yes	user-retrofittable
Digital Baseband Interface	R&S®FSW-B17	1313.0784.02	yes	user-retrofittable
Spare Solid State Drive (removable hard drive)	R&S®FSW-B18	1313.0790.10	yes	user-retrofittable
LO/IF Connections for external mixers	R&S®FSW-B21	1313.1100.28	yes	for R&S®FSW26/43/50/67; contact service center
LO/IF Connections for external mixers	R&S®FSW-B21	1313.1100.86	yes	for R&S®FSW85; contact service center
RF Preamp, 100 kHz to 13.6 GHz	R&S®FSW-B24	1313.0832.13	yes	for R&S®FSW8/13; contact service center
RF Preamp, 100 kHz to 26.5 GHz	R&S®FSW-B24	1313.0832.26	yes	for R&S®FSW26; contact service center
RF Preamp, 100 kHz to 43.5 GHz	R&S®FSW-B24	1313.0832.43	yes	for R&S®FSW43; no export license required; contact service center

<sup>56</sup> Frequency range for R&S®FSW85 with R&S®FSW-B90G option: 2 Hz to 90 GHz (YIG preselector off).

<sup>57</sup> For instruments starting from the following serial numbers: R&S®FSW8: 101342, R&S®FSW13: 101344, R&S®FSW26: 101664, R&S®FSW43: 101450, R&S®FSW50: 101322, R&S®FSW67: 101409, R&S®FSW85: 101573

Designation	Type	Order No.	Retro-fittable	Remarks
RF Preampfier, 100 kHz to 50 GHz	R&S®FSW-B24	1313.0832.49	yes	for R&S®FSW50; no export license required; contact service center
RF Preampfier, 100 kHz to 50 GHz	R&S®FSW-B24	1313.0832.51	yes	for R&S®FSW50; export license required; contact service center
RF Preampfier, 100 kHz to 67 GHz	R&S®FSW-B24	1313.0832.66	yes	for R&S®FSW67; no export license required; contact service center
RF Preampfier, 100 kHz to 67 GHz	R&S®FSW-B24	1313.0832.67	yes	for R&S®FSW67; export license required; contact service center
Electronic Attenuator, 1 dB steps	R&S®FSW-B25	1313.0990.02	yes	for R&S®FSW8/13/26; contact service center
USB Mass Memory Write Protection	R&S®FSW-B33	1313.3602.02	no	pre-installed in factory
28 MHz Analysis Bandwidth	R&S®FSW-B28	1313.1645.02	yes	user-retrofittable
40 MHz Analysis Bandwidth	R&S®FSW-B40	1313.0861.02	yes	user-retrofittable
80 MHz Analysis Bandwidth	R&S®FSW-B80	1313.0878.02	yes	user-retrofittable
160 MHz Analysis Bandwidth	R&S®FSW-B160	1325.4850.14	yes	contact service center
320 MHz Analysis Bandwidth	R&S®FSW-B320	1325.4867.14	yes	includes 200 MHz IF filter; contact service center
512 MHz Analysis Bandwidth	R&S®FSW-B512	1331.7106.14	yes	includes 200 MHz IF filter; contact service center
1200 MHz Analysis Bandwidth	R&S®FSW-B1200	1331.6400.14	yes	for R&S®FSW26/43/50/67/85 ex-factory and for later upgrade of R&S®FSW instruments without analysis bandwidth option; for later upgrade of R&S®FSW instruments with analysis bandwidth option use R&S®FSW-U1200; not available in combination with R&S®FSW-B2000; contact service center
2000 MHz Analysis Bandwidth	R&S®FSW-B2001	1331.6916.14	yes	for R&S®FSW26/43/50/67/85 ex-factory and for later upgrade of R&S®FSW instruments without analysis bandwidth option; for later upgrade of R&S®FSW instruments with R&S®FSW-B1200 option use R&S®FSW-U2001; not available in combination with R&S®FSW-B2000; contact service center
2 GHz Analysis Bandwidth	R&S®FSW-B2000	1325.4750.02	yes	for R&S®FSW26/43/50/67/85; not available in combination with R&S®FSW-B1200/-B2001/-B800R/-B5000; uses RTO oscilloscope as digitizer; contact service center
5 GHz Analysis Bandwidth	R&S®FSW-B5000	1331.6997.43 / 1331.6997.85	yes	for R&S®FSW43/85 only; not available in combination with R&S®FSW-B2000; uses RTO oscilloscope as digitizer; contact service center
Analog Baseband Inputs, 40 MHz Analysis Bandwidth	R&S®FSW-B71	1313.1651.13	yes	for R&S®FSW8/13; contact service center
Analog Baseband Inputs, 40 MHz Analysis Bandwidth	R&S®FSW-B71	1313.1651.26	yes	for R&S®FSW26/43/50; contact service center
Analog Baseband Inputs, 40 MHz Analysis Bandwidth	R&S®FSW-B71	1313.1651.67	yes	for R&S®FSW67; contact service center
Analog Baseband Inputs, 40 MHz Analysis Bandwidth	R&S®FSW-B71	1313.1651.86	yes	for R&S®FSW85; contact service center
80 MHz Analysis Bandwidth for Analog Baseband Inputs	R&S®FSW-B71E	1313.6547.02	yes	R&S®FSW-B71 required; user-retrofittable
Oscilloscope Baseband Inputs	R&S®FSW-B2071	1331.8302.02	yes	user-retrofittable

Designation	Type	Order No.	Retro-fittable	Remarks
Real-Time Spectrum Analyzer 512 MHz, POI ≤ 15 μs	R&S®FSW-B512R	1331.7106.16	yes	contact service center includes 512 MHz analysis bandwidth and 200 MHz IF filter; export license required
Real-Time Spectrum Analyzer 800 MHz, POI ≤ 15 μs	R&S®FSW-B800R	1331.6400.16	yes	contact service center includes 2000 MHz analysis bandwidth; not available in combination with R&S®FSW-B2000; export license required
Frequency Extension 90 GHz	R&S®FSW-B90G	1331.7693.02	no	for R&S®FSW85 only; without preselection for f > 85 GHz
I/Q Memory Extension 6 GB	R&S®FSW-B106	1331.6451.02	yes	R&S®FSW-B160/-U160/-B320 required; user retrofittable
I/Q Mmemory Extension 8 GB	R&S®FSW-B108	1331.6751.02	yes	R&S®FSW-B1200/-U1200/-B2001/- U2001/-B800R required; user retrofittable
DIG IQ 40G Streaming Out Interface	R&S®FSW-B517	1331.6980.02	yes	R&S®FSW-B512/-U512/-B1200/-U1200/ -B2001/-U2001/-B800R required; user retrofittable

## Firmware

Designation	Type	Order No.	Retro-fittable	Remarks
Pulse Measurements	R&S®FSW-K6	1313.1322.02		
Time Side Lobe Measurement	R&S®FSW-K6S	1325.3738.02		R&S®FSW-K6 option required
Analog Modulation Analysis for AM/FM/φM	R&S®FSW-K7	1313.1339.02		
GSM/EDGE/EDGE Evolution/ VAMOS Measurements	R&S®FSW-K10	1313.1368.02		
VOR/ILS Measurements	R&S®FSW-K15	1331.4388.02		contact service center
Multicarrier Group Delay Measurements	R&S®FSW-K17	1313.4150.02		
Amplifier Measurements	R&S®FSW-K18	1325.2170.02		
Direct DPD Measurements	R&S®FSW-K18D	1331.6845.02		R&S®FSW-K18 option required
Frequency response measurements	R&S®FSW-K18F	1338.7230.02		R&S®FSW-K18 option required
Noise Power Ratio Measurements	R&S®FSW-K19	1331.8283.02		
Noise Figure Measurements	R&S®FSW-K30	1313.1380.02		
Security Write Protection of solid state drive	R&S®FSW-K33	1322.7936.02		
Phase Noise Measurements	R&S®FSW-K40	1313.1397.02		
Spurious Measurements	R&S®FSW-K50	1325.2893.02		
EMI Measurements	R&S®FSW-K54	1313.1400.02		
CISPR Calibration for R&S®FSW-K54	R&S®FSW-K54CAL	1331.5932.02		in line with ISO 17025 and ISO 9000; R&S®FSW-K54 option required
Transient Measurement Application	R&S®FSW-K60	1313.7495.02		
Transient Hop Measurement	R&S®FSW-K60H	1322.9916.02		R&S®FSW-K60 option required
Transient Chirp Measurement	R&S®FSW-K60C	1322.9745.02		R&S®FSW-K60 option required
Vector Signal Analysis	R&S®FSW-K70	1313.1416.02		
Multi-Modulation Analysis	R&S®FSW-K70M	1338.4177.02		R&S®FSW-K70 option required
BER PRBS measurements	R&S®FSW-K70P	1338.3893.02		R&S®FSW-K70 option required
3GPP FDD (WCDMA) BS Measurements (incl. HSDPA and HSDPA+)	R&S®FSW-K72	1313.1422.02		
3GPP FDD (WCDMA) MS Measurements (incl. HSUPA and HSUPA+)	R&S®FSW-K73	1313.1439.02		
TD-SCDMA BS Measurements	R&S®FSW-K76	1313.1445.02		
TD-SCDMA UE Measurements	R&S®FSW-K77	1313.1451.02		
CDMA2000® BS Measurements	R&S®FSW-K82	1313.1468.02		
CDMA2000® MS Measurements	R&S®FSW-K83	1313.1474.02		
1xEV-DO BS Measurements	R&S®FSW-K84	1313.1480.02		
1xEV-DO MS Measurements	R&S®FSW-K85	1313.1497.02		

Designation	Type	Order No.	Retro-fittable	Remarks
WLAN 802.11a/b/g Measurements	R&S®FSW-K91	1313.1500.02		To support signal analysis bandwidths > 10 MHz, one of the R&S®FSW-B28/-B40/-B80/-B160/-B320/-B512/-B512R/-B1200/-B2001/-B800R options is needed.
WLAN 802.11n Measurements	R&S®FSW-K91N	1313.1516.02		R&S®FSW-K91 required; to support signal analysis bandwidths > 10 MHz, one of the R&S®FSW-B28/-B40/-B80/-B160/-B320/-B512/-B512R/-B1200/-B2001/-B800R options is needed.
WLAN 802.11ac Measurements	R&S®FSW-K91AC	1313.4209.02		
WLAN 802.11ax Measurements	R&S®FSW-K91AX	1331.6345.02		
WLAN 802.11p Measurements	R&S®FSW-K91P	1321.5646.02		
WLAN 802.11ad Measurements	R&S®FSW-K95	1313.1639.02		R&S®FSW-B2001/-B2000 option required
WLAN 802.11ay Measurements	R&S®FSW-K97	1338.4902.02		R&S®FSW-B2001/-B2000/-B5000 option required
EUTRA/LTE FDD BS Measurements	R&S®FSW-K100	1313.1545.02		to support signal analysis bandwidths > 10 MHz, one of the R&S®FSW-B28/-B40/-B80/-B160/-B320/-B512/-B512R/-B1200/-B2001/-B800R options is needed.
EUTRA/LTE FDD UE Measurements	R&S®FSW-K101	1313.1551.02		
EUTRA/LTE BS MIMO Measurements	R&S®FSW-K102	1313.1568.02		
EUTRA/LTE UL Advanced UL Measurements	R&S®FSW-K103	1313.2478.02		
EUTRA/LTE TDD BS Measurements	R&S®FSW-K104	1313.1574.02		
EUTRA/LTE TDD Uplink Measurements	R&S®FSW-K105	1313.1580.02		
EUTRA/LTE NB-IoT Downlink Measurements	R&S®FSW-K106	1331.6351.02		
VERIZON 5GTF DL	R&S®FSW-K118	1331.7370.02		one of the R&S®FSW-B160/-B320/-B512/-B512R/-B1200/-B2001/-B800R options is needed.
VERIZON 5GTF UL	R&S®FSW-K119	1331.8060.02		
3GPP 5G-NR DL Measurements	R&S®FSW-K144	1338.3606.02		one of the R&S®FSW-B160/-B320/-B512/-B512R/-B1200/-B2001/-B800R options is needed.
3GPP 5G-NR UL Measurements	R&S®FSW-K145	1338.3612.02		
DOCSIS 3.1 OFDM Downstream	R&S®FSW-K192	1325.4138.02		one of the R&S®FSW-B320/-B512 options is needed
DOCSIS 3.1 OFDMA Upstream	R&S®FSW-K193	1325.4144.02		
OneWeb Reverse Link Measurements	R&S®FSW-K201	1331.7387.02		one of the R&S®FSW-B28/-B40/-B80/-B160/-B320/-B512/-B512R/-B1200/-B2001/-B800R options is needed.
160 MHz Real-Time Measurement Application, POI ≤ 15 μs	R&S®FSW-K161R	1338.2700.02		one of the R&S®FSW-B160/-B320 options is needed; not available for R&S®FSW-B512/-B512R/-B1200/-B2001/-B800R; no export license required
512 MHz Real-Time Measurement Application, POI > 15 μs	R&S®FSW-K512RE	1338.4731.02		R&S®FSW-B512 required; not available for R&S®FSW-B160/-B320/-B512R/-B1200/-B2001/-B800R; no export license required
User Defined Frequency Correction by SnP File	R&S®FSW-K544	1338.2716.02		corrects frequency response (amplitude and phase) of measurement setup.
800 MHz Real-Time Measurement Application, POI > 15 μs	R&S®FSW-K800RE	1338.7801.02		one of the R&S®FSW-B1200/-B2001 options is needed; not available for R&S®FSW-B160/-B320/-B512/-B512R/-B800R; no export license required

## PC software

Designation	Type	Order No. <sup>58</sup>
R&S®VSE Basic Edition <sup>59, 60</sup>	R&S®VSE	1345.1011.06
R&S®VSE Enterprise Edition <sup>61</sup>	R&S®VSE Enterprise Edition	1345.1105.06
Pulse Measurement Application <sup>61, 62</sup>	R&S®VSE-K6	1320.7516.06
Analog Modulation Analysis (AM/FM/φM) <sup>61, 62</sup>	R&S®VSE-K7	1320.7539.06
GSM Measurements <sup>61, 62</sup>	R&S®VSE-K10	1313.1368.06
Transient Measurements <sup>61, 62</sup>	R&S®VSE-K60	1320.7868.06
Transient Chirp Measurements <sup>61, 62</sup>	R&S®VSE-K60C	1320.7874.06
Transient Hop Measurements <sup>61, 62</sup>	R&S®VSE-K60H	1320.7880.06
Vector Signal Analysis <sup>61, 62</sup>	R&S®VSE-K70	1320.7522.06
3GPP FDD Measurements <sup>61, 62</sup>	R&S®VSE-K72	1320.7580.06
IEEE 802.11a/b/g Measurements <sup>61, 62</sup>	R&S®VSE-K91	1320.7597.06
IEEE 802.11p Measurements <sup>61, 62</sup>	R&S®VSE-K91p	1320.7680.06
IEEE 802.11n Measurements <sup>61, 62</sup>	R&S®VSE-K91n	1320.7600.06
IEEE 802.11ac Measurements <sup>61, 62</sup>	R&S®VSE-K91ac	1320.7616.06
OFDM Signal Analysis <sup>61, 62</sup>	R&S®VSE-K96	1320.7922.06
EUTRA/LTE FDD Uplink and Downlink Measurement Application <sup>61, 62</sup>	R&S®VSE-K100	1320.7545.06
EUTRA/LTE Advanced and MIMO (downlink) <sup>61, 62, 63</sup>	R&S®VSE-K102	1320.7551.06
EUTRA/LTE TDD Uplink and Downlink Measurement Application <sup>61, 62</sup>	R&S®VSE-K104	1320.7568.06
EUTRA/LTE Narrowband IoT Analysis <sup>61, 62</sup>	R&S®VSE-K106	1320.7900.06
3GPP 5G-NR Downlink and Uplink Measurement Application <sup>61, 62</sup>	R&S®VSE-K144	1309.9574.06
User Defined Frequency Correction by SnP file <sup>61, 62</sup>	R&S®VSE-K544	1309.9580.06
<b>License Dongle</b>		
License Dongle	R&S®FSPC	1310.0002.03
Floating License Dongle	R&S®FSPC-FL	1310.0002.04
<b>Service option</b>		
R&S®VSE Software Maintenance	R&S®VSE-SWM	1320.7622.81

<sup>58</sup> To obtain the floating license of the product R&S®FSPC-FL is needed and order number xxxx.xxxx.51 must be used instead of xxxx.xxxx.06 .

<sup>59</sup> Requires R&S®FSPC.

<sup>60</sup> Not available for R&S®FSPC-FL.

<sup>61</sup> Requires R&S®FSPC or R&S®FSPC-FL.

<sup>62</sup> Requires R&S®VSE or R&S®VSE Enterprise.

<sup>63</sup> Requires R&S®VSE-K100 or R&S®VSE-K104.



## Upgrades

Designation	Type	Order No.	Retro-fittable	Remarks
Analysis Bandwidth Upgrade from 28 MHz to 40 MHz	R&S®FSW-U40	1313.5205.02	yes	user-retrofittable; R&S®FSW-B28 required
Analysis Bandwidth Upgrade from 40 MHz to 80 MHz	R&S®FSW-U80	1313.5211.02	yes	user-retrofittable; R&S®FSW-B40 or R&S®FSW-U40 required
Analysis Bandwidth Upgrade from 80 MHz to 160 MHz	R&S®FSW-U160	1325.5357.14	yes	contact service center; R&S®FSW-B80 or R&S®FSW-U80 required
Analysis Bandwidth Upgrade from 160 MHz to 320 MHz	R&S®FSW-U320	1313.7189.02	yes	user-retrofittable; R&S®FSW-B160/-U160 required
Analysis Bandwidth Upgrade from 80 MHz to 512 MHz	R&S®FSW-U512	1321.6320.24	yes	contact service center; R&S®FSW-B80 or R&S®FSW-U80 required; excludes R&S®FSW-B160/-U160/-B320
Analysis Bandwidth Upgrade from 80 MHz, 160 MHz, 320 MHz, 512 MHz to 1200 MHz	R&S®FSW-U1200	1331.7006.14	yes	contact service center; for R&S®FSW26/43/50/67/85; R&S®FSW-B80 or R&S®FSW-B160/-U160 or R&S®FSW-B320/-U320 or R&S®FSW-B512/-U512 required. Not available for instruments with R&S®FSW-B512R, R&S®FSW-U512R, R&S®FSW-B2000, R&S®FSW-U2000
Analysis Bandwidth Upgrade from 1200 MHz to 2000 MHz	R&S®FSW-U2001	1331.7070.02	yes	R&S®FSW-B1200 or R&S®FSW-U1200 required; user-retrofittable
Upgrade Real-Time Spectrum Analyzer 512 MHz POI ≤ 15 μs	R&S®FSW-U512R	1321.6320.26	yes	contact service center; includes 512 MHz analysis bandwidth; R&S®FSW-B80 or R&S®FSW-U80 required; export license required
Upgrade to 5 GHz Signal Analysis Bandwidth	R&S®FSW-U5000	1331.7629.44	yes	for R&S®FSW43; uses R&S®RTO oscilloscope as digitizer; contact service center
Upgrade to 5 GHz Signal Analysis Bandwidth	R&S®FSW-U5000	1331.7629.86	yes	for R&S®FSW85; uses R&S®RTO oscilloscope as digitizer; contact service center

## Recommended extras

Designation	Type	Order No.
Headphones		0708.9010.00
IEC/IEEE Bus Cable, length: 1 m	R&S®PCK	0292.2013.10
IEC/IEEE Bus Cable, length: 2 m	R&S®PCK	0292.2013.20
19" Rack Adapter	R&S®ZZA-KN5	1175.3040.00
<b>Noise sources</b>		
Smart noise sources for noise figure and gain measurement up to 55 GHz (requires R&S®FSW-K30)	R&S®FS-SNS26/40/55	1338.8008.xx (xx = 26/40/55)
<b>Matching pads, 50/75 Ω</b>		
L Section, matching at both ends	R&S®RAM	0358.5414.02
Series Resistor, 25 Ω, matching at one end (taken into account in instrument function RF INPUT 75 Ω)	R&S®RAZ	0358.5714.02
<b>High-power attenuators</b>		
100 W, 3/6/10/20/30 dB, 1 GHz	R&S®RBU100	1073.8495.xx (xx = 03/06/10/20/30)
50 W, 3/6/10/20/30 dB, 2 GHz	R&S®RBU50	1073.8695.xx (xx = 03/06/10/20/30)
50 W, 20 dB, 6 GHz	R&S®RDL50	1035.1700.52
<b>RF adapters and cables</b>		
Coaxial adapter 1.00 mm (f) - 1.00 mm (f)		3592.8694.00
Coaxial adapter 1.00 mm (f) - 1.85 mm (f)		3628.4734.02
Coaxial adapter 1.85 mm (f) - 1.85 mm (f)		3588.9654.00
Coaxial semi-rigid cable 1.85 mm (m) - 1.85 mm (m), length 90 mm, U shape		1325.1251.00
Coaxial adapter 1.85 mm (f) - 2.92 mm (f)		3628.4728.02
Coaxial adapter 2.92 mm (f) - 2.92 mm (f)		3588.8664.00
Coaxial adapter 3.5 mm (f) - 3.5 mm (f), APC3.5-compatible		3587.7793.00
Coaxial adapter 3.5 mm (m) - 3.5 mm (m), APC3.5-compatible		3587.7770.00
Coaxial adapter N (f) - 3.5 mm (m), APC3.5-compatible		3587.7806.00
Coaxial adapter N (f) - 3.5 mm (f), APC3.5-compatible		3587.7829.00
Coaxial cable SMA (m) - SMA (m), length 1 m		3586.9970.00
DUT positioner for R&S®FSW85	R&S®FS-Z124	1338.4783.02
<b>Connectors and cables</b>		
Probe power connector, 3-pin		1065.9480.00
N-Type Adapter for R&S®RT-Zxx oscilloscope probes	R&S®RT-ZA9	1417.0909.02
Cable for connecting digital baseband interfaces of Rohde & Schwarz instruments (accessory for R&S®FSW-B17)	R&S®SMU-Z6	1415.0201.02
Cable for connecting high speed digital baseband interfaces of Rohde & Schwarz instruments (accessory for R&S®FSW-B517)	R&S®DIGIQ-HS	3641.2948.03
<b>DC blocks</b>		
DC Block, 10 kHz to 18 GHz (N type)	R&S®FSE-Z4	1084.7443.02
<b>External harmonic mixers (for R&amp;S®FSW26, R&amp;S®FSW43, R&amp;S®FSW50, R&amp;S®FSW67 and R&amp;S®FSW85 with R&amp;S®FSW-B21 option)</b>		
Harmonic Mixer, 40 GHz to 60 GHz	RPG FS-Z60 <sup>64</sup>	1048.0171.02
Harmonic Mixer, 50 GHz to 75 GHz	RPG FS-Z75 <sup>64</sup>	3638.2240.02
Harmonic Mixer, 60 GHz to 90 GHz	RPG FS-Z90 <sup>64</sup>	3638.2270.02
Harmonic Mixer, 75 GHz to 110 GHz	RPG FS-Z110 <sup>64</sup>	3638.2292.02
Harmonic Mixer, 90 GHz to 140 GHz	RPG FS-Z140 <sup>64</sup>	3622.0708.02
Harmonic Mixer, 110 GHz to 170 GHz	RPG FS-Z170 <sup>64</sup>	3622.0714.02
Harmonic Mixer, 140 GHz to 220 GHz	RPG FS-Z220 <sup>64</sup>	3593.3250.02
Harmonic Mixer, 220 GHz to 325 GHz	RPG FS-Z325 <sup>64</sup>	3593.3267.02
Harmonic Mixer, 325 GHz to 500 GHz	RPG FS-Z500 <sup>64</sup>	3593.3273.02
<b>Waveguide to coaxial adapters</b>		
Waveguide to coaxial adapter WR10 - 1 mm (f)	WCA110	3626.1067.02
Waveguide to coaxial adapter WR10 - 1 mm (m)	WCA110	3626.1067.03
Waveguide to coaxial adapter WR12 - 1 mm (m)	WCA90	3626.1050.03
Waveguide to coaxial adapter WR15 - 1 mm (f)	WCA75	3626.1044.02
Waveguide to coaxial adapter WR15 - 1 mm (m)	WCA75	3626.1044.03
Waveguide to coaxial adapter WR12 - 1 mm (f)	WCA90	3626.1050.02

<sup>64</sup> RPG is the abbreviation of Radiometer Physics GmbH, a Rohde & Schwarz company.

Designation	Type	Order No.
<b>Horn antennas</b>		
Horn antenna 110 GHz to 170 GHz	FH-SG-170	3629.2493.02
Horn antenna 26 GHz to 40 GHz	FH-SG-40	3629.2393.02
Horn antenna 50 GHz to 75 GHz	FH-SG-75	3629.2458.02
Horn antenna 60 GHz to 90 GHz	FH-SG-90	3629.2464.02
<b>Tools</b>		
Torque Wrench for type N connectors, 1.5 Nm coupling torque (for R&S®FSW8/13)	R&S®ZN-ZTW	1328.8534.71
Torque Wrench for 3.5/2.92/2.4/1.85 mm connectors, 0.9 Nm coupling torque (for R&S®FSW26/43/50/67)	R&S®ZN-ZTW	1328.8534.35
Torque Wrench for 1.0 mm connectors, 0.23 Nm coupling torque (for R&S®FSW85)	R&S®ZN-ZTW	1328.8534.11

## Power sensors supported <sup>65</sup>

Designation	Type	Order No.
<b>Universal power sensors</b>		
10 MHz to 8 GHz, 100 mW, 2-path	R&S®NRP-Z211	1417.0409.02
10 MHz to 8 GHz, 200 mW	R&S®NRP-Z11 <sup>66</sup>	1138.3004.02
10 MHz to 18 GHz, 100 mW, 2-path	R&S®NRP-Z221	1417.0309.02
10 MHz to 18 GHz, 200 mW	R&S®NRP-Z21 <sup>66</sup>	1137.6000.02
10 MHz to 18 GHz, 2 W	R&S®NRP-Z22 <sup>66</sup>	1137.7506.02
10 MHz to 18 GHz, 15 W	R&S®NRP-Z23 <sup>66</sup>	1137.8002.02
10 MHz to 18 GHz, 30 W	R&S®NRP-Z24 <sup>66</sup>	1137.8502.02
<b>Power sensor modules with power splitter</b>		
DC to 18 GHz, 500 mW	R&S®NRP-Z27	1169.4102.02
DC to 26.5 GHz, 500 mW	R&S®NRP-Z37	1169.3206.02
<b>Thermal power sensors <sup>67</sup></b>		
0 Hz to 18 GHz, 100 mW	R&S®NRP18T	1424.6115.02
0 Hz to 18 GHz, 100 mW	R&S®NRP18TN	1424.6121.02
0 Hz to 33 GHz, 100 mW	R&S®NRP33T	1424.6138.02
0 Hz to 33 GHz, 100 mW	R&S®NRP33TN	1424.6144.02
0 Hz to 40 GHz, 100 mW	R&S®NRP40T	1424.6150.02
0 Hz to 40 GHz, 100 mW	R&S®NRP40TN	1424.6167.02
0 Hz to 50 GHz, 100 mW	R&S®NRP50T	1424.6173.02
0 Hz to 50 GHz, 100 mW	R&S®NRP50TN	1424.6180.02
0 Hz to 67 GHz, 100 mW	R&S®NRP67T	1424.6196.02
0 Hz to 67 GHz, 100 mW	R&S®NRP67TN	1424.6209.02
0 Hz to 110 GHz, 100 mW	R&S®NRP110T	1424.6215.02
<b>Thermal waveguide power sensors</b>		
50 GHz to 75 GHz, 100 mW	R&S®NRP75TWG	1700.2529.02
60 GHz to 90 GHz, 100 mW	R&S®NRP90TWG	1700.2312.02
75 GHz to 110 GHz, 100 mW	R&S®NRP110TWG	1173.8709.02
<b>Average power sensors <sup>67</sup></b>		
8 kHz to 6 GHz, 200 mW	R&S®NRP6A	1424.6796.02
8 kHz to 6 GHz, 200 mW	R&S®NRP6AN	1424.6809.02
9 kHz to 6 GHz, 200 mW	R&S®NRP-Z91 <sup>66</sup>	1168.8004.02
8 kHz to 18 GHz, 200 mW	R&S®NRP18A	1424.6815.02
8 kHz to 18 GHz, 200 mW	R&S®NRP18AN	1424.6821.02
<b>Three path diode power sensors <sup>67</sup></b>		
100 pW to 200 mW, 10 MHz to 8 GHz	R&S®NRP8S	1419.0006.02
100 pW to 200 mW, 10 MHz to 8 GHz, LAN version	R&S®NRP8SN	1419.0012.02
100 pW to 200 mW, 10 MHz to 18 GHz	R&S®NRP18S	1419.0029.02
100 pW to 200 mW, 10 MHz to 18 GHz, LAN version	R&S®NRP18SN	1419.0035.02
1 nW to 2 W, 10 MHz to 18 GHz	R&S®NRP18S-10	1424.6721.02
10 nW to 15 W, 10 MHz to 18 GHz	R&S®NRP18S-20	1424.6738.02
30 nW to 30 W, 10 MHz to 18 GHz	R&S®NRP18S-25	1424.6744.02
100 pW to 200 mW, 10 MHz to 33 GHz	R&S®NRP33S	1419.0064.02
100 pW to 200 mW, 10 MHz to 33 GHz, LAN version	R&S®NRP33SN	1419.0070.02
100 pW to 200 mW, 10 MHz to 33 GHz, LAN version, TVAC-compliant	R&S®NRP33SN-V	1419.0129.02
100 pW to 100 mW, 50 MHz to 40 GHz	R&S®NRP40S	1419.0041.02
100 pW to 100 mW, 50 MHz to 40 GHz, LAN version	R&S®NRP40SN	1419.0058.02
100 pW to 100 mW, 50 MHz to 50 GHz	R&S®NRP50S	1419.0087.02
100 pW to 100 mW, 50 MHz to 50 GHz, LAN version	R&S®NRP50SN	1419.0093.02
<b>Wideband power sensors <sup>67</sup></b>		
50 MHz to 18 GHz, 100 mW	R&S®NRP-Z81	1137.9009.02
50 MHz to 40 GHz, 100 mW (2.92 mm)	R&S®NRP-Z85	1411.7501.02
50 MHz to 40 GHz, 100 mW (2.40 mm)	R&S®NRP-Z86	1417.0109.40
50 MHz to 44 GHz, 100 mW (2.40 mm)	R&S®NRP-Z86	1417.0109.44

<sup>65</sup> For average power measurement only.

<sup>66</sup> Product discontinued.

<sup>67</sup> In addition to RF power measurements the R&S®NRP-Z8x, R&S®NRPxxT/TN, R&S®NRPxxA/AN and R&S®NRPxxS/SN power sensors can be used as wideband RF power trigger sources.

## Probes supported by R&S®FSW-B71/-B71E option

Designation	Type	Order No.
1.0 GHz, active, 1 M $\Omega$ , 0.8 pF	R&S®RT-ZS10E	1418.7007.02
1.0 GHz, active, 1 M $\Omega$ , 0.8 pF, micro button	R&S®RT-ZS10	1410.4080.02
1.5 GHz, active, 1 M $\Omega$ , 0.8 pF, micro button	R&S®RT-ZS20	1410.3502.02
3.0 GHz, active, 1 M $\Omega$ , 0.8 pF, micro button	R&S®RT-ZS30	1410.4309.02
6.0 GHz, active, 1 M $\Omega$ , 0.3 pF, micro button	R&S®RT-ZS60	1418.7307.02
1.5 GHz, active, differential, 1 M $\Omega$ , 0.6 pF, micro button	R&S®RT-ZD20	1410.4409.02
3.0 GHz, active, differential, 1 M $\Omega$ , 0.6 pF, micro button	R&S®RT-ZD30	1410.4609.02
4.5 GHz, active, differential, 1 M $\Omega$ , 0.4 pF, micro button	R&S®RT-ZD40	1410.5205.02
1.5 GHz Modular Probe Amplifier, differential, 400 k $\Omega$ , multimode, incl. R&S®ProbeMeter; micro button	R&S®RT-ZM15	1800.4700.02
3 GHz Modular Probe Amplifier, differential, 400 k $\Omega$ , multimode, incl. R&S®ProbeMeter; micro button	R&S®RT-ZM30	1419.3005.02
6 GHz Modular Probe Amplifier, differential, 400 k $\Omega$ , multimode, incl. R&S®ProbeMeter; micro button	R&S®RT-ZM60	1419.3105.02
9 GHz Modular Probe Amplifier, differential, 400 k $\Omega$ , multimode, incl. R&S®ProbeMeter; micro button	R&S®RT-ZM90	1419.4301.02
<b>Accessories for modular probes</b>		
Tip Cable, solder in, extended temperature, length: 15 cm, multimode compatible	R&S®RT-ZMA11	1419.4318.02
Tip Cable, square pin, for 1.27 mm pin header, length: 15 cm, multimode compatible	R&S®RT-ZMA12	1419.4324.02
Tip Cable, quick connect, for solder in resistor connection, length: 15 cm, multimode compatible	R&S®RT-ZMA15	1419.4224.02
Browser Module, variable span from 0.5 mm to 8 mm, spring-loaded, incl. spring loaded resistor tips (2 pairs)	R&S®RT-ZMA30	1419.4353.02
SMA Module, 2.92 mm/3.5 mm/SMA, differential, 100 $\Omega$ , DC termination, multimode compatible; incl. lead 11 cm (4.3 in)	R&S®RT-ZMA40	1419.4201.02
Extended Temperature Kit, 1 m matched cable pair, multimode compatible, incl. R&S®RT-ZMA11	R&S®RT-ZMA50	1419.4218.02

## Oscilloscopes supported by R&S®FSW-B2000/-B2071 option

Designation	Type	Order No.
Digital Oscilloscope, 4 GHz, 20 Gsample/s, 20/80 Msample, 4 channels	R&S®RTO1044 <sup>66</sup>	1316.1000.44
OCXO 10 MHz	R&S®RTO-B4	1304.8305.02
Memory Upgrade, 50 Msample per channel	R&S®RTO-B101	1304.8428.02
Memory Upgrade, 100 Msample per channel	R&S®RTO-B102	1304.8434.02
Memory Upgrade, 200 Msample per channel	R&S®RTO-B103	1304.8440.02
Memory Upgrade, 400 Msample per channel	R&S®RTO-B104	1304.8457.02

Designation	Type	Order No.
Digital Oscilloscope, 4 GHz, 20 Gsample/s, 50/200 Msample, 4 channels	R&S®RTO2044	1329.7002.44
OCXO 10 MHz	R&S®RTO-B4	1304.8305.02
Memory Upgrade, 100 Msample per channel	R&S®RTO-B101	1329.7060.02
Memory Upgrade, 200 Msample per channel	R&S®RTO-B102	1329.7077.02
Memory Upgrade, 400 Msample per channel	R&S®RTO-B104	1329.7083.02
Memory Upgrade, 1 Gsample per channel	R&S®RTO-B110	1329.7090.04

## Oscilloscopes supported by R&S®FSW-B2000/-B2071 and R&S®FSW-B5000 option

Designation	Type	Order No.
Digital Oscilloscope, 6 GHz, 20 Gsample/s, 50/200 Msample, 4 channels	R&S®RTO2064	1329.7002.64
OCXO 10 MHz	R&S®RTO-B4	1304.8305.02
Memory Upgrade, 100 Msample per channel	R&S®RTO-B101	1329.7060.02
Memory Upgrade, 200 Msample per channel	R&S®RTO-B102	1329.7077.02
Memory Upgrade, 400 Msample per channel	R&S®RTO-B104	1329.7083.02
Memory Upgrade, 1 Gsample per channel	R&S®RTO-B110	1329.7090.04

## Service options

Service options		
Extended Warranty, one year	R&S®WE1	Please contact your local
Extended Warranty, two years	R&S®WE2	
Extended Warranty with Calibration Coverage, one year	R&S®CW1	Rohde & Schwarz sales office.
Extended Warranty with Calibration Coverage, two years	R&S®CW2	

### Extended warranty with a term of one and two years (WE1 and WE2)

Repairs carried out during the contract term are free of charge <sup>68</sup>. Necessary calibration and adjustments carried out during repairs are also covered.

### Extended warranty with calibration coverage (CW1 and CW2)

Enhance your extended warranty by adding calibration coverage at a package price. This package ensures that your Rohde & Schwarz product is regularly calibrated, inspected and maintained during the term of the contract. It includes all repairs <sup>68</sup> and calibration at the recommended intervals as well as any calibration carried out during repairs or option upgrades.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Rohde & Schwarz is under license.

CDMA2000® is a registered trademark of the Telecommunications Industry Association (TIA-USA).

WiMAX Forum is a registered trademark of the WiMAX Forum. WiMAX, the WiMAX Forum logo, WiMAX Forum Certified, and the WiMAX Forum Certified logo are trademarks of the WiMAX Forum.

The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.

---

<sup>68</sup> Excluding defects caused by incorrect operation or handling and force majeure. Wear-and-tear parts are not included.



## Service that adds value

- | Worldwide
- | Local and personalized
- | Customized and flexible
- | Uncompromising quality
- | Long-term dependability

## Rohde & Schwarz

The Rohde & Schwarz electronics group offers innovative solutions in the following business fields: test and measurement, broadcast and media, secure communications, cybersecurity, monitoring and network testing. Founded more than 80 years ago, the independent company which is headquartered in Munich, Germany, has an extensive sales and service network with locations in more than 70 countries.

[www.rohde-schwarz.com](http://www.rohde-schwarz.com)

## Sustainable product design

- | Environmental compatibility and eco-footprint
- | Energy efficiency and low emissions
- | Longevity and optimized total cost of ownership

Certified Quality Management  
**ISO 9001**

Certified Environmental Management  
**ISO 14001**

## Rohde & Schwarz training

[www.training.rohde-schwarz.com](http://www.training.rohde-schwarz.com)

## Regional contact

- | Europe, Africa, Middle East | +49 89 4129 12345  
[customersupport@rohde-schwarz.com](mailto:customersupport@rohde-schwarz.com)
- | North America | 1 888 TEST RSA (1 888 837 87 72)  
[customer.support@rsa.rohde-schwarz.com](mailto:customer.support@rsa.rohde-schwarz.com)
- | Latin America | +1 410 910 79 88  
[customersupport.la@rohde-schwarz.com](mailto:customersupport.la@rohde-schwarz.com)
- | Asia Pacific | +65 65 13 04 88  
[customersupport.asia@rohde-schwarz.com](mailto:customersupport.asia@rohde-schwarz.com)
- | China | +86 800 810 82 28 | +86 400 650 58 96  
[customersupport.china@rohde-schwarz.com](mailto:customersupport.china@rohde-schwarz.com)

R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG  
Trade names are trademarks of the owners  
PD 5215.6749.22 | Version 04.00 | August 2019 (GK)  
R&S®FSW Signal and Spectrum Analyzer  
Data without tolerance limits is not binding | Subject to change  
© 2019 Rohde & Schwarz GmbH & Co. KG | 81671 Munich, Germany



5215674922