
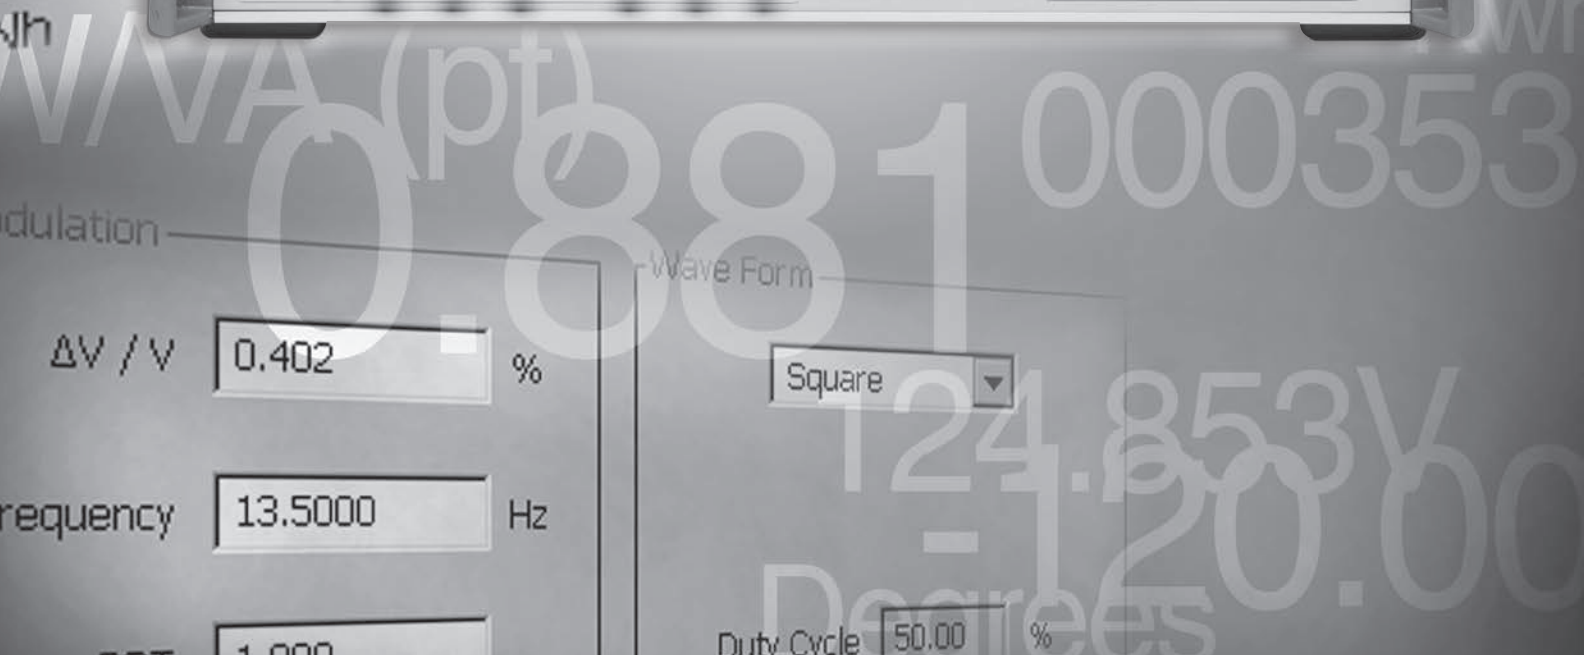


FLUKE®

Calibration

6100B/6105A Electrical Power Standards Extended Specifications

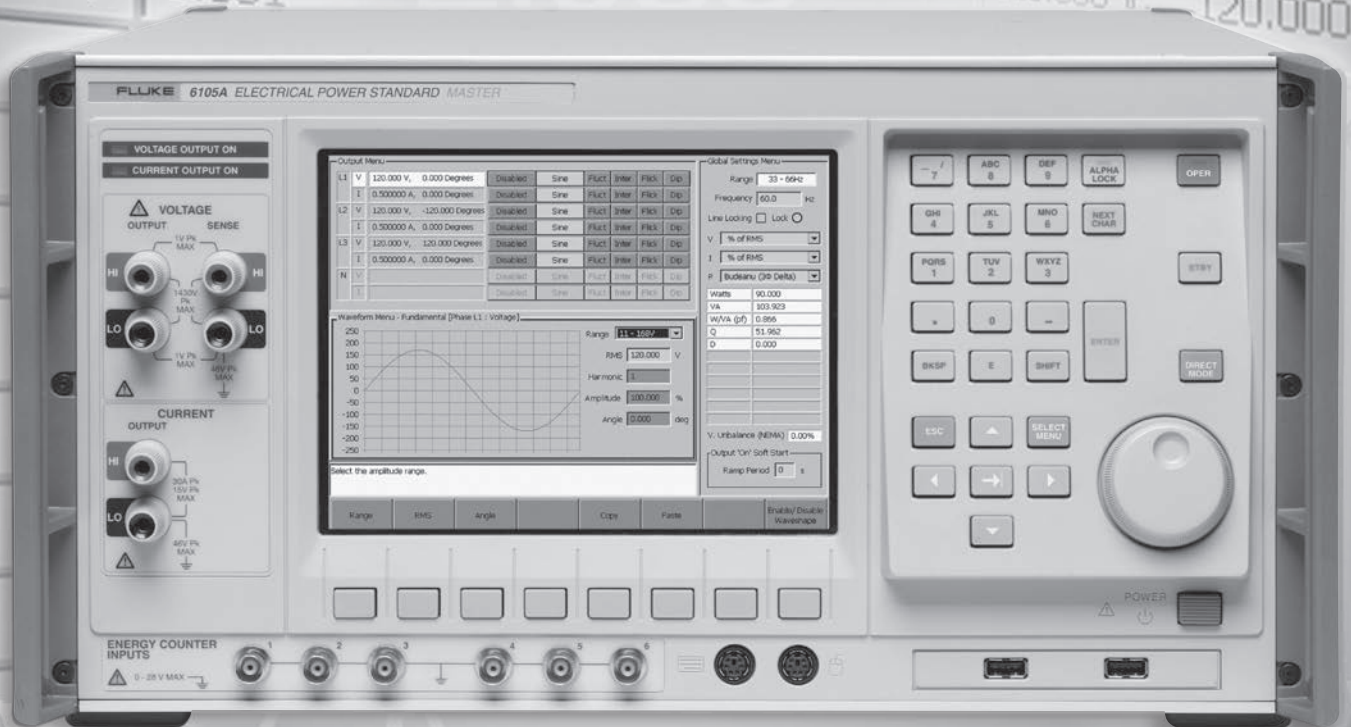

The most accurate solutions: 6100B and 6105A

In 2002, Fluke Calibration launched the 6100A and 6101A Electrical Power Standards. The 6100A/6101A combined source stability with reference accuracy in a single product.

The 6100A and 6101A have now been replaced by the 6100B and 6101B. These newer models have the same power quality and functionality as their predecessors, to comfortably meet the accuracy requirements for power quality testing standards. In addition, they feature improved accuracy to match that of the best measurement devices for sinusoidal waveforms.

Few systems can match the 0.007 % (66 ppm) one year energy accuracy provided by the 6105A for sinusoidal waveforms. Waveforms with high harmonic distortion are delivered with similar accuracy traceable to national and international standards.

Choosing between a 6100B or 6105A depends on your accuracy requirements. Both models meet all accuracy requirements of power quality testing to the IEC 61000-4 series of standards. The 6100B can also be used to type test 0.1 % to 2 % energy meters.

Choose the 6105A when you need the highest accuracy available for calibrating secondary standard meters, energy revenue meters and type test applications.


The 6100A and 6101A also include increased voltage channel current drive, for calibrating energy meters which take power from their voltage input.



6101B



6106A

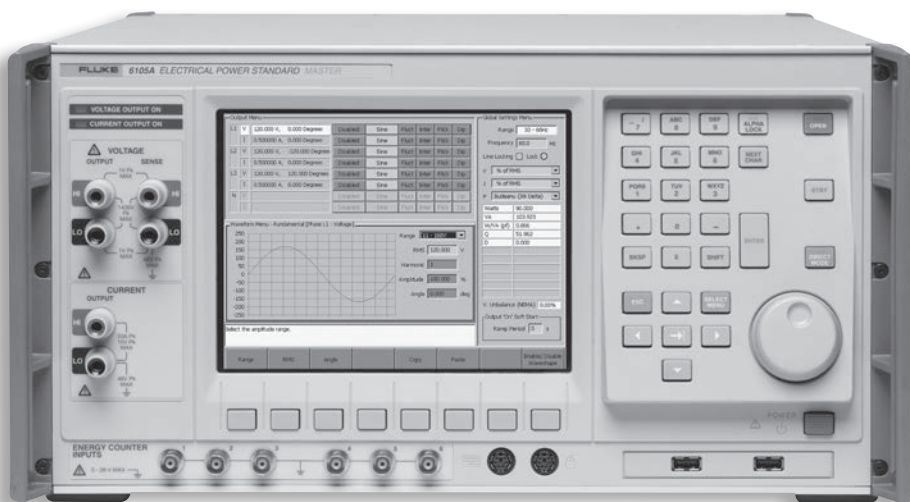

The 6105A provides the accuracy required to verify the performance of secondary standards such as those produced by Radian Research, Zera, and MTE.

6105A

General Specifications

Input Power

| | |
|------------------------|--|
| Voltage | 100 V - 240 V with up to ± 10 % fluctuations |
| Transient overvoltages | Impulse withstand (overvoltage) category II of IEC 60364-4-443 |
| Frequency | 47 Hz - 63 Hz |
| Max. Consumption | 1000 VA max from 100 - 130 V, 1250 VA max from 130 V - 260 V |

Dimensions

| | 6100B, 6101B, 6105A, and 6106A | With 50 A or 80 A Options |
|-----------------------|--------------------------------|---------------------------|
| Height | 233 mm (9.17 inches) | 324 mm (12.8 inches) |
| Height (without feet) | 219 mm (8.6 inches) | 310 mm (12.2 inches) |
| Width | 432 mm (17 inches) | 432 mm (17 inches) |
| Depth | 630 mm (24.8 inches) | 630 mm (24.8 inches) |
| Weight | 23 kg (51 lb) | 30 kg (66 lb) |

Environment

| | |
|--|---|
| Operating temperature | 5 °C - 35 °C |
| Calibration temperature (tcal) range | 16 °C - 30 °C |
| Storage temperature | 0 °C - 50 °C |
| Transit temperature | -20 °C - 60 °C <100 hours |
| Warm up time | 1 hour |
| Safe operating max. relative humidity (non-condensing) | <80 % 5 °C - 31 °C ramping linearly down to 50 % at 35 °C |
| Storage max. relative humidity (non-condensing) | <95 % 0 °C - 50 °C |
| Operating altitude | 0 m - 2,000 m |
| Non-operating altitude | 0 m - 12,000 m |
| Shock | MIL-PRF-28800F class 3 |
| Vibration | MIL-PRF-28800F class 3 |
| Enclosure | MIL-PRF-28800F class 3 |

Safety

- Meets CAN/CSA-C22.2 No 61010.1-04, UL Std. No. 61010-1 (2nd Edition), ISA-82.02.01
Reference Standard: IEC 61010-1:2001
- Indoor use only, pollution degree 2; installation category II
- CE marked and CSA listed

EMC


EN61326-1:2006, CISPR II Class A, FCC rules part 15, sub-part B, class A (Class A equipment is suitable for use in establishments other than domestic, and those directly connected to a low voltage power supply network which supplies buildings used for domestic purposes).

General Electrical Specifications

| | |
|--|---|
| Voltage/Current amplitude setting resolution | 6 digits |
| Range of fundamental frequencies | 16 Hz - 850 Hz |
| Line frequency locking | 45 Hz - 65.9 Hz at user's discretion |
| Frequency accuracy | ±50 ppm |
| Frequency setting resolution | 0.1 Hz |
| Warm up time to full accuracy | 1 hour or twice the time since last warmed up |
| Settling time following change to the output | 0 to 10 seconds |
| Nominal angle between voltage phases | 120 ° |
| Nominal angle between voltage and current of a phase | 0 ° |
| Phase angle setting | ±180 °, ± π radians ^[1] |
| Phase angle setting resolution | 0.001 °, 0.00001 radians ^[1] |
| Maximum number of voltage harmonics | 100 including the 1 st (fundamental frequency) |
| Maximum number of current harmonics | 100 including the 1 st (fundamental frequency) |

[1] Switching between phase set in degrees, phase set in radians and back may not be consistent because of calculation rounding errors.

Amplitude/Frequency Limits

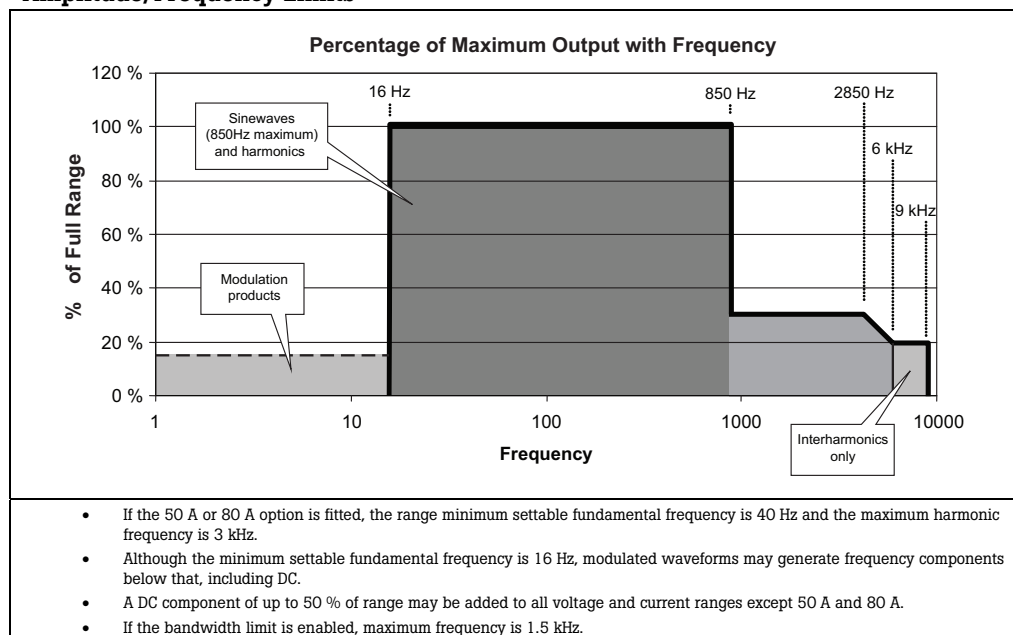

Open and Closed Loop Operation

Full accuracy for pure sine or sine plus harmonics is achieved by using analog and digital feedback systems (closed loop). When any of: Flicker, Fluctuating harmonics, Dip/Swell or Interharmonics are applied, the digital system is automatically uncoupled (open loop). Initial performance is as described in the 1-year accuracy column but performance degrades with time as described by the stability column. Full accuracy can be restored by momentarily disabling whichever of Flicker, Fluctuating harmonics, Dip/Swell or Interharmonics are enabled, or by changing the value of the sine wave or any harmonic for that channel.

Electrical Specifications

The accuracies stated include the calibration uncertainty provided by Fluke Service Centers. In the following specifications, uncertainty is stated at coverage factor $k = 2$, equivalent to 96 % confidence level, in accordance with accepted metrology practices.

Voltage Specifications

Voltage Channel Maximum Capacitive Loading for Output Stability

The voltage output will remain stable with 100 nF load but may not be able to drive that capacitance at all voltage/frequency/harmonic combinations due to burden current limitations.

Voltage Range Limits and Burden

| | | | | | | | |
|---|--------|--------|---------|---------|--------|----------------------|--------|
| Full Range (FR) | 23 V | 45 V | 90 V | 180 V | 360 V | 650 V ^[4] | 1008 V |
| Max peak ^{[1][2]} | 32.5 V | 63.6 V | 127.2 V | 254.5 V | 509 V | 919 V | 1425 V |
| Maximum Burden (peak current) ^[3] | 1 A | 1 A | 1 A | 1 A | 1 A | 1 A | 71 mA |
| Maximum Burden (RMS current) ^[3] | 500 mA | 500 mA | 500 mA | 250 mA | 150 mA | 110 mA | 60 mA |

[1] These values apply to sinusoidal, distorted and modulated wave-shapes.

[2] Voltage harmonic phase angle significantly affects the peak value of a non-sinusoidal waveform.

[3] To achieve specifications in 4-wire sense, resistance in the sense lead must be less than 1 Ω and resistance in the power leads less than 1.5 Ω .

[4] 6105A and 6101B only.

[5] The peak current cannot be sustained and is dependent on the voltage level at which it is requested. It will not be possible to achieve this current when the output is at 0 V but it will be achievable as the voltage approaches the peak level of the waveform. High peak current capability is provided to drive meters that take pulses of current from the signal.

Voltage Sine Amplitude Specifications

| Ranges | Frequency | Voltage ^[5] | 6105A & 6106A 1-Year Accuracy, tcal ^[4] ±5 °C ± (ppm of output + mV) ^[1] | | 6100B & 6101B 1-Year Accuracy, tcal ^[4] ±5 °C ± (ppm of output + mV) ^[1] | | 6100B, 6101B, 6105A & 6106A Open Loop 24-Hour Stability ± (ppm of output + mV) ^{[2][3]} | |
|---------------|----------------|------------------------|--|-----|--|-----|--|-----|
| | | | | | | | | |
| 1.0 V - 23 V | 45 Hz - 65 Hz | 15 V - 17 V | 42 | 0 | 112 | 1 | 75 | 0.8 |
| | | 1.0 V - 23 V | 42 | 0.2 | | | | |
| | 16 Hz - 850 Hz | 1.0 V - 23 V | 60 | 0.2 | | | | |
| 3 V - 45 V | 45 Hz - 65 Hz | 28 V - 32 V | 42 | 0 | 112 | 2 | 75 | 0.8 |
| | | 3 V - 45 V | 42 | 0.4 | | | | |
| | 16 Hz - 850 Hz | 3 V - 45 V | 60 | 0.4 | | | | |
| 6.3 V - 90 V | 45 Hz - 65 Hz | 56 V - 64 V | 42 | 0 | 112 | 2.2 | 75 | 0.8 |
| | | 6.3 V - 90 V | 42 | 0.8 | | | | |
| | 16 Hz - 850 Hz | 6.3 V - 90 V | 60 | 0.8 | | | | |
| 13 V - 180 V | 45 Hz - 65 Hz | 110 V - 128 V | 44 | 0 | 112 | 4.4 | 75 | 1.5 |
| | | 13 V - 180 V | 44 | 1.6 | | | | |
| | 16 Hz - 850 Hz | 13 V - 180 V | 60 | 1.6 | | | | |
| 25 V - 360 V | 45 Hz - 65 Hz | 215 V - 246 V | 44 | 0 | 112 | 8.8 | 75 | 3 |
| | | 25 V - 360 V | 60 | 3.2 | | | | |
| | 16 Hz - 850 Hz | 25 V - 360 V | 61 | 3.2 | | | | |
| 46 V - 650 V | 45 Hz - 65 Hz | 425 V - 490 V | 44 | 0 | - | - | 75 | 6 |
| | | 46 V - 650 V | 60 | 5.8 | | | | |
| | 16 Hz - 850 Hz | 46 V - 650 V | 61 | 5.8 | | | | |
| 70 V - 1008 V | 45 Hz - 65 Hz | 740 V - 850 V | 44 | 0 | 150 | 26 | 75 | 10 |
| | | 70 V - 1008 V | 60 | 10 | | | | |
| | 16 Hz - 850 Hz | 70 V - 1008 V | 61 | 10 | | | | |

[1] Four-wire sense only, for two-wire operation, add an additional voltage = 0.3 Ω x maximum burden current to the accuracy specification.

[2] For ±1 °C and constant load and connection conditions.

[3] When Flicker, Fluctuating harmonics, Dip/Swell or Interharmonics are applied, Open Loop Stability specification must be added to the 1-year accuracy specification as described in "Open and Closed Loop Operation".

[4] tcal = temperature of last calibration.

[5] Output levels less than the range minimum can be set but are not specified.

Voltage DC and Harmonic Amplitude Specifications

| Range | Output ^{[4][5]} | Frequency | 6105A & 6106A 1-Year Accuracy, tcal ^[4] ±5 °C ±(ppm of output + mV) ^{[1][6]} | | 6100B & 6101B 1-Year Accuracy, tcal ^[4] ±5 °C ±(ppm of output + mV) ^{[1][6]} | | Open Loop 24-Hour Stability ± (ppm of output + mV) ^{[2][3]} | |
|---------------|--------------------------|----------------|---|-----|---|-----|--|-----|
| | | | | | | | | |
| 1.0 V - 23 V | 0 V - 11.5 V | DC | 91 | 2 | 122 | 5 | 75 | 1.8 |
| | 0 V - 6.9 V | 16 Hz - 850 Hz | 58 | 1 | 122 | 1 | 75 | 0.8 |
| | | 850 Hz - 6 kHz | 451 | 1 | 512 | 1 | 150 | 0.8 |
| 3 V - 45 V | 0 V - 22.5 V | DC | 91 | 4 | 122 | 10 | 75 | 3.3 |
| | 0 V - 13.5 V | 16 Hz - 850 Hz | 58 | 2 | 122 | 2 | 75 | 0.8 |
| | | 850 Hz - 6 kHz | 451 | 2 | 512 | 2 | 150 | 0.8 |
| 6.3 V - 90 V | 0 V - 45 V | DC | 91 | 8 | 122 | 24 | 75 | 8 |
| | 0 V - 27 V | 16 Hz - 850 Hz | 60 | 2.2 | 122 | 2.2 | 75 | 0.8 |
| | | 850 Hz - 6 kHz | 451 | 2.2 | 512 | 2.2 | 150 | 0.8 |
| 13 V - 180 V | 0 V - 90 V | DC | 91 | 16 | 122 | 50 | 75 | 15 |
| | 0 V - 54 V | 16 Hz - 850 Hz | 60 | 4.4 | 122 | 4.4 | 75 | 1.5 |
| | | 850 Hz - 6 kHz | 451 | 4.4 | 512 | 4.4 | 150 | 1.5 |
| 25 V - 360 V | 0 V - 180 V | DC | 91 | 32 | 122 | 100 | 75 | 30 |
| | 0 V - 108 V | 16 Hz - 850 Hz | 60 | 12 | 122 | 12 | 75 | 3 |
| | | 850 Hz - 6 kHz | 451 | 12 | 512 | 12 | 150 | 3 |
| 46 V - 650 V | 0 V - 325 V | DC | 92 | 60 | - | - | 75 | 65 |
| | 0 V - 195 V | 16 Hz - 850 Hz | 61 | 22 | - | - | 75 | 6 |
| | | 850 Hz - 6 kHz | 451 | 22 | - | - | 150 | 6 |
| 70 V - 1008 V | 0 V - 504 V | DC | 92 | 100 | 166 | 300 | 75 | 100 |
| | 0 V - 302 V | 16 Hz - 850 Hz | 61 | 33 | 166 | 33 | 75 | 10 |
| | | 850 Hz - 6 kHz | 451 | 33 | 524 | 33 | 150 | 10 |

- [1] Four-wire sense only, for two-wire operation, add an additional voltage = 0.3 Ω x maximum burden current to the accuracy specification.
- [2] For ±1 °C and constant load and connection conditions.
- [3] When Flicker, Fluctuating harmonics, Dip/Swell or Interharmonics are applied, "Open loop" stability specification must be added to the 1-year accuracy specification as described in "Open and Closed Loop Operation".
- [4] These specifications are only applicable if the combined voltage rms output is greater than the range minimum. If the combined output is below the range minimum the output is not specified.
- [5] The maximum value for a single harmonic (2nd to 100th) below 2850 Hz is 30 % of range. See "Amplitude/Frequency Limits" for profile above 2850 Hz.
- [6] tcal = temperature of last calibration.

Voltage Distortion and Noise

| Range and Frequency | | Maximum Harmonic Distortion ^[1] Either: | | | | Non-harmonic Noise Floor (relative to full range) | |
|---------------------|----------------|---|--------|-------------------|---------|---|-------|
| Full Range | Frequency | the largest of | | or the largest of | | 16 Hz - 4 MHz | |
| | | dB | Volts | % Setting | % Range | dB | % |
| 23 V | 16 Hz - 850 Hz | -76 | 480 μV | 0.016 | 0.003 | -66 | 0.05 |
| | 850 Hz - 6 kHz | -52 | 2.4 mV | 0.25 | 0.015 | -66 | 0.05 |
| 45 V | 16 Hz - 850 Hz | -76 | 990 μV | 0.016 | 0.003 | -70 | 0.032 |
| | 850 Hz - 6 kHz | -52 | 5.0 mV | 0.25 | 0.015 | -70 | 0.032 |
| 90 V | 16 Hz - 850 Hz | -76 | 2.3 mV | 0.016 | 0.003 | -72 | 0.025 |
| | 850 Hz - 6 kHz | -52 | 11 mV | 0.25 | 0.015 | -72 | 0.025 |
| 180 V | 16 Hz - 850 Hz | -76 | 5.0 mV | 0.016 | 0.003 | -76 | 0.016 |
| | 850 Hz - 6 kHz | -52 | 25 mV | 0.25 | 0.015 | -76 | 0.016 |
| 360 V | 16 Hz - 850 Hz | -76 | 10 mV | 0.016 | 0.003 | -66 | 0.05 |
| | 850 Hz - 6 kHz | -52 | 50 mV | 0.25 | 0.015 | -66 | 0.05 |
| 650 V | 16 Hz - 850 Hz | -76 | 20 mV | 0.016 | 0.003 | -60 | 0.1 |
| | 850 Hz - 6 kHz | -52 | 100 mV | 0.25 | 0.015 | -60 | 0.1 |
| 1008 V | 16 Hz - 850 Hz | -76 | 30 mV | 0.016 | 0.003 | -60 | 0.1 |
| | 850 Hz - 6 kHz | -52 | 151 mV | 0.25 | 0.015 | -60 | 0.1 |

[1] dB harmonic distortion increases linearly between 850 Hz and 6 kHz.

Current Range Limits

| Full Range (FR) | 0.25 A | 0.5 A | 1 A | 2 A | 5 A | 10 A | 21 A | 50 A | 80 A |
|---|---------|---------|---------|---------|--------|---------|--------|--------|--------|
| Max Peak ^{[1][2]} | 0.353 A | 0.707 A | 1.414 A | 2.828 A | 7.07 A | 14.14 A | 29.7 A | 70.7 | 113 A |
| Maximum Compliance Voltage at FR (V _{pk}) ^{[3][4]} | 14 V | 14 V | 14 V | 14 V | 14 V | 14 V | 12.5 V | 3 V | 2 V |
| Maximum Inductive Load, Hi Bandwidth ^[5] | 300 μH | 300 μH | 300 μH | 300 μH | 300 μH | 30 μH | 30 μH | 30 μH | 30 μH |
| Maximum Inductive Load, Lo Bandwidth ^{[5][6]} | 2 mH | 2 mH | 1 mH | 1 mH | 500 μH | 360 μH | 500 μH | 250 μH | 250 μH |

- [1] These values apply to sinusoidal, distorted and modulated wave-shapes.
- [2] Current harmonic phase angle significantly affects the peak value of a non-sinusoidal waveform.
- [3] Above 450 Hz, the instrument will drive current outputs that develop maximum compliance voltage across the load, but an “adder” to the accuracy specification in “Current DC and Harmonic Amplitude Specifications” and “Current Distortion and Noise” may be required. Calculation of the “adders” is described below.
- [4] Compliance voltage at the end of connecting leads will be reduced by the IR drop in the cables.
- [5] The current output will remain stable with the inductive loads shown but may not be able to drive that inductance at all current/frequency/harmonic combinations due to voltage burden limitations. The inductive load due to connecting cables may be decreased by reducing their loop area, for example, by tying the cables together or shortening the cables.
- [6] In low bandwidth mode maximum frequency is 1.5 kHz.

Load Regulation Specification “adder”

The finite output impedance of the current amplifier causes a “load regulation” effect that must be taken into consideration. Let V_f = the peak voltage developed across the load due to current I_f at frequency F . Let I_{FR} be the maximum current and V_{max} the maximum compliance peak voltage for the range in use.

If $V_f/V_{max} \leq I_f/I_{FR}$ no specification adder is required. Otherwise, the adder is calculated:

$$\text{if } V_f/V_{max} > I_f/I_{FR} \text{ add: } \frac{I_{FR} \times F \times V_f}{20 \times V_{max}} \mu A$$

Example: The output is a 800 Hz, 0.5 A rms sine wave on the 5 A range. The 6100B current specification from “Current Sine Amplitude Specifications” is:

$$139 \text{ ppm} + 120 \mu A = 70 \mu A + 120 \mu A$$

The voltage across the output is 6 V peak and maximum compliance is 14 V, for example, $V_p/V_{max} > I_p/I_{FR}$. The “adder” is:

$$\frac{5 \times 800 \times 6}{20 \times 14} = 85 \mu A$$

The current specification becomes:

$$70 \mu A + 120 \mu A + 85 \mu A = 275 \mu A$$

Current Sine Amplitude Specifications

| Range (Amps) | Frequency | Current (Amps) ^[4] | 6105A & 6106A 1-Year Accuracy, tcal ^[3] ±5 °C ±(ppm of output + μA) | | 6100B & 6101B 1-Year Accuracy, tcal ^[3] ±5 °C ±(ppm of output + μA) | | Open Loop 24-Hour Stability ±(ppm of output + μA) ^{[1][2]} | |
|--------------|----------------|-------------------------------|---|------|---|------|--|-----|
| | | | | | | | | |
| 0.25 A | 45 Hz - 65 Hz | 0.1 A - 0.25 A | 46 | 2.5 | 139 | 6 | 75 | 3 |
| | | 0.25 A | 46 | 1.5 | 130 | 6 | 75 | 3 |
| | 16 Hz - 850 Hz | 0.01 A - 0.1 A | 60 | 5 | 139 | 6 | 75 | 3 |
| | | 0.1 A - 0.25 A | 60 | 5 | 139 | 6 | 75 | 3 |
| 0.5 A | 45 Hz - 65 Hz | 0.2 A - 0.5 A | 46 | 5 | 139 | 12 | 75 | 5 |
| | | 0.5 A | 46 | 3 | 130 | 12 | 75 | 5 |
| | 16 Hz - 850 Hz | 0.05 A - 0.2 A | 61 | 10 | 139 | 12 | 75 | 5 |
| | | 0.2 A - 0.5 A | 61 | 10 | 139 | 12 | 75 | 5 |
| 1 A | 45 Hz - 65 Hz | 0.4 A - 1.0 A | 47 | 10 | 139 | 24 | 75 | 10 |
| | | 1 A | 47 | 6 | 130 | 24 | 75 | 10 |
| | 16 Hz - 850 Hz | 0.1 A - 0.4 A | 61 | 20 | 139 | 24 | 75 | 10 |
| | | 0.4 A - 1 A | 61 | 20 | 139 | 24 | 75 | 10 |
| 2 A | 45 Hz - 65 Hz | 0.8 - 2 A | 46 | 20 | 139 | 48 | 75 | 20 |
| | | 2 A | 46 | 12 | 130 | 48 | 75 | 20 |
| | 16 Hz - 850 Hz | 0.2 A - 0.8 A | 61 | 40 | 139 | 48 | 75 | 20 |
| | | 0.8 A - 2 A | 61 | 40 | 139 | 48 | 75 | 20 |
| 5 A | 45 Hz - 65 Hz | 2 - 5 A | 49 | 50 | 139 | 120 | 75 | 50 |
| | | 5 A | 49 | 30 | 130 | 120 | 75 | 50 |
| | 16 Hz - 850 Hz | 0.5 A - 2 A | 64 | 100 | 139 | 120 | 75 | 50 |
| | | 2 A - 5 A | 64 | 100 | 139 | 120 | 75 | 50 |
| 10 A | 45 Hz - 65 Hz | 4 - 10 A | 49 | 100 | 191 | 240 | 75 | 50 |
| | | 10 A | 49 | 60 | 164 | 240 | 75 | 50 |
| | 16 Hz - 850 Hz | 1 A - 4 A | 65 | 200 | 191 | 240 | 75 | 100 |
| | | 4 A - 10 A | 65 | 200 | 191 | 240 | 75 | 100 |
| 21 A | 45 Hz - 65 Hz | 8 A - 21 A | 49 | 200 | 213 | 720 | 75 | 300 |
| | | 21 A | 49 | 120 | 189 | 720 | 75 | 300 |
| | 16 Hz - 850 Hz | 2 A - 8 A | 69 | 400 | 213 | 720 | 75 | 300 |
| | | 8 A - 21 A | 69 | 400 | 213 | 720 | 75 | 300 |
| 50 A | 45 Hz - 65 Hz | 20 A - 50 A | 49 | 500 | 213 | 1800 | 500 | 750 |
| | | 50 A | 49 | 300 | 189 | 1800 | 500 | 750 |
| | 40 Hz - 850 Hz | 3.2 A - 20 A | 74 | 1000 | 213 | 1800 | 500 | 750 |
| | | 20 A - 50 A | 74 | 1000 | 213 | 1800 | 500 | 750 |

| | | | | | | | | |
|------|-----------------|-------------|-----|------|-----|------|------|------|
| 80 A | 40 Hz - 450 Hz | 8 A - 32 A | 106 | 2800 | 265 | 2800 | 1000 | 1200 |
| | | 32 A - 80 A | 106 | 2800 | 250 | 2800 | 1000 | 1200 |
| | 450 Hz - 850 Hz | 8 A - 32 A | 112 | 2800 | 300 | 2800 | 1000 | 1200 |
| | | 32 A - 80 A | 118 | 2800 | 280 | 2800 | 1000 | 1200 |

- [1] For ± 1 °C and constant load and connection conditions.
- [2] When Flicker, Fluctuating harmonics, Dip/Swell or Interharmonics are applied, "Open loop" stability specification must be added to the 1-year accuracy specification as described in "Open and Closed Loop Operation".
- [3] tcal = temperature of last calibration.
- [4] Output levels less than the range minimum can be set but are not specified.
- [5] Settling time (TS) of 21 A, 50 A, and 80 A ranges depends on rms output as a proportion of full range and can be calculated from: TS = %FR2 x 180 seconds. Settling magnitude will not exceed 50 ppm at FR.

Current DC and Harmonic Amplitude Specifications

| Range | Current ^[4] | Frequency | 6105A & 6106A 1-Year Accuracy, tcal ^[3] ± 5 °C \pm (ppm of output + μ A) | | 6100B & 6101B 1-Year Accuracy, tcal ^[3] ± 5 °C \pm (ppm of output + μ A) | | Open Loop 24-Hour Stability \pm (ppm of output + μ A) ^{[1][2]} | |
|-----------------|------------------------|----------------|--|------|--|------|--|------|
| | | | | | | | | |
| 0.01 A - 0.25 A | 0 A - 0.125 A | DC | 89 | 25 | 139 | 75 | 100 | 11 |
| | 0 A - 0.075 A | 16 Hz - 850 Hz | 61 | 5 | 139 | 6 | 75 | 3 |
| | | 850 Hz - 6 kHz | 400 | 5 | 400 | 6 | 150 | 3 |
| 0.05 A - 0.5 A | 0 A - 0.25 A | DC | 89 | 50 | 139 | 150 | 100 | 22 |
| | 0 A - 0.15 A | 16 Hz - 850 Hz | 61 | 10 | 139 | 12 | 75 | 5 |
| | | 850 Hz - 6 kHz | 400 | 10 | 400 | 12 | 150 | 5 |
| 0.1 A - 1 A | 0 A - 0.5 A | DC | 89 | 100 | 139 | 300 | 100 | 45 |
| | 0 A - 0.3 A | 16 Hz - 850 Hz | 61 | 20 | 139 | 24 | 75 | 10 |
| | | 850 Hz - 6 kHz | 400 | 20 | 400 | 24 | 150 | 10 |
| 0.2 A - 2 A | 0 A - 1 A | DC | 89 | 200 | 139 | 600 | 100 | 90 |
| | 0 A - 0.6 A | 16 Hz - 850 Hz | 61 | 40 | 182 | 48 | 75 | 20 |
| | | 850 Hz - 6 kHz | 400 | 40 | 400 | 48 | 150 | 20 |
| 0.5 A - 5 A | 0 A - 2.5 A | DC | 89 | 500 | 139 | 1500 | 100 | 225 |
| | 0 A - 1.5 A | 16 Hz - 850 Hz | 61 | 100 | 139 | 120 | 75 | 50 |
| | | 850 Hz - 6 kHz | 400 | 100 | 400 | 120 | 150 | 50 |
| 1 A - 10 A | 0 A - 5 A | DC | 89 | 1000 | 191 | 3000 | 100 | 450 |
| | 0 A - 3 A | 16 Hz - 850 Hz | 64 | 200 | 191 | 240 | 75 | 100 |
| | | 850 Hz - 6 kHz | 400 | 200 | 400 | 240 | 150 | 100 |
| 2 A - 21 A | 0 A - 10 A | DC | 90 | 2000 | 191 | 6000 | 100 | 900 |
| | 0 A - 6 A | 16 Hz - 850 Hz | 65 | 400 | 191 | 720 | 75 | 300 |
| | | 850 Hz - 6 kHz | 400 | 400 | 400 | 720 | 150 | 300 |
| 5 A - 50 A | 0 A - 15 A | 16 Hz - 850 Hz | 69 | 1000 | 250 | 2800 | 500 | 750 |
| | | 850 Hz - 3 kHz | 400 | 1000 | 400 | 2800 | 750 | 1200 |
| 8 A - 80 A | 0 A - 24 A | 16 Hz - 850 Hz | 112 | 2000 | 265 | 2800 | 500 | 1200 |
| | | 850 Hz - 3 kHz | 400 | 2000 | 400 | 2800 | 750 | 1200 |

- [1] For ±1 °C and constant load and connection conditions.
- [2] When Flicker, Fluctuating harmonics, Dip/Swell or Interharmonics are applied, "Open loop" stability specification must be added to the 1-year accuracy specification as described in "Open and Closed Loop Operation".
- [3] tcal = temperature of last calibration.
- [4] These specifications are only applicable if the combined voltage rms output is greater than the range minimum. If the combined output is below the range minimum the output is not specified.
- [5] The maximum value for a single harmonic (2nd to 100th) below 2850 Hz is 30 % of range. See "Amplitude/Frequency Limits" for profile above 2850 Hz.

Current Distortion and Noise

| Range and Frequency | | Maximum Harmonic Distortion ^[1] Either: | | | | Non-Harmonic Noise Floor (relative to full range) | |
|---------------------|----------------|---|--------|-------------------|---------|--|-------|
| Full Range | Frequency | the largest of | | or the largest of | | 16 Hz - 4 MHz | |
| | | dB | Amps | % Setting | % Range | dB | % |
| 0.25 A | 16 Hz - 850 Hz | -80 | 7.5 µA | 0.01 | 0.003 | -50 | 0.316 |
| | 850 Hz - 6 kHz | -60 | 25 µA | 0.1 | 0.01 | -50 | 0.316 |
| 0.5 A | 16 Hz - 850 Hz | -80 | 15 µA | 0.01 | 0.003 | -60 | 0.100 |
| | 850 Hz - 6 kHz | -60 | 50 µA | 0.1 | 0.01 | -60 | 0.100 |
| 1 A | 16 Hz - 850 Hz | -80 | 30 µA | 0.01 | 0.003 | -60 | 0.100 |
| | 850 Hz - 6 kHz | -60 | 100 µA | 0.1 | 0.01 | -60 | 0.100 |
| 2 A | 16 Hz - 850 Hz | -80 | 60 µA | 0.01 | 0.003 | -65 | 0.056 |
| | 850 Hz - 6 kHz | -60 | 200 µA | 0.1 | 0.01 | -65 | 0.056 |
| 5 A | 16 Hz - 850 Hz | -80 | 150 µA | 0.01 | 0.003 | -65 | 0.056 |
| | 850 Hz - 6 kHz | -60 | 500 µA | 0.1 | 0.01 | -65 | 0.056 |
| 10 A | 16 Hz - 850 Hz | -80 | 300 µA | 0.01 | 0.003 | -50 | 0.316 |
| | 850 Hz - 6 kHz | -60 | 1.0 mA | 0.1 | 0.01 | -50 | 0.316 |
| 21 A | 16 Hz - 850 Hz | -80 | 600 µA | 0.01 | 0.003 | -50 | 0.316 |
| | 850 Hz - 6 kHz | -60 | 2.0 mA | 0.1 | 0.01 | -50 | 0.316 |
| 50 A | 16 Hz - 850 Hz | -80 | 2.0 mA | 0.01 | 0.003 | -50 | 0.316 |
| | 850 Hz - 6 kHz | -60 | 5.0 mA | 0.1 | 0.01 | -50 | 0.316 |
| 80 A | 16 Hz - 850 Hz | -80 | 2.4 mA | 0.1 | 0.003 | -70 | 0.032 |
| | 850 Hz - 3 kHz | -60 | 8.0 mA | 0.1 | 0.01 | -70 | 0.032 |

[1] dB harmonic distortion increases linearly between 850 Hz and 6 kHz.

Voltage from the Current Terminals

Range Limits and Impedances

| | | | |
|--|---------|---------|---------|
| Full Range (FR) | 0.25 V | 1.5 V | 10 V |
| Max Peak ^{[1][2]} | 0.353 V | 2.121 V | 14.14 V |
| Source Impedance | 1 Ω | 6.67 Ω | 40.02 Ω |
| Minimum load impedance to maintain specification ^[3] | 40 kΩ | 260 kΩ | 1.5 MΩ |

[1] These values apply to sinusoidal, distorted and modulated wave shapes.
 [2] Harmonic phase angle significantly affects the peak value of a non-sinusoidal waveform.
 [3] For a load less than specified, calculate error from parallel combination of source and load impedance.

Sine Specifications

| Range | Frequency | Output Component ^[3] | 6105A & 6106A 1-Year Accuracy, tcal ^[4] ±5 °C ± (ppm of output + µV) | | 6100B & 6101B 1-Year Accuracy, tcal ^[4] ±5 °C ± (ppm of output + µV) | | Open Loop 24-Hour Stability ± (ppm of output + µV) ^{[1][2]} | |
|-----------------|----------------|---------------------------------|--|-----|---|-----|--|-----|
| | | | | | | | | |
| 0.05 V - 0.25 V | 45 Hz - 65 Hz | 0.1 V - 0.25 V | 73 | 10 | 200 | 10 | 90 | 15 |
| | 16 Hz - 850 Hz | 0.05 V - 0.25 V | 82 | 10 | 200 | 10 | 90 | 15 |
| 0.15 V - 1.5 V | 45 Hz - 65 Hz | 0.6 V - 1.5 V | 53 | 50 | 200 | 50 | 75 | 25 |
| | 16 Hz - 850 Hz | 0.6 V - 1.5 V | 66 | 50 | 200 | 50 | 75 | 25 |
| 1 V - 10 V | 45 Hz - 65 Hz | 4 V - 10 V | 52 | 200 | 200 | 200 | 75 | 150 |
| | 16 Hz - 850 Hz | 4 V - 10 V | 66 | 200 | 200 | 200 | 75 | 150 |

[1] For ±1 °C and constant load and connection conditions.
 [2] When Flicker, Fluctuating harmonics, Dip/Swell or Interharmonics are applied, "Open loop" stability specification must be added to the 1-year accuracy specification as described in "Open and Closed Loop Operation".
 [3] Output levels less than the range minimum can be set but are not specified.
 [4] tcal = temperature of last calibration.

DC and Harmonic Amplitude Specifications

| Range | Output ^{[4][5]} | Frequency | 6105A & 6106A 1-Year Accuracy, tcal ^[4] ±5 °C ± (ppm of output + μV) ^[5] | | 6100B & 6101B 1-Year Accuracy, tcal ^[4] ±5 °C ± (ppm of output + μV) ^[5] | | Open Loop Stability ± (ppm of output + μV) per Hour ^{[2][3]} | |
|-----------------|--------------------------|----------------------------------|--|------------|--|------------|---|------------|
| | | | | | | | | |
| 0.05 V - 0.25 V | 0 V - 0.125 V | DC | 91 | 35 | 200 | 35 | 100 | 15 |
| | 0 V - 0.075 V | 16 Hz - 850 Hz 850 Hz - 6 kHz | 82 400 | 10 30 | 200 1000 | 10 30 | 60 150 | 15 15 |
| 0.15 V - 1.5 V | 0 V - 0.75 V | DC | 93 | 210 | 200 | 210 | 100 | 75 |
| | 0 V - 0.45 V | 16 Hz - 850 Hz 850 Hz - 6 kHz | 66 400 | 35 50 | 200 1000 | 50 50 | 50 150 | 25 25 |
| 1 V - 10 V | 0 V - 5 V | DC | 93 | 1000 | 200 | 1000 | 100 | 450 |
| | 0 V - 3 V | 16 Hz - 850 Hz 850 Hz - 6 kHz | 65 400 | 200 300 | 200 1000 | 200 300 | 50 150 | 150 150 |

[1] tcal = temperature of last calibration.
 [2] For ±1 °C and constant load and connection conditions.
 [3] When Flicker, Fluctuating harmonics, Dip/Swell or Interharmonics are applied, "Open loop" stability specification must be added to the 1-year accuracy specification as described in "Open and Closed Loop Operation".
 [4] These specifications are only applicable if the combined voltage rms output is greater than the range minimum. If the combined output is below the range minimum the output is not specified.
 [5] The maximum value for a single harmonic (2nd to 100th) below 2850 Hz is 30 % of range. See "Amplitude/Frequency Limits" for profile above 2850 Hz.

Voltage from Current Terminals, Distortion and Noise

| Range and Frequency | | Maximum Harmonic Distortion ^[1] Either | | | | Non-harmonic Noise Floor (relative to full range) | |
|---------------------|----------------|--|--------|-------------------|---------|--|-------|
| Full Range | Frequency | the largest of | | or the largest of | | 16 Hz - 4 MHz | |
| | | dB | Volts | % Setting | % Range | dB | % |
| 0.25 V | 16 Hz - 850 Hz | -80 | 2.5 μV | 0.010 | 0.001 | -50 | 0.316 |
| | 850 Hz - 6 kHz | -60 | 25 μV | 0.100 | 0.01 | -50 | 0.316 |
| 1.5 V | 16 Hz - 850 Hz | -80 | 15 μV | 0.010 | 0.001 | -60 | 0.100 |
| | 850 Hz - 6 kHz | -60 | 150 μV | 0.100 | 0.01 | -60 | 0.100 |
| 10 V | 16 Hz - 850 Hz | -80 | 100 μV | 0.010 | 0.001 | -60 | 0.100 |
| | 850 Hz - 6 kHz | -60 | 1 mV | 0.100 | 0.01 | -60 | 0.100 |

[1] dB harmonic distortion increases linearly between 50 Hz and 6 kHz.

Current to Voltage Phase Specifications

For Voltage from the Current terminals, use the 0.25 A to 21 A phase specification.

| For All Voltage Ranges (23 V - 1008 V) | | 6105A / 6106A Voltage and Current Components >40 % of Range | | 6100B / 6101B Voltage and Current Components >40 % of Range | | Voltage or Current Component 0.5 % - 40 % of Range ^[5] | |
|---|-----------------|--|---|--|---|---|---|
| Current Range | Frequency | 1-Year Accuracy, tcal ^[4] ±5 °C ^{[1][2]} | Open Loop 24-Hour Stability ^{[2][3]} | 1-Year Accuracy, tcal ^[4] ±5 °C ^{[1][2]} | Open Loop 24-Hour Stability ^{[2][3]} | 1-Year Accuracy, tcal ±5 °C ^{[1][2]} | Open Loop 24-Hour Stability ^{[2][3]} |
| 0.25 A - 21 A | 45 Hz - 65 Hz | 0.0023 ° | 0.0002 ° | 0.003 ° | 0.0002 ° | 0.010 ° | 0.001 ° |
| | 16 Hz - 69 Hz | 0.003 ° | 0.0002 ° | 0.003 ° | 0.0002 ° | 0.010 ° | 0.001 ° |
| | 69 Hz - 180 Hz | 0.007 ° | 0.0002 ° | 0.009 ° | 0.0002 ° | 0.017 ° | 0.002 ° |
| | 180 Hz - 450 Hz | 0.018 ° | 0.0005 ° | 0.023 ° | 0.0005 ° | 0.050 ° | 0.005 ° |
| | 450 Hz - 850 Hz | 0.033 ° | 0.0008 ° | 0.043 ° | 0.0008 ° | 0.070 ° | 0.007 ° |
| | 850 Hz - 3 kHz | 0.115 ° | 0.0010 ° | 0.150 ° | 0.0010 ° | 0.200 ° | 0.020 ° |
| | 3 kHz - 6 kHz | 0.230 ° | 0.0010 ° | 0.300 ° | 0.0010 ° | 0.450 ° | 0.045 ° |
| 21 A - 50 A | 45 Hz - 65 Hz | 0.0023 ° | 0.0002 ° | 0.004 ° | 0.0003 ° | 0.010 ° | 0.001 ° |
| | 16 Hz - 69 Hz | 0.003 ° | 0.0003 ° | 0.004 ° | 0.0003 ° | 0.010 ° | 0.001 ° |
| | 69 Hz - 180 Hz | 0.007 ° | 0.0003 ° | 0.012 ° | 0.0003 ° | 0.017 ° | 0.002 ° |

| | | | | | | | |
|-------------|-----------------|---------|----------|---------|----------|---------|---------|
| | 180 Hz - 450 Hz | 0.018 ° | 0.0005 ° | 0.030 ° | 0.0005 ° | 0.050 ° | 0.005 ° |
| | 450 Hz - 850 Hz | 0.033 ° | 0.0010 ° | 0.050 ° | 0.0010 ° | 0.070 ° | 0.007 ° |
| | 850 Hz - 3 kHz | 0.115 ° | 0.0015 ° | 0.200 ° | 0.0015 ° | 0.200 ° | 0.020 ° |
| | 3 kHz - 6 kHz | 0.230 ° | 0.0025 ° | 0.300 ° | 0.0025 ° | 0.450 ° | 0.045 ° |
| 20 A - 80 A | 45 Hz - 65 Hz | 0.003 ° | 0.0002 ° | 0.004 ° | 0.0005 ° | 0.010 ° | 0.001 ° |
| | 16 Hz - 69 Hz | 0.003 ° | 0.0005 ° | 0.004 ° | 0.0005 ° | 0.016 ° | 0.002 ° |
| | 69 Hz - 180 Hz | 0.008 ° | 0.0005 ° | 0.012 ° | 0.0005 ° | 0.028 ° | 0.003 ° |
| | 180 Hz - 450 Hz | 0.025 ° | 0.0010 ° | 0.030 ° | 0.0010 ° | 0.080 ° | 0.008 ° |
| | 450 Hz - 850 Hz | 0.050 ° | 0.0015 ° | 0.050 ° | 0.0015 ° | 0.100 ° | 0.010 ° |
| | 850 Hz - 3 kHz | 0.250 ° | 0.0025 ° | 0.200 ° | 0.0025 ° | 0.300 ° | 0.030 ° |

[1] Current phase angle errors are relative to the voltage channel of the same phase. For example, L2 current is relative to L2 voltage.
 [2] Phase angle contribution to power accuracy varies with set phase angle see "Power Specifications" below.
 [3] For constant load and connection conditions.
 [4] tcal = temperature of last calibration.
 [5] Phase performance at less than 0.5 % of full range degrades as output components approach the resolution limit of the digital feedback system.

Multi-Phase Operation

Voltage to Voltage Phase Specifications

| For All Voltage Ranges (23 V - 1008 V) | 6105A /6106A Voltage and Current Components >40 % of Range | | 6100B / 6101B Voltage and Current Components >40 % of Range | | Voltage or Current Component 0.5 % - 40 % of Range [5] | |
|--|--|--|---|--|--|------------------------------------|
| | Frequency | 1-Year Accuracy, tcal [4] ±5 °C [1][2] | Stability per hour [2][5] | 1-Year Accuracy, tcal [4] ±5 °C [1][2] | Stability per hour [2][5] | 1-Year Accuracy, tcal ±5 °C [1][2] |
| 16 Hz - 69 Hz | 0.005 ° | 0.0002 ° | 0.005 ° | 0.0002 ° | 0.010 ° | 0.001 ° |
| 69 Hz - 180 Hz | 0.007 ° | 0.0002 ° | 0.007 ° | 0.0002 ° | 0.017 ° | 0.002 ° |
| 180 Hz - 450 Hz | 0.025 ° | 0.0005 ° | 0.025 ° | 0.0005 ° | 0.050 ° | 0.005 ° |
| 450 Hz - 850 Hz | 0.043 ° | 0.0008 ° | 0.050 ° | 0.0008 ° | 0.070 ° | 0.007 ° |
| 850 Hz - 3 kHz | 0.150 ° | 0.0010 ° | 0.170 ° | 0.0010 ° | 0.200 ° | 0.020 ° |
| 3 kHz - 6 kHz | 0.300 ° | 0.0010 ° | 0.350 ° | 0.0015 ° | 0.450 ° | 0.045 ° |

[1] Current phase angle errors are relative to the voltage channel of the same phase. For example, L2 current is relative to L2 voltage.
 [2] Phase angle contribution to power accuracy varies with set phase angle see "Power Specifications" below.
 [3] For constant load and connection conditions.
 [4] tcal = temperature of last calibration.
 [5] Phase performance at less than 0.5 % of full range degrades as output components approach the resolution limit of the digital feedback system.

Energy Specifications

Pulse Inputs

| | |
|------------------------|-------------------------------------|
| Max frequency | 5 MHz (100 Hz for debounced inputs) |
| Min pulse width | 100 ns |
| Max counts per channel | 232-1 (4,294,967,295) |

Pulse and Gate Inputs

| | |
|-------------------------|---|
| Input Low level max | 1 V |
| Input High level min | 3 V |
| Internal pull-up values | 135 Ω and 940 Ω to 4.5 V nominal (Approximately equivalent to 150 Ω/1k Ω to 5 V nominal) |
| Max input voltage | 28 V (clamped @ 30 V approximately) [1] |
| Min input voltage | 0 V (clamped @ -0.5 V approximately) [1] |

Pulse Output

| | |
|--------------------------|---|
| Drive | Open-collector with optional internal 470 Ω pull-up |
| Frequency range | 1 mHz – 5 MHz |
| Frequency accuracy | ± (10 ppm + 100 nHz) |
| External pull-up voltage | 30 V MAX (clamped) ^[1] |
| Sink current | 150 mA MAX |

Gate Output

| | |
|--------------------------|-----------------------------------|
| Drive | Open-drain |
| Internal Pull-up | As Gate-Input |
| External pull-up voltage | 30 V MAX (clamped) ^[1] |
| Sink current | 1 A MAX |

[1] Input/Output protection: 30 V / -0.5V (approximately) clamped, up to 120 mA per signal or 300 mA maximum total all signals.

Accuracy

| | |
|---|--|
| Counted/Timed timing accuracy | ± (10 ppm + 100 ns) ^[2] |
| Gated mode accuracy | ± (10 ppm + 100 ns) ^[2] |
| Packet mode accuracy (ppm) ^[3] | ± (output power (ppm) + 10 ppm + 110,000/Test Duration (secs)) |

[2] Accuracy depends on the period between the application of power (pressing the OPER key) and the gate signal becoming active being greater than 2 seconds.

[3] Specification not valid if “Soft Start” is enabled.

Test Duration

| | |
|-----------------------|------------|
| Maximum test duration | 1000 hours |
|-----------------------|------------|

Power Specifications

The example power specifications below are only valid for rms values greater than 40 % of range for voltage and current and frequency less than 450 Hz. They are not valid when any of: Flicker, Fluctuating harmonics, Dip/Swell or Interharmonics are applied to the voltage or current channel of that 6100B.

6105A and 6106A Sinusoidal Power Accuracy at 45 Hz to 65 Hz; Power Factor 1.0 (ppm)^[1]

| Current | Power with Current at 90 % of Range | | | Power with Current at 50 % of Range | | |
|-------------|-------------------------------------|---------------|-------------------------------------|-------------------------------------|---------------|-------------------------------------|
| | Voltage at 62 % to 70 % of Range | | 650 V & 1008 V Ranges; 70 % to 75 % | Voltage at 7 % to 100 % of Range | | 650 V & 1008 V Ranges; 70 % to 75 % |
| | 23 V to 90 V | 180 V & 360 V | | 23 V to 90 V | 180 V & 360 V | |
| 0 A to 2 A | 62 | 64 | 64 | 72 | 74 | 74 |
| 5 A to 50 A | 65 | 66 | 66 | 74 | 75 | 75 |
| 80 A | 147 | 148 | 148 | 181 | 181 | 181 |

[1] For Energy specification add 1 ppm

Note: 100 ppm = 0.01 %

6105A and 6106A Sinusoidal Power Accuracy at 45 Hz to 65 Hz; Power Factor 0.5 (ppm)^[1]

| Current | Power with Current at 90 % of Range | | | Power with Current at 50 % of Range | | |
|--------------|-------------------------------------|---------------|-------------------------------------|-------------------------------------|---------------|-------------------------------------|
| | Voltage at 62 % to 70 % of Range | | 650 V & 1008 V Ranges; 70 % to 75 % | Voltage at 7 % to 100 % of Range | | 650 V & 1008 V Ranges; 70 % to 75 % |
| | 23 V to 90 V | 180 V & 360 V | | 23 V to 90 V | 180 V & 360 V | |
| 0 A to 5 A | 93 | 94 | 94 | 100 | 101 | 101 |
| 10 A to 50 A | 95 | 96 | 96 | 102 | 102 | 102 |
| 80 A | 163 | 163 | 163 | 194 | 194 | 194 |

[1] For Energy specification add 1 ppm

Note: 100 ppm = 0.01 %

6100B and 6101B Sinusoidal Power Accuracy at 45 Hz to 65 Hz; Power Factor 1.0 (ppm)^[1]

| Current | Power with Current at 90 % of Range | | Power with Current at 50 % of Range | |
|-------------|--|------------------------------|--|------------------------------|
| | 23 V to 360 V Ranges; 62 % to 70 % Range | 1008 V Range; 740 V to 850 V | 23 V to 360 V Ranges; 62 % to 70 % Range | 1008 V Range; 740 V to 850 V |
| 0 A to 2 A | 236 | 239 | 252 | 239 |
| 5 A to 50 A | 236 | 239 | 252 | 239 |
| 80 A | 322 | 339 | 404 | 417 |

[1] For Energy specification add 1 ppm
Note: 100 ppm = 0.01 %

6100B and 6101B Sinusoidal Power Accuracy at 45 Hz to 65 Hz; Power Factor 0.5 (ppm)^[1]

| Current | Power with Current at 90 % of Range | | Power with Current at 50 % of Range | |
|--------------|--|------------------------------|--|------------------------------|
| | 23 V to 360 V Ranges; 62 % to 70 % Range | 1008 V Range; 740 V to 850 V | 23 V to 360 V Ranges; 62 % to 70 % Range | 1008 V Range; 740 V to 850 V |
| 0 A to 5 A | 246 | 249 | 262 | 249 |
| 10 A to 50 A | 246 | 249 | 262 | 249 |
| 80 A | 329 | 346 | 409 | 423 |

[1] For Energy specification add 1 ppm
Note: 100 ppm = 0.01 %

6105A and 6106A Sinusoidal Power Accuracy with 20 % THD at Power Factor 1.0 (ppm)^[1]

Accuracy Depends on Harmonic Order and Amplitudes

| Current | Power with Current at 90 % of Range | | | Power with Current at 50 % of Range | | |
|--------------|-------------------------------------|---------------|-------------------------------------|-------------------------------------|---------------|-------------------------------------|
| | Voltage at 62 % to 70 % of Range | | | Voltage at 7 % to 100 % of Range | | 650 V & 1008 V Ranges; 70 % to 75 % |
| | 23 V to 90 V | 180 V & 360 V | 650 V & 1008 V Ranges; 70 % to 75 % | 23 V to 90 V | 180 V & 360 V | |
| 0 A to 5 A | 97 | 98 | 98 | 103 | 105 | 105 |
| 10 A to 50 A | 98 | 99 | 99 | 105 | 105 | 105 |
| 80 A | 165 | 165 | 165 | 196 | 196 | 196 |

[1] For Energy specification add 1 ppm
Note: 100 ppm = 0.01 %

6100B and 6101B Non-sinusoidal Power Accuracy with 20 % THD at Power Factor 1.0 (ppm)^[1]

Accuracy Depends on Harmonic Order and Amplitudes

| V Range | Power with Current at 90 % of Range | | Power with Current at 50 % of Range | |
|--------------|-------------------------------------|-----------------------------|--|------------------------------|
| Current | 23 V to 360 V; 62 % to 70 % Range | 1008 V Range; 740V to 850 V | 23 V to 360 V Ranges; 62 % to 70 % Range | 1008 V Range; 740 V to 850 V |
| 0 A to 5 A | 242 | 255 | 258 | 255 |
| 10 A to 50 A | 242 | 255 | 258 | 255 |
| 80 A | 326 | 350 | 408 | 426 |

[1] For Energy specification add 1 ppm
Note: 100 ppm = 0.01 %

Voltage and Current Sinusoidal and Rectangular Modulation Flicker Specification

| | |
|-----------------------------------|--|
| Setting range | ±30 % of set value within range values (60 % ΔV/V) |
| Flicker modulation depth accuracy | 0.025 % |

| | | |
|---|--------------------------|--------------------------------------|
| Modulation depth setting resolution | | 0.001 % |
| Shape of modulation envelope | | Rectangular, Square or Sinusoidal |
| Duty cycle (shape = rectangular) | | 0.01 % to 99.99 %; accuracy = ±31 μs |
| Modulation units Either: | Frequency | 0.5 Hz to 40 Hz |
| | or Changes per minute | 1.0 CPM to 4800 CPM |
| Modulating frequency accuracy ^{[1][2]} | | <0.13 % (1 CPM to 4800 CPM) |
| [1] Rectangular modulation accuracy is ±{(10 + 31 x modulating frequency) ppm + 10 μHz} | | |
| [2] Sine modulation accuracy is ±(50 ppm + 10 μHz) | | |

Pst and Pinst Indication Accuracy

P_{st} and P_{inst} values are from IEC 61000-4-15, (amendment 1). Note that P_{st} and P_{inst} indications are only valid for 230 V and 120 V, 50 Hz and 60 Hz. P_{st} values are not valid for the current channel.

| Voltage Setting | P _{st} Indication Accuracy |
|-----------------|-------------------------------------|
| 220 V - 240 V | ±0.25 % |
| 115 V - 125 V | ±0.25 % |

Note that long term flicker (P_{lt}) can be simulated either by a steady P_{st} over a suitable period, or by changing P_{st} and calculating P_{lt} from:

$$P_{lt} = \sqrt[3]{\frac{\sum_{i=1}^N P_{sti}^3}{N}}$$

where P_{sti} (i=1,2,3, ...) are different consecutive readings of P_{st}. See IEC61000-4-15 for details.

Other Flicker Modes

Extended Flicker functions are provided. The accuracy of these signals is better than 1 %:

- Frequency Changes
- Distorted voltage with multiple zero crossings
- Harmonics with side band
- Phase jumps
- Rectangular voltage changes with duty ratio

Fluctuating Harmonic Specifications

Fluctuating harmonics are available on voltage and current outputs. Fluctuating Harmonics are not available on a voltage or current channel if Flicker is already enabled on that channel.

| | |
|--|--|
| Number of harmonics to fluctuate | Any number from 0 to all set harmonics can fluctuate |
| Modulation depth setting range ^[1] | 0 % to 100 % of nominal harmonic voltage |
| Fluctuation accuracy (0 % to ±30 % modulation) | ±0.025 % |
| Modulation depth setting resolution | 0.001 % |
| Shape | Rectangular or Sinusoidal |
| Duty cycle (shape = rectangular) | 0.1 % to 99.99 % |
| Modulating Frequency range | 0.008 Hz to 30 Hz |
| Sine modulating frequency accuracy | ±(50 ppm + 10 μHz) |
| Rectangular modulating frequency accuracy | <1300 ppm ^[2] |
| Modulating Frequency setting resolution | 0.001 Hz |
| [1] Fluctuation accuracy is not specified for modulation depth >±30 %. | |
| [2] Accuracy is ±{(50 + 31 x modulating frequency) ppm + 10 μHz}. | |

Interharmonic Specifications

Interharmonics are available on voltage and current outputs

| | |
|---|---|
| Frequency accuracy | ±500 ppm |
| Amplitude accuracy 16 Hz to <6 kHz | ±1 % |
| Amplitude accuracy >6 kHz | 4 % |
| Maximum value of a single interharmonic | The maximum value for an interharmonic <2850 Hz is 30 % of range. See "Amplitude/Frequency Limits" for profile above 2850 Hz. |
| Frequency range of interharmonic | 16 Hz to 9 kHz |

Dip/Swell Specifications

Although Dips and Swells are primarily voltage phenomena, the 6100B provides the same facility on its current output.

| | |
|--|--|
| Trigger-in requirement | TTL falling edge remaining low for 10 µs |
| Either: Trigger-in delay OR Phase-angle synchronization with respect to channel fundamental frequency zero crossing | 0 to 60 s ±31 µs ±180 ° ±31 µs |
| Dip/Swell Min duration | 1 ms |
| Dip/Swell Max duration | 1 minute |
| Dip Min amplitude | 0 % of the nominal output |
| Swell Max amplitude | The least of full range value and 140 % of the nominal output |
| Ramp up/down period | Settable 100 µs to 30 s |
| Optional repeat with delay | 0 to 60 s ±31 µs |
| Starting level amplitude accuracy | ±0.025 % of level |
| Dip/Swell level amplitude accuracy ^[1] | ±0.25 % of level |
| Trigger out delay | 0 to 60 s ±31 µs from start of dip/swell event |
| Trigger out | TTL falling edge co-incident with end of trigger out delay, remaining low for 10 µs to 31 µs |

[1] Accuracy not specified below 10 % of starting level or below the range minimum value.

Determining Non-sinusoidal Waveform Amplitude Specifications

The rms value of the combination of voltage components is:

$$V_{RMS}^2 = \sum_{i=1}^N V_i^2 \text{ and, assuming symmetrical uncertainties, } u(V)_i, \text{ for each of } V_i,$$

Note that the uncertainties of the components of a 6100B non-sinusoidal voltage (or current) waveform are correlated so must be combined by linear addition.

$$(V_{RMS} + u(V_{RMS}))^2 = \sum_{i=1}^N (V_i + u(V_i))^2$$

$$V_{RMS}^2 + 2V_{RMS}u(V_{RMS}) + u^2(V_{RMS}) =$$

$$V_1^2 + 2V_1 u(V_1) + u^2(V_1) + V_2^2 + 2V_2 u(V_2) + u^2(V_2) \dots V_n^2 + 2V_n u(V_n) + u^2(V_n)$$

$$\text{But } V_{RMS}^2 = \sum_{i=1}^N V_i^2,$$

and, where uncertainties are relatively small (as in the 6100B), $u^2 v_i$ components become negligible. The uncertainty of the combined waveform becomes:

$$2V_{RMS}u(V_{RMS}) = 2V_1 u(V_1) + 2V_2 u(V_2) \dots 2V_n u(V_n)$$

which simplifies to give u_c as the combined uncertainty:

$$u_c(V_{RMS}) = \sum_{i=1}^N c_i u(V_i)$$

$$\text{where } c_i = \frac{V_i}{V_{RMS}} \text{ and is known as the sensitivity coefficient.}$$

Non-sinusoidal Voltage Example

The waveform is a 60 Hz, 110 V rms waveform, from the 168 V range, comprising 10 % 95th harmonic, 30 % 3rd harmonic with the remainder contributed by the fundamental frequency. Using the 6100B voltage uncertainty values in "Voltage and Sine Amplitude Specifications" and "Voltage DC and Harmonic Specifications", determine the 1-year accuracy.

$$3^{\text{rd}} \text{ Harmonic rms voltage} = 0.3 \times 110 = 33 \text{ V}$$

$$95^{\text{th}} \text{ Harmonic rms voltage} = 0.1 \times 110 = 11 \text{ V}$$

$$\text{Fundamental rms voltage} = \sqrt{(110^2 - 33^2 - 11^2)} = 104.3552 \text{ V}$$

Accuracy contribution from the fundamental:

$$112 \text{ ppm of output } +4.4 \text{ mV} = (104.3552 \times 0.000112) + 0.0044 = 0.011688 + 0.0044 = 0.016088 \text{ V}$$

$$\text{Modified by the sensitivity coefficient} = 0.016088 \times 104.3552 \div 110 = 0.015262 \text{ V}$$

Accuracy contribution from the 3rd Harmonic (180 Hz):

$$122 \text{ ppm of } 3^{\text{rd}} \text{ harmonic value } +4.4 \text{ mV} = (0.000122 \times 33) + 0.0044 = 0.008426 \text{ V}$$

$$\text{Modified by the sensitivity coefficient} = 0.008426 \times 33 \div 110 = 0.002528 \text{ V}$$

Accuracy contribution from the 95th Harmonic (5700 Hz):

$$512 \text{ ppm of } 95^{\text{th}} \text{ harmonic value } + 4.4 \text{ mV} = (0.000512 \times 11) + 0.0044 = 0.010032 \text{ V}$$

$$\text{Modified by the sensitivity coefficient} = 0.010032 \times 11 \div 110 = 0.001003 \text{ V}$$

Combining the uncertainties:

$$\text{Total amplitude uncertainty} = 0.015262 + 0.002528 + 0.010032 = 0.018793 \text{ V}$$

$$\text{Voltage Accuracy} = 110 \pm 0.018793 \text{ V}$$

Apparent Power (S) Accuracy Calculations

For the purpose of calculation of apparent power (S) for non-sinusoidal outputs the following equations are used:

$$S = \sqrt{\sum_n V_n^2 \sum_n I_n^2} \text{ VA}$$

To calculate the accuracy of apparent power (S), the amplitude accuracy specifications of voltage harmonic components must be combined as described in "Determining Non-Sinusoidal Waveform Amplitude Specifications" above. Current components are combined using the same method. As apparent power is the product of two different quantities, uncertainties are conveniently combined using relative values. Note that 6100B voltage and current components are generated independently and are therefore largely uncorrelated.

$$\text{As } S^2 = V_{RMS}^2 \cdot I_{RMS}^2 ;$$

$$\frac{u_c^2(S)}{S^2} = \left[\frac{u(V_{RMS})}{V_{RMS}} \right]^2 + \left[\frac{u(I_{RMS})}{I_{RMS}} \right]^2$$

where $u_c(S)$ is the combined uncertainty of the apparent Power,

$u(V_{RMS})$ is the uncertainty of the rms voltage and

$u(I_{RMS})$ is the uncertainty of the rms current.

Apparent Power Example

Voltage channel fundamental frequency output is 109 V on the 1 V range at 60 Hz. A 15 V 3rd harmonic has been added. The current channel output is 7 A at 60 Hz on the 10 A range with 3rd and 5th harmonics at 0.7 A and 0.3 A respectively. Phase angles are not relevant to the calculation of apparent power. Voltage uncertainty values are given in "Voltage and Sine Amplitude Specifications" and "Voltage DC and Harmonic Specifications", current uncertainty values are given in "Current Sine Amplitude Specifications" and "Current DC and Harmonic Amplitude Specifications". The accuracy used is that of the 6100B.

$$\text{The voltage rms value is } \sqrt{109^2 + 15^2} = 110.02727 \text{ V}$$

Accuracy contribution from the voltage fundamental:

$$112 \text{ ppm of } 109 \text{ V} + 4.4 \text{ mV} = (109 \times 0.000112) + 0.0044 = 0.012208 + 0.0044 = 0.016608 \text{ V}$$

$$\text{Modified by the sensitivity coefficient} = 0.016608 \times 109 \div 110.02727 = 0.016453 \text{ V}$$

Accuracy contribution from the voltage 3rd harmonic:

$$122 \text{ ppm of } 15 \text{ V} + 4.4 \text{ mV} = (15 \times 0.000122) + 0.0044 = 0.01830 + 0.0044 = 0.006230 \text{ V}$$

$$\text{Modified by the sensitivity coefficient} = 0.006230 \times 15 \div 110.02727 = 0.000849 \text{ V}$$

Combined voltage uncertainty:

$$\frac{u(V_{RMS})}{V_{RMS}} = \frac{0.016453 + 0.000849}{110.02727} = 0.000157 \text{ (or 157 ppm).}$$

The current rms value is $\sqrt{7^2 + 0.7^2 + 0.3^2} = 7.041307$

Accuracy contribution from the current fundamental:

$$164 \text{ ppm of } 7 \text{ A} + 240 \text{ } \mu\text{A} = (7 \times 0.000164) + 0.000240 = 0.001148 + 0.000240 = 0.001388$$

$$\text{Modified by the sensitivity coefficient} = 0.001388 \times 7 \div 7.041307 = 0.001380 \text{ A}$$

Accuracy contribution from the current 3rd harmonic:

$$191 \text{ ppm of } 0.7 \text{ A} + 240 \text{ } \mu\text{A} = (0.7 \times 0.000191) + 0.000240 = 0.000134 + 0.000240 = 0.000374$$

$$\text{Modified by the sensitivity coefficient} = 0.000374 \times 0.7 \div 7.041307 = 0.000037 \text{ A}$$

Accuracy contribution from the current 5th harmonic:

$$191 \text{ ppm of } 0.3 \text{ A} + 240 \text{ } \mu\text{A} = (0.3 \times 0.000191) + 0.000240 = 0.000058 + 0.000240 = 0.000297$$

$$\text{Modified by the sensitivity coefficient} = 0.000297 \times 0.3 \div 7.041307 = 0.000013 \text{ A}$$

Combined current uncertainty:

$$\frac{u(I_{RMS})}{I_{RMS}} = \frac{0.001388 + 0.000037 + 0.000013}{7.041307} = 0.000204 \text{ (or 204 ppm).}$$

$$\text{Now, } S^2 = V_{RMS}^2 \cdot I_{RMS}^2 = 110.02727 \times 7.041307 = 774.7358 \text{ VA}$$

Apparent Power uncertainty:

$$\frac{u(S)}{S} = \sqrt{\left[\frac{u(V_{RMS})}{V_{RMS}}\right]^2 + \left[\frac{u(I_{RMS})}{I_{RMS}}\right]^2} = \sqrt{0.000157^2 + 0.000204^2} = 0.0002574$$

giving:

$$u_c(S) = 0.0002574 \times 774.735748 = 0.1994 \text{ VA}$$

$$\underline{\text{Apparent Power Accuracy} = 774.7358 \pm 0.1994 \text{ VA}}$$

Power (P) Accuracy Calculations

Real power is the sum of the products of volt/current/phase-angle at each harmonic frequency.

$$P = \sum V_n I_n \cos \Phi_n \text{ Watts}$$

where n is the harmonic order of the components.

Calculation of power accuracy uses the same techniques shown previously. The uncorrelated uncertainty components of voltage, current and phase are combined using root sum of squares for each frequency.

$$\frac{u^2(P_f)}{P_f^2} = \left[\frac{u(V_f)}{V_f}\right]^2 + \left[\frac{u(I_f)}{I_f}\right]^2 + [u(\text{phase}_f)]^2$$

where $u(x)$ is the uncertainty of the component x and phase is the phase angle between the current and voltage at frequency f . It is easiest to express each of these contributions as ppm.

The contribution of phase angle accuracy varies with the set phase angle as shown below.

$$u(\text{phase}) = 1 - \frac{\cos(\Phi + u(\phi))}{\cos \Phi}$$

where Φ is the set phase angle and $u(\phi)$ is the phase accuracy.

The power uncertainties for each frequency, modified by the appropriate sensitivity coefficient c_i , are then linearly summed to give the combined uncertainty u_c (linearly summed because voltage components are correlated, as are those of current and phase).

$$u_c(P) = \sum_{i=1}^N c_i u(P_i)$$

Power Example

Voltage channel output is 109 V on the 180 V range at 60 Hz with 3rd harmonic at 15 V. The voltage 3rd harmonic has 0° phase angle relative to the voltage fundamental.

The current channel output is 7 A on the 10 A range at 60 Hz with 3rd and 5th harmonics at 0.7 A and 0.3 A respectively. The current fundamental phase angle is 12° relative to the voltage fundamental. The current 3rd harmonic has a phase angle of +25° relative to the current fundamental, for example, the phase angle between the 3rd current harmonic and the 3rd voltage harmonic is 25° + (3 x 12°) = 61°. As the current 5th harmonic is not matched by a voltage 5th harmonic, there is no 5th harmonic power contribution.

Voltage uncertainty values are given in "Voltage and Sine Amplitude Specifications" and "Voltage DC and Harmonic Specifications", current uncertainty values are given in "Current Sine Amplitude Specifications" and "Current DC and Harmonic Amplitude Specifications". Phase uncertainty values are given in "Current to Voltage Phase Specifications". The accuracy used is that of the 6100B.

Converting all values to ppm, accuracy contribution at the fundamental frequency

$$u(V_1) = 112 \text{ ppm} + \frac{0.0044 \text{ V} \times 10^6}{109 \text{ V}} = 152 \text{ ppm}$$

$$u(I_1) = 164 \text{ ppm} + \frac{0.00024 \text{ A} \times 10^6}{7 \text{ A}} = 198 \text{ ppm}$$

$$u(\text{phase}_1) = \left(1 - \frac{\cos(12 + 0.003)}{\cos(12)} \right) \times 1e6 = 11 \text{ ppm}$$

Combined accuracy for the fundamental frequency components:

$$u(P_1) = \sqrt{152^2 + 198^2 + 11^2} = 250 \text{ ppm}$$

Power in the fundamental frequency:

$$P_1 = V_1 I_1 \cos \Phi_1 = 109 \times 7 \times 0.9781476 = 746.3266 \text{ Watts so:}$$

$$u(P_1) = 250 \times 10^{-6} \times 746.3266 = 0.1866 \text{ Watts}$$

Accuracy contribution for the 3rd harmonic

$$u(V_3) = 122 \text{ ppm} + \frac{0.0044 \text{ V} \times 10^6}{15 \text{ V}} = 415 \text{ ppm}$$

$$u(I_3) = 191 \text{ ppm} + \frac{0.00024 \text{ A} \times 10^6}{0.7 \text{ A}} = 534 \text{ ppm}$$

$$u(\text{phase}_3) = \left(1 - \frac{\cos(61 + 0.009)}{\cos(61)} \right) \times 1e6 = 283 \text{ ppm}$$

Combined accuracy for the 3rd harmonic components

$$u(P_3) = \sqrt{415^2 + 534^2 + 283^2} = 733 \text{ ppm}$$

Power in the 3rd harmonic components:

$$P_3 = V_3 I_3 \cos \Phi_3 = 15 \times 0.7 \times 0.484810 = 5.0905 \text{ Watts so:}$$

$$u(P_3) = 733 \times 10^{-6} \times 5.0905 = 0.003732 \text{ Watts}$$

Total power $P = P_1 + P_3 = 746.3266 + 5.0905 = 751.4171$ Watts

From:

$$u_c(P) = \sum_{i=1}^N c_i \cdot u(P_i)$$

$$u_c(P) = \frac{746.3266}{751.4171} \times 0.1866 + \frac{5.0905}{751.4171} \times 0.003731 = 0.1854 \text{ Watts}$$

Power Accuracy = 751.4171 ± 0.1854 Watts

Reactive Power Calculation Methods

Under pure sinusoidal conditions, Apparent Power (S), Power (P) and Reactive power (Q) are related by:

$S^2 = P^2 + Q^2$. This relationship is known as the Power Triangle. When either the voltage or current waveform is not sinusoidal, the power triangle is not satisfied by this equation. This has led to various attempts to better define Reactive Power (Q) but no single definition has been agreed. The difficulty is that Q is used for a number of different calculations including transmission line efficiency and voltage line drop. The 6100B allows users to select the definition that best meets their needs. The following methods are supported:

| | |
|--------------------|------------------------|
| Budeanu | Fryze |
| Kusters and Moore | Shepherd and Zakikhani |
| Sharon / Czarnecki | IEEE working group |

Because of the complexity of the subject, definition of the methods listed is beyond the scope of this document. References to relevant documentation are provided at the reference

Reactive Power

For reactive Power (Q) calculate $u \phi(Q)$ from

$$u(Q) = (1 - \frac{\sin(\Phi + u(\phi))}{\sin(\Phi)})$$

The method used for calculation of reactive power in non-sinusoidal conditions is user selectable.

References

6100B reactive power calculations are guided by the published work of Dr. Stefan Svensson:

Svensson, S., (1999), *Power Measurement Techniques for Nonsinusoidal Conditions*, Chalmers

Other pertinent papers are:

Budeanu, C., (1927), "Reactive and fictitious powers", *Rumanian National Institute*, No.2.

Czarnecki, L. S., (1885), "Considerations on the reactive power in nonsinusoidal situations", *IEEE Trans. on Inst. and Meas.*, Vol. 34, No. 3, pp399-404, Sept.

Czarnecki, L. S., (1987), "What is wrong with the Budeanu concept of reactive and distortion power and why it should be abandoned", *IEEE Trans. on Inst. and Meas.*, Vol. 36, No. 3, pp834-837, Sept

Filipski, P., (1980), "A new approach to reactive current and reactive power measurements in nonsinusoidal systems", *IEEE Trans. on Inst. and Meas.*, Vol. 29, No. 4, pp423-426, Dec.

Fryze, S., (1932), "Wirk- Blind- und Scheinleistung in elektrischen Stromkreisen mit nichtsinusformigen Verlauf von Strom und Spannung", *Elektrotechnische Zeitschrift*, No25, pp 596-99, 625-627, 700-702.

Kusters, N. L. and Moore, W. J. M., (1980), "On the definition of reactive power under nonsinusoidal conditions", *IEEE Transaction on Power Apparatus and Systems*, Vol PAS-99, No. 5, pp1845-1854, Sept/Oct.

Sharon, D., (1973), "Reactive power definition and power factor improvement in non-linear systems", *PROC. IEE*, Vol. 120, No. 6, pp 704-706, July.

Shepherd, W. and Zakikhani, P., (1972), "Suggested definition of reactive power for nonsinusoidal systems", *PROC. IEE*, Vol. 119, No. 9, pp 1361-1362, Sept.

IEC, Reactive power in nonsinusoidal situations, Report TC 25/wg7.

Ordering information

| 6105A model numbers | | | | |
|----------------------|------------------|-----------------|-----------------|-----------------|
| Options | Number of phases | | | |
| | 1 | 2 | 3 | 4 |
| Auxiliary unit | 6106A | | | |
| Auxiliary unit + 50A | 6106A/50A | | | |
| Auxiliary unit + 80A | 6106A/80A | | | |
| Standard | 6105A | 6125A | 6135A | 6145A |
| 50A | 6105A/50A | 6125A/50A | 6135A/50A | 6145A/50A |
| 80A | 6105A/80A | 6125A/80A | 6135A/80A | 6145A/80A |
| Energy | 6105A/E | 6125A/E | 6135A/E | 6145A/E |
| CLK | 6105A/CLK | 6125A/CLK | 6135A/CLK | 6145A/CLK |
| 50A + CLK | 6105A/50A/CLK | 6125A/50A/CLK | 6135A/50A/CLK | 6145A/50A/CLK |
| 80A + CLK | 6105A/80A/CLK | 6125A/80A/CLK | 6135A/80A/CLK | 6145A/80A/CLK |
| Energy + CLK | 6105A/E/CLK | 6125A/E/CLK | 6135A/E/CLK | 6145A/E/CLK |
| Energy + 50A | 6105A/E/50A | 6125A/E/50A | 6135A/E/50A | 6145A/E/50A |
| Energy + 50A + CLK | 6105A/50A/E/CLK | 6125A/50A/E/CLK | 6135A/50A/E/CLK | 6145A/50A/E/CLK |
| Energy + 80A | 6105A/E/80A | 6125A/E/80A | 6135A/E/80A | 6145A/E/80A |
| Energy + 80A + CLK | 6105A/80A/E/CLK | 6125A/80A/E/CLK | 6135A/80A/E/CLK | 6145A/80A/E/CLK |

| 6100B model numbers | | | | |
|----------------------|------------------|-----------------|-----------------|-----------------|
| Options | Number of phases | | | |
| | 1 | 2 | 3 | 4 |
| Auxiliary unit | 6101B | | | |
| Auxiliary unit + 50A | 6101B/50A | | | |
| Auxiliary unit + 80A | 6101B/80A | | | |
| Standard | 6100B | 6120B | 6130B | 6140B |
| 50A | 6100B/50A | 6120B/50A | 6130B/50A | 6140B/50A |
| 80A | 6100B/80A | 6120B/80A | 6130B/80A | 6140B/80A |
| Energy | 6100B/E | 6120B/E | 6130B/E | 6140B/E |
| CLK | 6100B/CLK | 6120B/CLK | 6130B/CLK | 6140B/CLK |
| 50A + CLK | 6100B/50A/CLK | 6120B/50A/CLK | 6130B/50A/CLK | 6140B/50A/CLK |
| 80A + CLK | 6100B/80A/CLK | 6120B/80A/CLK | 6130B/80A/CLK | 6140B/80A/CLK |
| Energy + CLK | 6100B/E/CLK | 6120B/E/CLK | 6130B/E/CLK | 6140B/E/CLK |
| Energy + 50A | 6100B/E/50A | 6120B/E/50A | 6130B/E/50A | 6140B/E/50A |
| Energy + 50A + CLK | 6100B/50A/E/CLK | 6120B/50A/E/CLK | 6130B/50A/E/CLK | 6140B/50A/E/CLK |
| Energy + 80A | 6100B/E/80A | 6120B/E/80A | 6130B/E/80A | 6140B/E/80A |

| Accessories | |
|--------------|--|
| 6100/CASE | 6100A/6101A Transit case |
| 6100/CASE/80 | 6100A/6101A Transit case with 80A Option |
| Y6100 | 6100A/6101A Rack Mount Kit |
| 6100-RMK | Rack Mount Ears only |
| 6100/LEAD | Spare Lead set |
| 610ORM-1H/V | Energy Optical Sensor |
| 610ORM-DS/SM | Energy Disc Sensor |

Fluke Calibration. Precision, performance, confidence.™

| | | | | | |
|------------|----|-------------|----------|------|----------|
| Electrical | RF | Temperature | Pressure | Flow | Software |
|------------|----|-------------|----------|------|----------|

Fluke Calibration
PO Box 9090,
Everett, WA 98206 U.S.A.

Fluke Europe B.V.
PO Box 1186, 5602 BD
Eindhoven, The Netherlands
Web access: <http://www.flukecal.eu>

For more information call:
In the U.S.A. (877) 355-3225 or Fax (425) 446-5716
In Europe/M-East/Africa +31 (0) 40 2675 200 or Fax +31 (0) 40 2675 222
In Canada (800)-36-FLUKE or Fax (905) 890-6866
From other countries +1 (425) 446-6110 or Fax +1 (425) 446-5716
Web access: <http://www.flukecal.com>

©2002-2016 Fluke Calibration. Specifications subject to change without notice.
Printed in U.S.A. 9/2016 2029502i-en

Modification of this document is not permitted without written permission from Fluke Calibration.