

SM4628 DATA SHEET

N Female to C Male Adapter

Type N female to type C male adapter part number SM4628 from Fairview Microwave is in-stock and ships same day. This Fairview type N to type C adapter has a female to male gender configuration. SM4628 type N female to type C male adapter operates to 11 GHz. The Fairview Microwave RF adapter provides excellent VSWR of 1.25:1 maximum.

RF adapters can be used to enable connections between two connector types that would otherwise not mate. Certain RF adapter configurations can also be used to protect connectors on expensive equipment where the number of connect and disconnect cycles is high. An RF, microwave, or millimeter wave adapter is connected to the equipment and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Fairview Microwave also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications

Description	Min	Тур	Max	Units	
Frequency Range	DC		11	GHz	
VSWR			1.25:1		

Electrical Specification Notes: Values at 25°C, sea level.

Mechanical Specifications

Size	
Length	
Width	

Weight

1.54 in [39.12 mm] 0.75 in [19.05 mm] 0.10097 lbs [45.8 g]

Description	Connector 1	Connector 2
Туре	N Female	C Male
Polarity	Standard	Standard
Interface Specification	MIL-STD-348	MIL-STD-348



Configuration:

- N Female Connector 1
- C Male Connector 2
- 50 Ohm
- Straight Body Geometry

Features:

- VSWR of 1.25:1 max up to 11 GHz
- Type N interface meets MIL-STD-348
- Type C interface meets MIL-STD-348
- Contact plating according to QQ-S-365
- · Silver Plated Contact

Applications:

- Enables Between Series Connections
- General Purpose Test

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013 Tel: 1-800-715-4396 / (972) 649-6678

Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





Material Specifications

Description	Connector 1		Connector 2	Connector 2	
Туре	N Female		C Male		
Contact Material	Beryllium Copper		Brass	Brass	
Contact Plating	Silver		Silver	Silver	
Contact Plating Spec.	QQ-S-365		QQ-S-365		
Insulation Material	PTFE		PTFE	PTFE	
Outer Contact Material	Brass	Brass			
Outer Contact Plating	Nickel				
Outer Contact Plating Spec.	QQ-N-29	QQ-N-290			
Body Material			Brass		
Body Plating			Nickel		
Body Plating Spec.			QQ-N-290		
Coupling Nut Material			Brass		
Coupling Nut Plating			Nickel		
Coupling Nut Plating Spec.			QQ-N-290		

Environmental Specifications

Temperature

Operating Range

-65 to +165 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

N Female to C Male Adapter from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: N Female to C Male Adapter SM4628

URL: https://www.fairviewmicrowave.com/n-female-c-male-adapter-sm4628-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.


1130 Junction Dr. #100 Allen, TX 75013 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689

Copyright © 2016

REV 1.1 Page 2 of 3





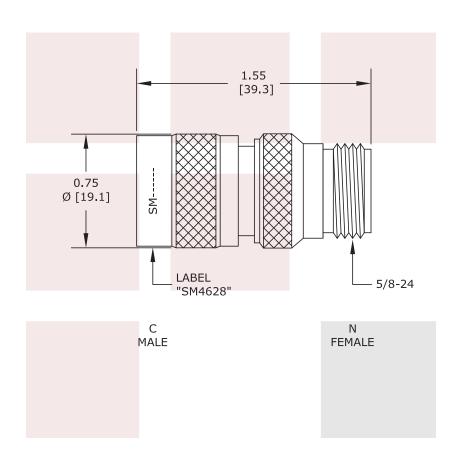

STANDARD TOLERANCES

.X ±0.2 .XX ±0.1 .XXX ±0.05

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].					
N Female to C Male Adapter	DWG NO SM4628			CAGE CODE 3FKR5		
	CAD FILE 093016	SHEET	SCALE	N/A	SIZE A	2233