

**Anritsu** envision : ensure

# Spectrum Master™

## Ultraportable Spectrum Analyzer

### MS2760A

9 kHz to 32 GHz, 44 GHz, 50 GHz, 70 GHz, 90 GHz, 110 GHz



**Introduction**


From Anritsu, the inventor of the handheld spectrum analyzer first introduced in 1999, we are proud to introduce our first generation MS2760A Spectrum Master – Ultraportable Spectrum Analyzer. By utilizing Anritsu’s patented shockline nonlinear transmission line (NLTL) technology, the MS2760A shatters the cost, size, and performance barriers associated with traditional large form-factor instruments to more efficiently advance technology development. The MS2760A is truly pocket sized, but big on performance with class-leading dynamic range, sweep speed, and amplitude accuracy.

Its ultraportable size enables direct connect to almost any DUT, eliminating the need for lossy, expensive cables or antennas. The MS2760A is the world’s first handheld millimeter-wave spectrum analyzer to provide continuous coverage from 9 kHz up to 110 GHz, positioning it perfectly for growing millimeter-wave applications like 5G, 802.11ad, satellite communications, automotive radar, and more. The MS2760A is USB-powered and controlled from a Windows-based PC, laptop, or tablet, making it uniquely flexible for use in the lab, on the manufacturing floor, or in the field.

**Spectrum Analyzer Highlights**

- Measure: Channel Power, Adjacent Channel Power, Occupied Bandwidth
- Spectrum and Spectrogram Displays
- External 10 MHz Frequency Reference
- External TTL Trigger Input
- Resolution Bandwidth (RBW): 1 Hz to 3 MHz
- Phase Noise: -116 dBc/Hz @ 1 GHz, typical
- Up to Six Spectrum Traces and Spectrogram Cursors, Three Trace Detectors, 12 Markers
- Dynamic Range: > 103 dB from 6.15 GHz up to 110 GHz
- DANL: as low as -136 dBm

**Dimensions**

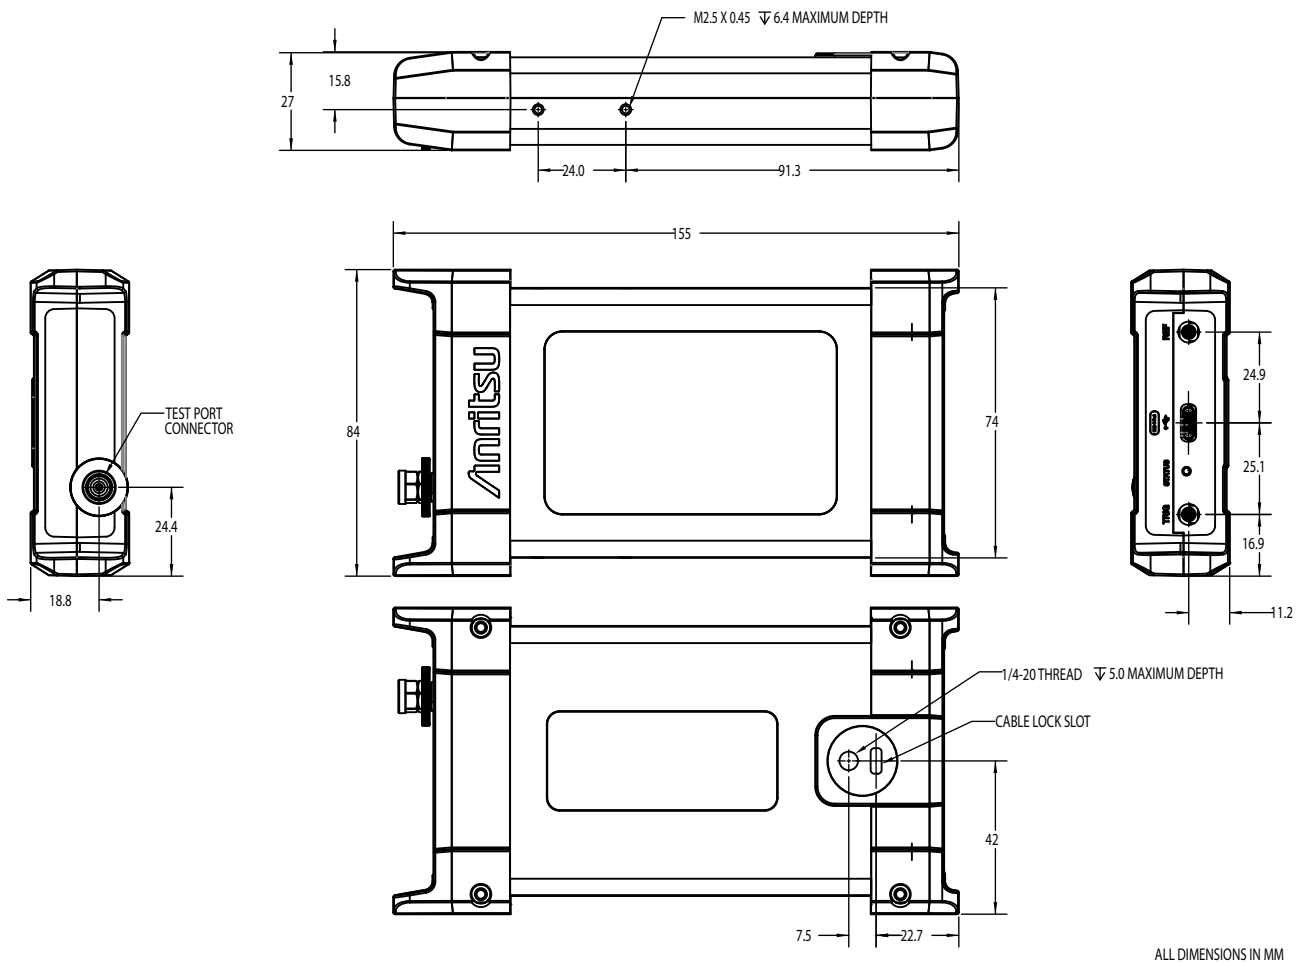

**US Patents** The MS2760A is protected by the following US patents: 6,894,581; 7,683,633; 8,417,189; 9,287,604

**Table of Contents**

Dimensions.....2

Definitions.....3

Spectrum Analyzer .....4

    Smart Measurements .....4

    Setup Parameters .....4

    Sweep Functions .....4

    Trace Functions .....4

    Spectrogram.....4

    Marker Functions.....4

    Limit Line Functions .....4

    Frequency.....5

    Bandwidth.....5

    Amplitude Ranges.....5

    External Trigger.....5

    Image Response.....5

    Spectral Purity – SSB Phase Noise.....6

    Spurs.....6

    Amplitude Accuracy.....6

    Displayed Average Noise Level (DANL).....6

    Third-Order Intercept (TOI).....6

    Second Harmonic Distortion.....6

    Input Match.....6

General Specifications .....7

    Setup Parameters .....7

    Connectors.....7

    Computer Requirement.....7

    Regulatory Compliance.....7

    Environmental.....7

    Warranty.....7

    Size and Weight.....7

Ordering Information.....8

    Models and Options.....8

    Standard Accessories.....8

    Manuals.....8

Optional Accessories.....9

    Coaxial Adapters.....9

    Precision Fixed Attenuators.....9

    Precision Waveguide Coaxial Adapters.....9

    Waveguide to Coaxial End Launch Adapters.....10

    Directional Horn Antennas.....10

    Test Port Cables (Armored, Semi-rigid).....10

    USB Cable Extender.....10

**Definitions**

All specifications and characteristics apply to Revision 1 instruments under the following conditions, unless otherwise stated:

- After 5 minutes of warm-up time, where the instrument is left in the ON state
- When using the internal reference signal

Typical Specifications Typical specifications are not tested and not warranted. They are generally representative of characteristic performance. The following models have typical specifications in the following ranges:  
 MS2760A-0044: 40 GHz to 44 GHz typical.  
 MS2760A-0070: 67 GHz to 70 GHz typical.

Calibration Cycle Recommended calibration cycle is 12 months.

Time Base Error Input Frequency × Frequency Reference Error

All specifications subject to change without notice. For the most current data sheet, please visit [www.anritsu.com](http://www.anritsu.com)



## Spectrum Analyzer

### Smart Measurements

Channel Power	Measures the total power in a specified bandwidth
Occupied Bandwidth	Measures 99 % to 1 % power channel of a signal
Adjacent Channel Power	Measures channel power of the adjacent channel

### Setup Parameters

Frequency	Center/Start/Stop, Frequency Step, Frequency Offset
Span	Span, Span Up/Down, Full Span, Last Span, Zero Span
Bandwidth	RBW, Auto RBW, VBW, Auto VBW, VBW/RBW, Span/RBW, VBW Log/Lin Averaging
Amplitude	Reference Level, Scale / Division, Ref Level Offset, IF Gain

### Sweep Functions

Sweep	Single/Continuous, Restart, Sweep Once, Sweep to N
Zero Span Sweep Time	0.02 ms to 6000 ms
Minimum Capture Time	0 s to 10 s

### Trace Functions

Traces	Up to six traces
Trace Type	Clear / Write, Trace Average, Max Hold, Min Hold, Rolling Average, Rolling Max Hold, Rolling Min Hold
Trace Mode	Active, Hold / View, Blank
Detector Type per Trace	Peak, RMS / Avg, Negative

### Spectrogram

Spectrogram Position	Selectable from Top, Bottom, or Full Screen
Trace Time Cursor	Up to six Time Cursors to recall historical trace data by trace number or time
Color Setup	Set Color Top/Bottom Range, Set Color Reference Hue

### Marker Functions

Markers	Up to 12 Markers
Marker Mode	Normal, Delta, Fixed
Delta Marker	Relative to any Normal or Fixed Marker
Marker Function	Up to six Noise Markers
Marker Trace	Assign Marker to any Trace
Peak Search	Peak Search, Next Peak, Next Peak Left, Next Peak Right, Next Point Left, Next Point Right
Peak Search Setup	Peak Threshold, Peak Excursion
Marker →	Mkr → Center, Mkr → Ref Level

### Limit Line Functions

Limit Setup	Upper/Lower, Limit On/Off, Limit Alarm On/Off, Set Default Limit Line, Absolute/Relative, Mirror On/Off
Limit Line Edit	Frequency, Amplitude, Add Point, Add Vertical, Delete Point, Next Point Left/Right
Limit Line Move	To Current Center Frequency, By dB or Hz, To Marker 1, Offset from Marker 1
Limit Line Envelope	Create Envelope, Update Envelope, Points (41 max), Offset, Shape Square/Slope


**Spectrum Analyzer** (continued)

<b>Frequency</b>	Frequency Range	(usable to 0 Hz)
	MS2760A-0032	9 kHz to 32 GHz
	MS2760A-0044	9 kHz to 44 GHz
	MS2760A-0050	9 kHz to 50 GHz
	MS2760A-0070	9 kHz to 70 GHz
	MS2760A-0090	9 kHz to 90 GHz
	MS2760A-0110	9 kHz to 110 GHz
	Tuning Resolution	1 Hz
Internal 10 MHz Frequency Reference	Aging: $\pm 1.0$ ppm/year Accuracy: $\pm 0.2$ ppm ( $25\text{ }^{\circ}\text{C} \pm 25\text{ }^{\circ}\text{C}$ ) + aging	
	Frequency Span	10 Hz to maximum frequency range of instrument

**Bandwidth**

Resolution Bandwidth (RBW)	1 Hz to 3 MHz
Video Bandwidth (VBW)	1 Hz to 3 MHz
VBW/Average Type	Linear / Log
RBW Filters	Flat Top, Nuttall

**Amplitude Ranges**

Dynamic Range	> 103 dB typical at 70 GHz, 2/3 (TOI - DANL) in 1 Hz RBW
Display Range	1 dB to 15 dB/div in 1 dB steps, ten divisions displayed
Measurement Range	DANL to +10 dBm
Reference Level Range	-120 dBm to +30 dBm
Amplitude Units	dBm
Maximum Safe Level Input	+30 dBm CW, $\pm 10$ VDC

**External Trigger**

Source	External, Video, Free Run, Auto Trigger (0 s to 5 s)
Delay	0 ms to 1670 ms; -60 s (up to sweep time) in zero span and video or external trigger
Holdoff	0 ms to 5000 ms
Slope	Rising, Falling, Both
Hysteresis	0 dB to 200 dB

**Image Response** The MS2760A employs unique software algorithms to minimize image responses that may appear under certain use cases when wideband modulated and multi-tone signals are being analyzed. Image rejection can be set to use upper or lower mixing products (no image rejection), or both for normal image rejection.



## Spectrum Analyzer (continued)

**Spectral Purity – SSB Phase Noise** (dBc/Hz, 20 °C to 30 °C)

Offset	1 GHz (typical)	6 GHz (maximum)	6 GHz (typical)	30 GHz (maximum)	30 GHz (typical)	60 GHz (maximum)	60 GHz (typical)
1 kHz	-100	-80	-88	-66	-74	-60	-69
10 kHz	-110	-95	-104	-81	-88	-75	-84
100 kHz	-116	-95	-104	-81	-88	-75	-84

**Spurs**

Residual Spurs	maximum (dBm)	typical (dBm)
10 MHz to 70 GHz	-85	-95
> 70 MHz to 90 GHz	-84	-95
> 90 MHz to 110 GHz	-81	-95
Input-related Spurious (-10 dBm CW input)		
28 MHz	-50 dBc @ 70 MHz	
35 MHz	-50 dBc @ 133 MHz	
770 MHz	-35 dBc @ 3430 MHz, 4970 MHz, 7630 MHz	
910 MHz	-35 dBc @ 4970 MHz, 6790 MHz	
All other input frequencies	<-60 dBc	
Zero Span	No image rejection is applied to the sweep while in zero span, therefore spurious impact may be different.	

**Amplitude Accuracy**

Frequency	20 °C to 30 °C (after 30 minute warm-up)		0 °C to 50 °C (after 60 minute warm-up)	
	maximum (dB)	typical (dB)	maximum (dB)	typical (dB)
9 kHz to 644 MHz	±1.3	±0.5	±2.0	±0.5
> 644 MHz to 40 GHz	±1.8	±0.5	±3.0	±1.0
> 40 GHz to 70 GHz	±2.0	±0.5	±3.0	±1.0
> 70 GHz to 90 GHz	±2.2	±0.5	±3.0	±1.0
> 90 GHz to 110 GHz	±2.5	±0.5	±3.0	±1.0

**Displayed Average Noise Level (DANL)** (RMS detection, VBW/Avg type = Log, IF Gain On)

Frequency	maximum (dBm)	typical (dBm)
10 MHz to 644 MHz	-131	-134
> 644 MHz to 4 GHz	-136	-140
> 4 GHz to 40 GHz	-131	-134
> 40 GHz to 70 GHz	-128	-132
> 70 GHz to 90 GHz	-127	-130
> 90 GHz to 110 GHz	-124	-127

**Third-Order Intercept (TOI)** (typical, 0 dBm tones 1 MHz apart, 0 dBm reference level)

2 GHz	+35 dBm
18 GHz	+35 dBm
62 GHz	+25 dBm

**Second Harmonic Distortion** (at 1 GHz input)

0 dBm Input	-50 dBc maximum
-20 dBm Input	-60 dBc maximum

**Input Match** (typical)

Frequency	K Connector		V Connector		W Connector	
	VSWR	Return Loss	VSWR	Return Loss	VSWR	Return Loss
9 kHz to 12.4 GHz	1.29:1	18 dB	1.29:1	18 dB	1.29:1	18 dB
> 12.4 GHz to 26.5 GHz	1.67:1	12 dB	1.43:1	15 dB	1.67:1	12 dB
> 26.5 GHz to 40 GHz	1.67:1	12 dB	1.58:1	13 dB	1.67:1	12 dB
> 40 GHz to 50 GHz	1.67:1	12 dB	1.67:1	12 dB	1.67:1	12 dB
> 50 GHz to 70 GHz	-	-	2.10:1	9 dB	2.10:1	9 dB
> 70 GHz to 110 GHz	-	-	-	-	2.10:1	9 dB

## General Specifications

<b>Setup Parameters</b>		
System Status	Connected Port, Model, Serial Number, Software Version, Frequency, Options	
Preset	Preset Traces, Preset Markers, Preset Limit Lines, Preset Meas Setup, Preset All	
Save/Recall	Save As/Save (Measurement, Setup, PNG, CSV, Limit Line), Recall, Save on Event (Crossing Limit, Sweep Complete, Save at Interval)	
<b>Connectors</b>		
RF In	32 GHz and 44 GHz Instruments: K Connector (2.92 mm), male 50 Ω 50 GHz and 70 GHz Instruments: V Connector (1.85 mm), male 50 Ω 90 GHz and 110 GHz Instruments: W Connector (1.0 mm), male 50 Ω	
USB Interface	USB 3.0, Type C Connector	
External Reference In	MCX(f), 50 Ω, 10 MHz	
External Trigger In	MCX(f), 50 Ω, TTL Levels	
<b>Computer Requirement</b>		
Display Resolution	16:9 / 16:10 Aspect Ratio (>1280 x 720 / 1280 x 800)	
Operating System	Windows® 7, 8.1, 10; 64-bit	
Recommended Minimum Configuration	Quad Core i7 fourth generation or higher CPU, 16 GB RAM, 128 GB Data Storage, USB 3.0	
<b>Regulatory Compliance</b>		
	(not including Windows Tablet/Laptop/PC)	
European Union	EMC 2014/30/EU, EN 61326:2013, CISPR 11/EN 55011, IEC/EN 61000-4-2/3/4/5/6/8/11 Low Voltage Directive 2014/35/EU Safety EN 61010-1:2010 RoHS Directive 2011/65/EU applies to instruments with CE marking placed on the market after July 22, 2017	
Australia and New Zealand	RCM AS/NZS 4417:2012	
South Korea	KCC-REM-A21-0004	
<b>Environmental</b>		
	MIL-PRF-28800F Class 3 (not including Windows Tablet/Laptop/PC)	
Operating Temperature Range	0 °C to 50 °C	
Storage Temperature Range	-40 °C to 71 °C	
Maximum Relative Humidity	95 % RH at 30 °C, non-condensing	
Vibration, Sinusoidal	5 Hz to 55 Hz	
Vibration, Random	10 Hz to 500 Hz	
Half Sine Shock	30 g <sub>n</sub>	
Altitude	4600 meters, operating and non-operating	
Explosive Atmosphere	MIL-PRF-28800F Section 4.5.6.3 MIL-STD-810G, Method 511.5, Procedure 1	
<b>Warranty</b>		
Duration	Standard three-year warranty	
<b>Size and Weight</b> (not including Windows Tablet/Laptop/PC)		
Size	155 mm x 84 mm x 27 mm (6.1 in x 3.3 in x 1.1 in)	
Weight	255 g (9.0 oz)	

## Ordering Information

### Models and Options

Model Number	Description
MS2760A-0032	Ultraportable Spectrum Master, Frequency Range 9 kHz to 32 GHz
MS2760A-0044	Ultraportable Spectrum Master, Frequency Range 9 kHz to 44 GHz
MS2760A-0050	Ultraportable Spectrum Master, Frequency Range 9 kHz to 50 GHz
MS2760A-0070	Ultraportable Spectrum Master, Frequency Range 9 kHz to 70 GHz
MS2760A-0090	Ultraportable Spectrum Master, Frequency Range 9 kHz to 90 GHz
MS2760A-0110	Ultraportable Spectrum Master, Frequency Range 9 kHz to 110 GHz
Option Number	
MS2760A-0032-0098	
MS2760A-0044-0098	
MS2760A-0050-0098	Standard Calibration (ISO/IEC 17025 and ANSI/NCSL Z540-1)
MS2760A-0070-0098	
MS2760A-0090-0098	
MS2760A-0110-0098	
MS2760A-0032-0099	
MS2760A-0044-0099	
MS2760A-0050-0099	Premium Calibration (ISO/IEC 17025 and ANSI/NCSL Z540-1 plus test data)
MS2760A-0070-0099	
MS2760A-0090-0099	
MS2760A-0110-0099	

### Standard Accessories (Included with instrument)

Part Number	Description
2000-1859-R	USB 3.0 Type C to Type A Cable, 1 m
2000-1605-R	BNC(m) to MCX(m) Cable (qty 2)
	Certificate of Calibration and Conformance

### Manuals (available at [www.anritsu.com](http://www.anritsu.com))

Part Number	Description
10580-00427	User Guide



Optional Accessories

Coaxial Adapters



Part Number	Description
2000-1880-R	DC to 18 GHz, N(m) to V(f), 50 Ω
2000-1881-R	DC to 18 GHz, N(f) to V(f), 50 Ω
K222B	DC to 40 GHz, K(f) to K(f), 50 Ω
34VFK50	DC to 40 GHz, V(f) to K(m), 50 Ω
34VFKF50	DC to 40 GHz, V(f) to K(f), 50 Ω
34VV50	DC to 65 GHz, V(m) to V(m), 50 Ω
34VVF50	DC to 65 GHz, V(f) to V(m), 50 Ω
34VVF50	DC to 65 GHz, V(f) to V(f), 50 Ω
34WW50	Precision Adapter, DC to 65 GHz, W1(m) to V(m), 50 Ω
34WVF50	Precision Adapter, DC to 65 GHz, W1(m) to V(f), 50 Ω
34WVF50	Precision Adapter, DC to 65 GHz, W1(f) to V(m), 50 Ω
34WVF50	Precision Adapter, DC to 65 GHz, W1(f) to V(f), 50 Ω
33WW50	W1(m) to W1(m)
33WWF50	W1(m) to W1(f)
33WVF50	W1(f) to W1(f)

Precision Fixed Attenuators



Part Number	Description
41KB-3	DC to 26.5 GHz, 1W, 3 dB, K(m) to K(f)
41KB-6	DC to 26.5 GHz, 1W, 6 dB, K(m) to K(f)
41KB-10	DC to 26.5 GHz, 1W, 10 dB, K(m) to K(f)
41KB-20	DC to 26.5 GHz, 1W, 20 dB, K(m) to K(f)
41KC-3	DC to 40 GHz, 1W, 3 dB, K(m) to K(f)
41KC-6	DC to 40 GHz, 1W, 6 dB, K(m) to K(f)
41KC-10	DC to 40 GHz, 1W, 10 dB, K(m) to K(f)
41KC-20	DC to 40 GHz, 1W, 20 dB, K(m) to K(f)
41V-3	DC to 65 GHz, 1W, 3 dB, V(m) to V(f)
41V-6	DC to 65 GHz, 1W, 6 dB, V(m) to V(f)
41V-10	DC to 65 GHz, 1W, 10 dB, V(m) to V(f)
41V-20	DC to 65 GHz, 1W, 20 dB, V(m) to V(f)

Precision Waveguide Coaxial Adapters (right angle)



Part Number	Description
35WR42KF	18 GHz to 26.5 GHz, WR42 to K(f)
35WR28KF	26.5 GHz to 40 GHz, WR28 to K(f)
35WR22VF	33 GHz to 50 GHz, WR22 to V(f)
35WR19VF	40 GHz to 60 GHz, WR19 to V(f)
35WR15VF	50 GHz to 65 GHz, WR15 to V(f)
35WR10WF	75 GHz to 110 GHz, WR10 to W1(f)
SC7442	60 GHz to 90 GHz, WR12 to W1(f)

## Optional Accessories (continued)

## Waveguide to Coaxial End Launch Adapters (straight through)



Part Number	Description
2000-1889-R	17.6 GHz to 26.7 GHz, WR42 to K(f)
2000-1890-R	26.4 GHz to 40.1 GHz, WR28 to K(f)
1091-460-R	17.6 GHz to 26.7 GHz, WR42 to V(f)
1091-459-R	26.4 GHz to 40.1 GHz, WR28 to V(f)
1091-458-R	33.0 GHz to 50.1 GHz, WR22 to V(f)
1091-457-R	39.3 GHz to 59.7 GHz, WR19 to V(f)
1091-456-R	49.9 GHz to 67.0 GHz, WR15 to V(f)
1091-402-R	49.9 GHz to 75.8 GHz, WR15 to W1(f)
1091-401-R	60.5 GHz to 92.0 GHz, WR12 to W1(f)
1091-400-R	73.8 GHz to 110 GHz, WR10 to W1(f)

## Optional Accessories (continued)

## Directional Horn Antennas



Part Number	Description
2000-1867-R	17.6 GHz to 26.7 GHz, WR42, 25 dBi gain
2000-1868-R	26.4 GHz to 40.1 GHz, WR28, 25 dBi gain
2000-1869-R	33.0 GHz to 50.1 GHz, WR22, 25 dB gain
2000-1870-R	39.3 GHz to 59.7 GHz, WR19, 25 dBi gain
2000-1871-R	49.9 GHz to 75.8 GHz, WR15, 25 dBi gain
2000-1872-R	60.0 GHz to 90.0 GHz, WR12, 25 dBi gain
2000-1873-R	75.0 GHz to 110.0 GHz, WR10, 25 dBi gain

## Test Port Cables (Armored, Semi-rigid)



Part Number	Description
3670K50-1	DC to 40 GHz, K(f) to K(m), 30.5 cm (1 ft)
3670K50-2	DC to 40 GHz, K(f) to K(m), 61.0 cm (2 ft)
3670V50A-1	DC to 70 GHz, V(f) to V(m), 30.5 cm (1 ft)
3670V50A-2	DC to 70 GHz, V(f) to V(m), 61.0 cm (2 ft)
3671W1-50-1	DC to 110 GHz, Flexible, W1(f) to W1(m), 10 cm
3671W1-50-2	DC to 145 GHz, Flexible, W1(f) to W1(m), 13 cm
3671W1-50-3	DC to 145 GHz, Flexible, W1(f) to W1(m), 16 cm

## USB Cable Extender



Model Number	Description
2000-1888-R	USB 3.0 Powered Cable Extender, 10 m, (32 ft) (up to two can be used in series for a total length of 20 m)
2000-1917-R	4-port 100 m USB CAT 6A/7 Extender System
2000-1918-R	4-port 200 m USB Multimode Fiber Extender System

## Training at Anritsu

Anritsu has designed courses to help you stay up to date with technologies important to your job. For available training courses, visit: [www.anritsu.com/training](http://www.anritsu.com/training)



### • United States

#### Anritsu Company

1155 East Collins Blvd., Suite 100, Richardson,  
TX 75081, U.S.A.  
Toll Free: 1-800-267-4878  
Phone: +1-972-644-1777  
Fax: +1-972-671-1877

### • Canada

#### Anritsu Electronics Ltd.

700 Silver Seven Road, Suite 120, Kanata,  
Ontario K2V 1C3, Canada  
Phone: +1-613-591-2003  
Fax: +1-613-591-1006

### • Brazil

#### Anritsu Elettronica Ltda.

Praça Amadeu Amaral, 27 - 1 Andar  
01327-010 - Bela Vista - Sao Paulo - SP  
Brazil  
Phone: +55-11-3283-2511  
Fax: +55-11-3288-6940

### • Mexico

#### Anritsu Company, S.A. de C.V.

Av. Ejército Nacional No. 579 Piso 9, Col. Granada  
11520 México, D.F., México  
Phone: +52-55-1101-2370  
Fax: +52-55-5254-3147

### • United Kingdom

#### Anritsu EMEA Ltd.

200 Capability Green, Luton, Bedfordshire, LU1 3LU,  
U.K.  
Phone: +44-1582-433200  
Fax: +44-1582-731303

### • France

#### Anritsu S.A.

12 avenue du Québec, Bâtiment Iris 1- Silic 612,  
91140 VILLEBON SUR YVETTE, France  
Phone: +33-1-60-92-15-50  
Fax: +33-1-64-46-10-65

### • Germany

#### Anritsu GmbH

Nemetschek Haus, Konrad-Zuse-Platz 1  
81829 München, Germany  
Phone: +49-89-442308-0  
Fax: +49-89-442308-55

### • Italy

#### Anritsu S.r.l.

Via Elio Vittorini 129, 00144 Roma, Italy  
Phone: +39-6-509-9711  
Fax: +39-6-502-2425

### • Sweden

#### Anritsu AB

Kistagången 20B, 164 40 KISTA, Sweden  
Phone: +46-8-534-707-00  
Fax: +46-8-534-707-30

### • Finland

#### Anritsu AB

Teknobulevardi 3-5, FI-01530 VANTAA, Finland  
Phone: +358-20-741-8100  
Fax: +358-20-741-8111

### • Denmark

#### Anritsu A/S

Torveporten 2, 2500 Valby, Denmark  
Phone: +45-7211-2200  
Fax: +45-7211-2210

### • Russia

#### Anritsu EMEA Ltd.

Representation Office in Russia  
Tverskaya str. 16/2, bld. 1, 7th floor.  
Moscow, 125009, Russia  
Phone: +7-495-363-1694  
Fax: +7-495-935-8962

### • Spain

#### Anritsu EMEA Ltd.

Representation Office in Spain  
Edificio Cuzco IV, Po. de la Castellana, 141, Pta. 5  
28046, Madrid, Spain  
Phone: +34-915-726-761  
Fax: +34-915-726-621

### • United Arab Emirates

#### Anritsu EMEA Ltd.

Dubai Liaison Office  
902, Aurora Tower,  
P O Box: 500311 - Dubai Internet City  
Dubai, United Arab Emirates  
Phone: +971-4-3758479  
Fax: +971-4-4249036

### • India

#### Anritsu India Private Limited

6th Floor, Indiqube ETA, No.38/4, Adjacent to EMC2,  
Doddanekundi, Outer Ring Road, Bengaluru - 560048,  
India  
Phone: +91-80-4058-1300  
Fax: +91-80-4058-1301

### • Singapore

#### Anritsu Pte. Ltd.

11 Chang Charn Road, #04-01, Shriro House  
Singapore 159640  
Phone: +65-6282-2400  
Fax: +65-6282-2533

### • P.R. China (Shanghai)

#### Anritsu (China) Co., Ltd.

Room 2701-2705, Tower A,  
New Caohejing International Business Center  
No. 391 Gui Ping Road Shanghai, 200233, P.R. China  
Phone: +86-21-6237-0898  
Fax: +86-21-6237-0899

### • P.R. China (Hong Kong)

#### Anritsu Company Ltd.

Unit 1006-7, 10/F., Greenfield Tower, Concordia Plaza,  
No. 1 Science Museum Road, Tsim Sha Tsui East,  
Kowloon, Hong Kong, P.R. China  
Phone: +852-2301-4980  
Fax: +852-2301-3545

### • Japan

#### Anritsu Corporation

8-5, Tamura-cho, Atsugi-shi, Kanagawa, 243-0016  
Japan  
Phone: +81-46-296-6509  
Fax: +81-46-225-8352

### • Korea

#### Anritsu Corporation, Ltd.

5FL, 235 Pangyoeyeok-ro, Bundang-gu, Seongnam-si,  
Gyeonggi-do, 13494 Korea  
Phone: +82-31-696-7750  
Fax: +82-31-696-7751

### • Australia

#### Anritsu Pty. Ltd.

Unit 20, 21-35 Ricketts Road,  
Mount Waverley, Victoria 3149, Australia  
Phone: +61-3-9558-8177  
Fax: +61-3-9558-8255

### • Taiwan

#### Anritsu Company Inc.

7F, No. 316, Sec. 1, NeiHu Rd., Taipei 114, Taiwan  
Phone: +886-2-8751-1816  
Fax: +886-2-8751-1817

List Revision Date: 20180409