

SM4226 DATA SHEET

SMA Female to N Male Adapter

SMA female to type N male adapter part number SM4226 from Fairview Microwave is in-stock and ships same day. This Fairview SMA to type N adapter has a female to male gender configuration. SM4226 SMA female to type N male adapter operates to 18 GHz. The Fairview Microwave RF adapter provides good VSWR of 1.3:1 maximum. The SMA connector mates mechanically with commercially available 3.5mm and 2.92mm (K) connectors.

RF adapters can be used to enable connections between two connector types that would otherwise not mate. Certain RF adapter configurations can also be used to protect connectors on expensive equipment where the number of connect and disconnect cycles is high. An RF, microwave, or millimeter wave adapter is connected to the equipment and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Fairview Microwave also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications

Description	Min	Тур	Max	Units
Frequency Range	DC		18	GHz
VSWR			1.3:1	

Electrical Specification Notes: Values at 25°C, sea level.

Mechanical Specifications

Size

Length	1.246 in [31.65 mm]
Width	0.75 in [19.05 mm]
Weight	0.0685 lbs [31.07 g]

Description	Connector 1	Connector 2
Туре	SMA Female	N Male
Polarity	Standard	Standard
Mating Cycles	500	500
Hex Size		3/4 in.
Mating Torque		12 to 15 in-lbs
		[1.36 to 1.70 Nm]



Configuration:

- SMA Female Connector 1
- N Male Connector 2
- 50 Ohm
- Straight Body Geometry

Features:

- VSWR of 1.3:1 max up to 18 GHz
- Contact plating according to MIL-G-45204
- · Gold over Nickel Plated Contact

Applications:

- Enables Between Series Connections
- General Purpose Test

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013

Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689





Material Specifications

Description	Connector 1	Connector 2
Туре	SMA Female	N Male
Contact Material	Beryllium Copper	Beryllium Copper
Contact Plating	Gold over Nickel	Gold over Nickel
Contact Plating Spec.	MIL-G-45204	MIL-G-45204
Insulation Material	PTFE	PTFE
Outer Contact Material	Passivated Stainless St	eel
Outer Contact Plating Spec.	ASTM A380	
Body Material		Passivated Stainless Steel
Body Plating Spec.		ASTM A380
Coupling Nut Material		Passivated Stainless Steel
Coupling Nut Plating Spec.		ASTM A380

Environmental Specifications

Temperature


Operating Range Vibration Salt Spray -55 to +100 deg C MIL-STD 202, Method 204, Condition D (20 G's) MIL-STD 202, Method 101, Condition B, 5% salt solution

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Typical Performance Data

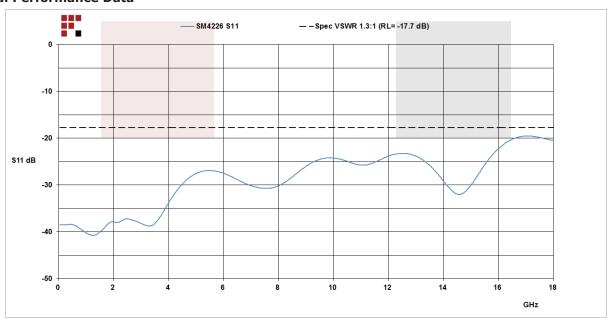





SMA Female to N Male Adapter from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF ondemand.


The information contained in this document is accurate to the best of our knowledge and representative of the part

For additional information on this product, please click the following link: SMA Female to N Male Adapter SM4226

URL: https://www.fairviewmicrowave.com/sma-female-n-male-adapter-sm4226-p.aspx

described he	erein. It may be	necessary to m	nake modifications	to the part and/	or the documentat	ion of the part, in	order
to implemen	it improvements.	Fairview Micro	wave reserves the	right to make su	uch changes as req	uired. Unless othe	rwise
stated, all sp	pecifications are	nominal. Fairv	iew Microwave doe	s not make any	representation or	warranty regarding	g the
				ose, and Fairview	w Microwave does	not assume any lia	bility
arising out o	of the use of any	part or docume	ntation.				



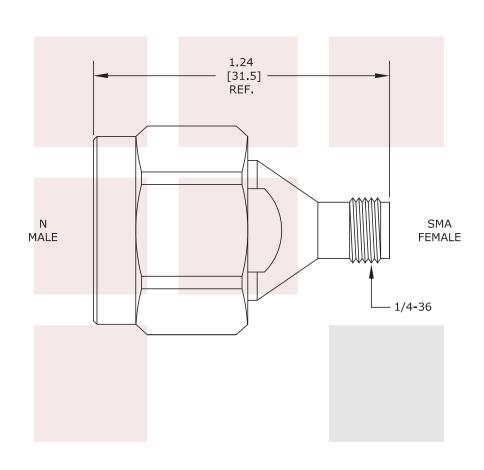

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].					
SMA Female to N Male Adapter	SM4226 CAGE CODE 3			FKR5		
	CAD FILE 102715	SHEET	SCAL	E N/A	SIZE A	150