




Adaptor plug/plug  
2.92mm plug (male) / 2.92mm plug (male)

ME0011

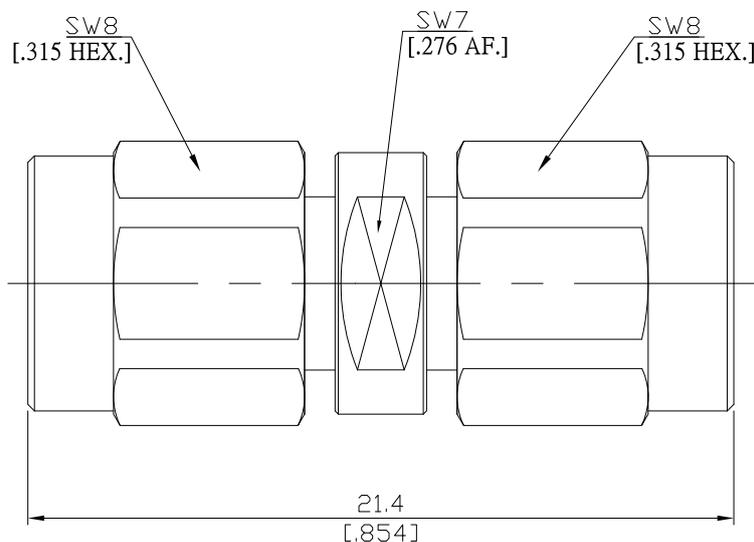

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

**Interface**

According to IEC 61169-35; IEEE Std 287-2007  
MIL-C-39012; MIL-STD-348A/323

**Electrical Data**

Impedance 50 Ω  
Frequency DC to 40 GHz  
VSWR (Return Loss) ≤ 1.15 (≥ 23 dB)  
Insertion Loss ≤ 0.05 x √F(GHz) dB

**Mechanical Data**

Coupling mechanisms Screw-lock  
Weight 0.0053 kg

**Environmental Data**

Temperature range -65°C to +165°C  
RoHS compliant

**Material And Plating**

| Piece Parts (2.92mm) | Material         | Plating                          |
|----------------------|------------------|----------------------------------|
| Centre contact       | Beryllium Copper | Gold plating(Nickel underplated) |
| Body                 | Stainless Steel  | Passivated                       |
| Insulator            | PPO/PPE          |                                  |
| Coupling nut         | Stainless Steel  | Passivated                       |

| Piece Parts (2.92mm) | Material         | Plating                          |
|----------------------|------------------|----------------------------------|
| Centre contact       | Beryllium Copper | Gold plating(Nickel underplated) |
| Body                 | Stainless Steel  | Passivated                       |
| Insulator            | PPO/PPE          |                                  |
| Coupling nut         | Stainless Steel  | Passivated                       |

**Packing**

Single or 100