

SM8796 DATA SHEET

Full Detent SMP Male to SMP Male Smooth Bore CM Adapter

Full detent SMP male to SMP male smooth bore CM adapter part number SM8796 from Fairview Microwave is in-stock and ships same day. This Fairview SMP to SMP adapter has a male to male gender configuration and is built of durable stainless steel. SM8796 SMP male to SMP male adapter operates to 40 GHz. The Fairview Microwave RF adapter provides good VSWR of 1.3:1 maximum.

RF adapters can be used to enable connections between two connector types that would otherwise not mate. Certain RF adapter configurations can also be used to protect connectors on expensive equipment where the number of connect and disconnect cycles is high. An RF, microwave, or millimeter wave adapter is connected to the equipment and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Fairview Microwave also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications

-						
Description	Min		Тур	Max	Units	
Frequency Range	DC			40	GHz	
VSWR				1.3:1		
Electrical Specification Values at 25°C, sea le						
echanical Specificat	tions					
Size						
Length Width				0.3 in [7.62 mm] 0.24 in [6.1 mm] 0.00088 lbs [0.4 g]		
Weight						
Description		Connect	tor 1	Connector 2	1	
Туре		SMP M	Male SMP Male			
Connection Method		Full Detent		Smooth Bore CM		
Polarity		Standard		Standard		
Interface Specification		MIL-STD-348		MIL-STD-348	3	
Interface Specification		MIL-SID	-348	iδ MIL-SID-348		

Material Specifications

Description	Connector 1	Connector 2		
Туре	SMP Male	SMP Male		
Contact Material	Beryllium Copper	Beryllium Copper		
Contact Plating	Gold	Gold		
Contact Plating Spec.	MIL-G-45204	MIL-G-45204		
Insulation Material	PTFE	PTFE		
Body Material	Passivated Stainless Steel	Passivated Stainless Steel		
Body Plating Spec.	AMS-QQ-P-35	AMS-QQ-P-35		



Configuration:

- Full Detent SMP Male Connector
- Smooth Bore CM SMP Male Connector 2
- 50 Ohm
- Straight Body Geometry

Features:

- VSWR of 1.3:1 max up to 40 GHz
- SMP interface meets MIL-STD-348
- Contact plating according to MIL-G-45204
- Gold Plated Beryllium Copper Contact

Applications:

General Purpose Test

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





Environmental Specifications

Temperature Operating Range

-65 to +165 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Full Detent SMP Male to SMP Male Smooth Bore CM Adapter from Fairview Microwave is in-stock and available to ship sameday. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: Full Detent SMP Male to SMP Male Smooth Bore CM Adapter SM8796


URL: https://www.fairviewmicrowave.com/full-detent-smp-male-smp-male-smooth-bore-cm-adapter-sm8796-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

1130 Junction Dr. #100 Allen, TX 75013 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689





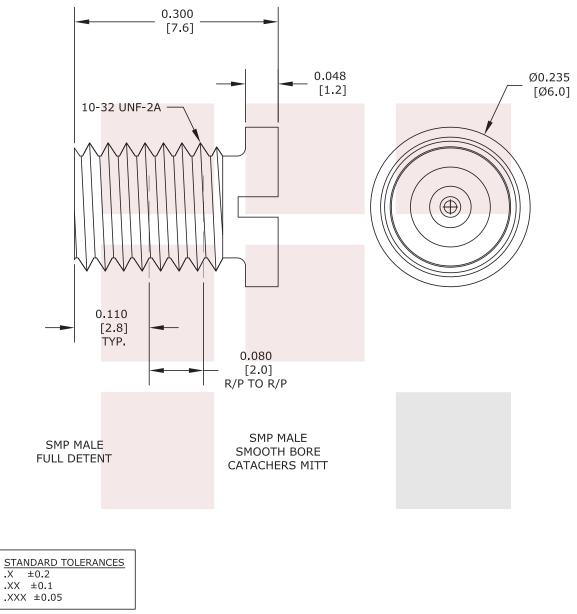

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

FAIRVIEW MICROWAVE INC.	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].					
Full Detent SMP Male to SMP Male Smooth Bore CM	DWG NO SM8796			CAGE CODE 3FKR5		
Adapter	CAD FILE 122116	SHEET	SCALE	E N/A	SIZE A	2233

1130 Junction Dr. #100 Allen, TX 75013 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689