

SM3187 DATA SHEET

2.92mm Male to 2.4mm Female Adapter

2.92mm male to 2.4mm female adapter part number SM3187 from Fairview Microwave is in-stock and ships same day. This Fairview 2.92mm to 2.4mm adapter has a male to female gender configuration. SM3187 2.92mm male to 2.4mm female adapter operates to 40 GHz. The 2.92mm connector mates mechanically with commercially available SMA and 3.5mm connectors. The 2.4mm connector mates mechanically with commercially available 1.85mm (V) connectors. The Fairview Microwave RF adapter provides excellent VSWR of 1.2:1 maximum.

RF adapters can be used to enable connections between two connector types that would otherwise not mate. Certain RF adapter configurations can also be used to protect connectors on expensive equipment where the number of connect and disconnect cycles is high. An RF, microwave, or millimeter wave adapter is connected to the equipment and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connnector savers. Fairview Microwave also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications

Description	Min	Тур	Мах	Units
Frequency Range	DC		40	GHz
VSWR			1.2:1	

Electrical Specification Notes: Values at 25°C, sea level.

Mechanical Specifications

Size Length Weight			.849 in [21.56 mm] .011 lbs [4.99 g]
Description	Connect	tor 1	Connector 2
Туре	2.92mm	Male	2.4mm Female
Polarity	Standa	ard	Standard
Interface Specification	MIL-STD-348		MIL-STD-348
Mating Cycles	500		500
Hex Size	5/16 inch		
Mating Torque	8 to 10 i	n-lbs	
	[0.90 to 1.	13 Nm]	



Configuration:

- 2.92mm Male Connector 1
- 2.4mm Female Connector 2
- 50 Ohms
- Straight Body Geometry

Features:

- VSWR of 1.2:1 max up to 40 GHz
- 2.92mm interface meets MIL-STD-348
- 2.4mm interface meets MIL-STD-348
- Contact plating according to MIL-G-45204
- Gold Plated Beryllium Copper Contact

Applications:

- Enables Between Series
 Connections
- General Purpose Test

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





Material Specifications

Description	Connector 1	Connector 1 Connector 2	
Туре	2.92mm Male	2.4mm Female	
Contact Material	Beryllium Copper	Beryllium Copper	
Contact Plating	Gold	Gold	
Contact Plating Spec.	MIL-G-45204	MIL-G-45204	
Insulation Material	PEI/PCTFE	PEI/PCTFE	
Outer Contact Material		Passivated Stainless Steel	
Outer Conductor Contact Spe	ec.	QQ-P-35	
Body Material	Passivated Stainless Stee	9l	
Body Plating Spec.	QQ-P-35		
Coupling Nut Material	Passivated Stainless Steel	1	
Coupling Nut Plating Spec.	QQ-P-35		

Environmental Specifications

Temperature Operating Range


-55 to +135 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Typical Performance Data

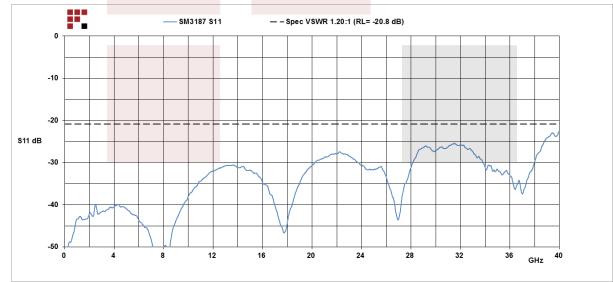





2.92mm Male to 2.4mm Female Adapter from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: 2.92mm Male to 2.4mm Female Adapter SM3187

The information contained in this document is accurate to the best of our knowledge and representative of the part


URL: https://www.fairviewmicrowave.com/2.92mm-male-2.4mm-female-adapter-sm3187-p.aspx

described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

1130 Junction Dr. #100 Allen, TX 75013 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689





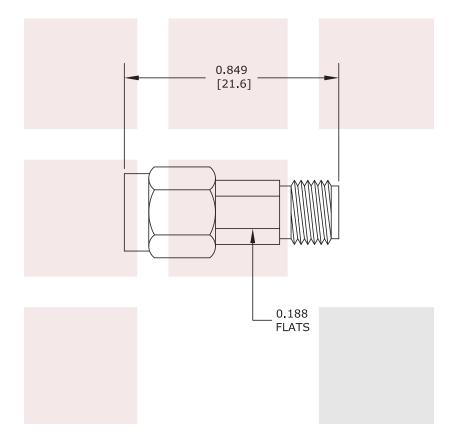

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].					
TITLE 2.92mm Male to 2.4mm Female Adapter	DWG NO SM3187			CAGE CODE 3FKR5		
	CAD FILE 111315	SHEET	SCAL	E N/A	SIZE A	150

1130 Junction Dr. #100 Allen, TX 75013 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689