

SM4655 DATA SHEET

N Female to SC Male Adapter

Type N female to SC male adapter part number SM4655 from Fairview Microwave is in-stock and ships same day. This Fairview type N to SC adapter has a female to male gender configuration. SM4655 type N female to SC male adapter operates to 4 GHz. The Fairview Microwave RF adapter provides excellent VSWR of 1.25:1 maximum.

RF adapters can be used to enable connections between two connector types that would otherwise not mate. Certain RF adapter configurations can also be used to protect connectors on expensive equipment where the number of connect and disconnect cycles is high. An RF, microwave, or millimeter wave adapter is connected to the equipment and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Fairview Microwave also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications

Description	Min	Тур	Max	Units
Frequency Range	DC		4	GHz
VSWR			1.25:1	

Electrical Specification Notes: Values at 25°C, sea level.

Mechanical Specifications

C	i	7	0
•		_	C

Length 1.53 in [38.86 mm]
Height 0.79 in [20.07 mm]
Weight 0.114 lbs [51.71 g]

Description	Connector 1	Connector 2	
Туре	N Female	SC Male	
Polarity	Standard	Standard	
Interface Specification	MIL-STD-348	MIL-STD-348	



Configuration:

- N Female Connector 1
- SC Male Connector 2
- 50 Ohm
- Straight Body Geometry

Features:

- VSWR of 1.25:1 max up to 4 GHz
- Type N interface meets MIL-STD-348
- SC interface meets MIL-STD-348
- Contact plating according to QQ-S-365
- · Silver Plated Contact

Applications:

- Enables Between Series Connections
- · General Purpose Test

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013 Tel: 1-800-715-4396 / (972) 649-6678

Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





Material Specifications

Description	Connecto	Connector 1		2
Туре	N Femal	e	SC Male	
Contact Material	Beryllium Co	pper	Beryllium Cop	oer
Contact Plating	Silver		Silver	
Contact Plating Spec.	QQ-S-36	5	QQ-S-365	
Insulation Material	PTFE		PTFE	
Outer Contact Material	Brass			
Outer Contact Plating	Nickel			
Outer Contact Plating Spec.	QQ-N-29	0		
Body Material			Brass	
Body Plating			Nickel	
Body Plating Spec.			QQ-N-290	
Coupling Nut Material			Brass	
Coupling Nut Plating			Nickel	
Coupling Nut Plating Spec.			QQ-N-290	

Environmental Specifications

Temperature

Operating Range


-65 to +165 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Typical Performance Data

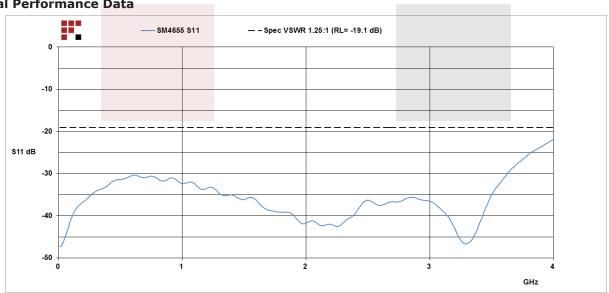





N Female to SC Male Adapter from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF ondemand.


For additional information on this product, please click the following link: N Female to SC Male Adapter SM4655

URL: https://www.fairviewmicrowave.com/n-female-sc-male-adapter-sm4655-p.aspx







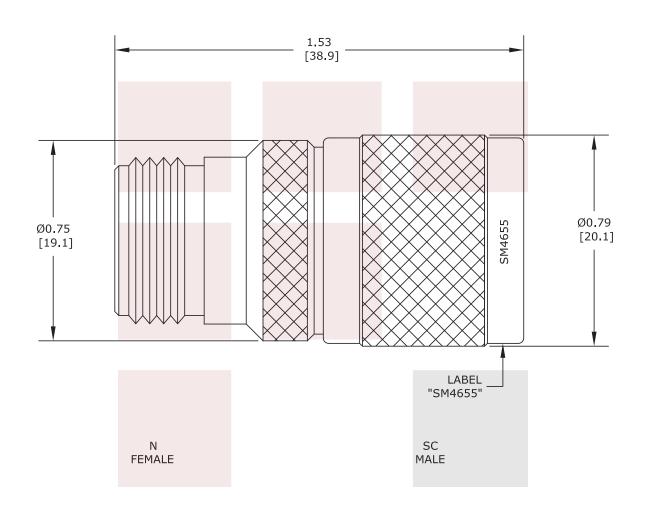

STANDARD TOLERANCES
.X ±0.2
.XX ±0.1
.XXX ±0.05

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].					
N Female to SC Male Adapter	DWG NO	SM4655		CAGE CODE 3FKR5		
	CAD FILE 093016	SHEET	SCAL	E N/A	SIZE A	41742