

ADAPTER 1.85/M-SMA/M 27 GHZ

SM3953


SPECIFICATIONS

ELECTRICAL
50 OHMS
VSWR 1.2:1 MAX @ 27 GHZ
FREQUENCY: 0-27 GHZ


MECHANICAL
500 CYCLES MIN

ENVIRONMENTAL
-65 DEG C TO +85 DEG C
CORROSION: MIL-STD 202
VIBRATION: MIL-STD 202

MATERIALS:
BODY: STAINLESS STEEL PER ASTM A484/A582,
PASSIVATED PER ASTM A380
CENTER CONTACT: BeCu PER ASTM-B-196, Au PLATED PER MIL-G-45204
OVER NICKEL PLATE
DIELECTRIC: PTFE

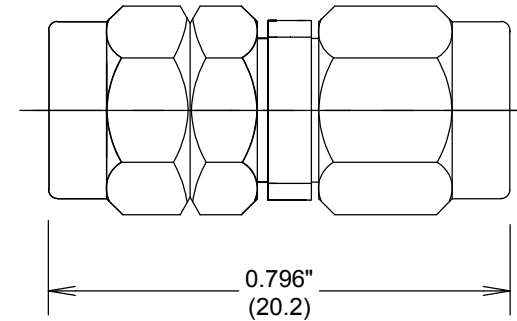

MEASUREMENTS BELOW ARE TYPICAL

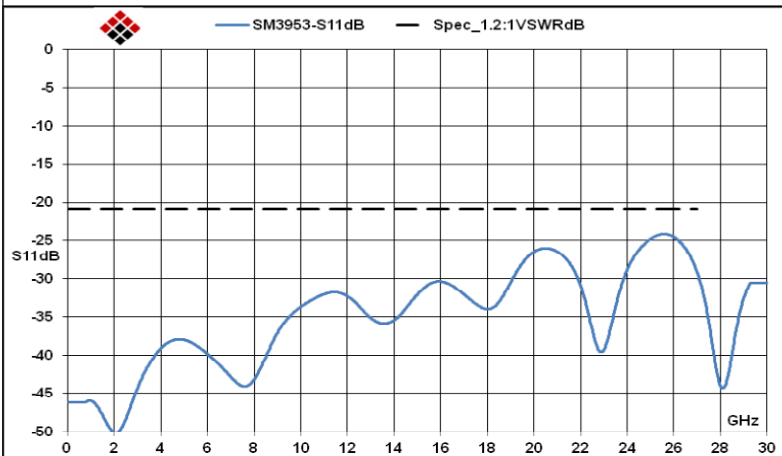

ALL DIMENSIONS IN inches(mm) Typical

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

ADAPTER 1.85/M-SMA/M 27 GHZ

SIZE	CAGE CODE	DWG NO	REV
A	3FKR5	SM3953	A

SCALE

SHEET