

2.4/M-2.92/M RIGHT ANGLE 40 GHZ ADAPTER

SM3193

SPECIFICATIONS

ELECTRICAL

50 OHMS
 VSWR 1.30:1 MAX @ 40 GHZ
 FREQUENCY: 0-40 GHZ

MECHANICAL

500 CYCLES MIN
 4.0 INCH-OUNCES MIN CONTACT TORQUE
 8-10 LBS COUPLING NUT MATING TORQUE

ENVIRONMENTAL



-65°C TO +85° C
 CORROSION: MIL-STD 202
 VIBRATION: MIL-STD 202

MATERIALS PASSIVATED STAINLESS STEEL

BODY: SST ASTM A484 / A582
 BeCu ATSM-B-196
 PASSIVATED ASTM A380
 CENTER CONTACT PLATING: Au PER MIL-G-45204

ROHS COMPLIANT

MEASUREMENTS BELOW ARE TYPICAL

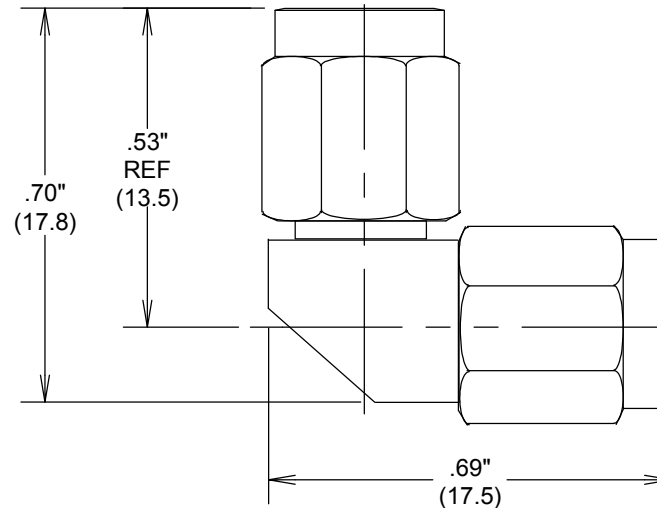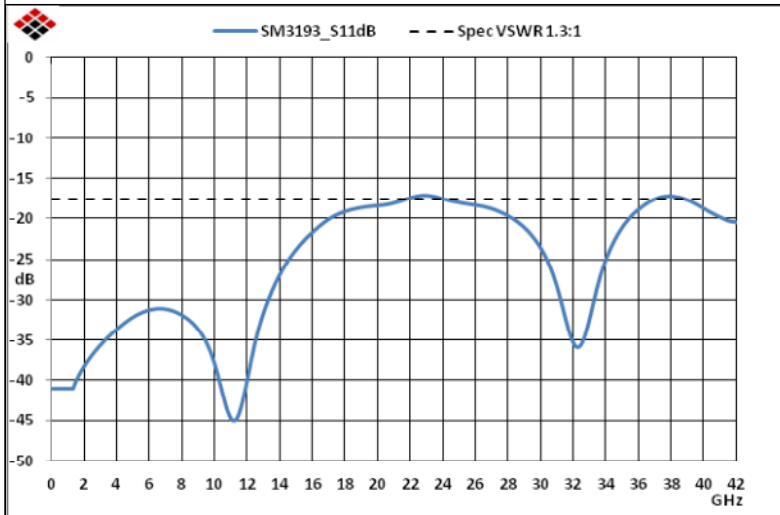

ALL DIMENSIONS IN inches(MM) Typical

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

**2.4/M-2.92/M RIGHT ANGLE
 40 GHZ ADAPTER**

SIZE

A

CAGE CODE

3FKR5

DWG NO

SM3193

REV

A

SCALE

SHEET