

# SM4231 DATA SHEET

## **SMA Male to N Male Adapter**

SMA male to type N male adapter part number SM4231 from Fairview Microwave is in-stock and ships same day. This Fairview SMA to type N adapter has a male to male gender configuration and is built of durable stainless steel. SM4231 SMA male to type N male adapter operates to 18 GHz. The Fairview Microwave RF adapter provides good VSWR of 1.3:1 maximum. The SMA connector mates mechanically with commercially available 3.5mm and 2.92mm (K) connectors.

RF adapters can be used to enable connections between two connector types that would otherwise not mate. Certain RF adapter configurations can also be used to protect connectors on expensive equipment where the number of connect and disconnect cycles is high. An RF, microwave, or millimeter wave adapter is connected to the equipment and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Fairview Microwave also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

### **Electrical Specifications**

Description	Min	Тур	Max	Units
Frequency Range	DC		18	GHz
VSWR			1.3:1	

Electrical Specification Notes: Values at 25°C, sea level.

#### **Mechanical Specifications**

#### Size

Length 1.28 in [32.51 mm]
Weight 0.071 lbs [32.21 g]

Description	Connector 1 Connector 2	
Туре	SMA Male	N Male
Polarity	Standard	Standard
Mating Cycles	500	500
Mating Torque	8 to 10 in-lbs	12 to 15 in-lbs
	[0.90 to 1.13 Nm]	[1.36 to 1.70 Nm]



# **Configuration:**

- SMA Male Connector 1
- N Male Connector 2
- 50 Ohm
- Straight Body Geometry

#### **Features:**

- VSWR of 1.3:1 max up to 18 GHz
- Contact plating according to MIL-G-45204
- Gold over Nickel Plated Contact

## **Applications:**

- Enables Between Series Connections
- General Purpose Test

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013

Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689

www.fairviewmicrowave.com sales@fairviewmicrowave.com





#### **Material Specifications**

Description	Connector 1	Connector 2			
Туре	SMA Male	N Male			
Contact Material	Beryllium Copper	Beryllium Copper			
Contact Plating	Gold over Nickel	Gold over Nickel			
Contact Plating Spec.	MIL-G-45204	MIL-G-45204			
Insulation Material	PTFE	PTFE			
Body Material	Passivated Stainless Stee	el Passivated Stainless Steel			
Body Plating Spec.	ASTM A380	ASTM A380			
Coupling Nut Material	Passivated Stainless Stee	Passivated Stainless Steel			
Coupling Nut Plating Spec.	ASTM A380	ASTM A380			

### **Environmental Specifications**

**Temperature** 

Operating Range Vibration Salt Spray -55 to +100 deg C


MIL-STD 202, Method 204, Condition D (20 G's)
MIL-STD 202, Method 101, Condition B, 5% salt solution

**Compliance Certifications** (see product page for current document)

#### **Plotted and Other Data**

Notes:

#### **Typical Performance Data**

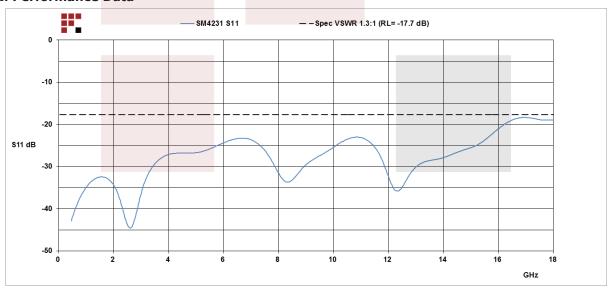





SMA Male to N Male Adapter from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF ondemand.


For additional information on this product, please click the following link: SMA Male to N Male Adapter SM4231

URL: https://www.fairviewmicrowave.com/sma-male-n-male-adapter-sm4231-p.aspx







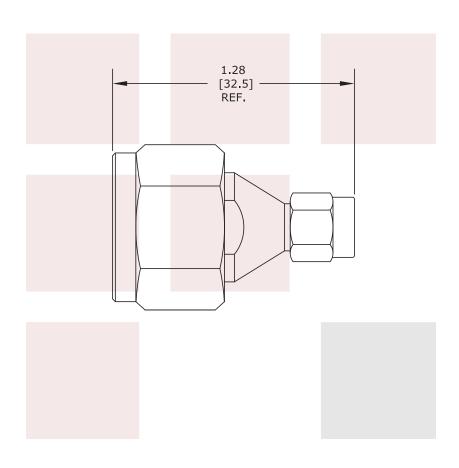

FAIRVIEW MICROWAVE INC.  ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES:  1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  3. DIMENSIONS ARE IN INCHES [mm].					
SMA Male to N Male Adapter	DWG NO SM4231			CAGE CODE 3FKR5		
	CAD FILE 111915	SHEET	SCALE	E N/A	SIZE A	150