

SM4649 DATA SHEET

7/16 DIN Male to SC Male Adapter

7/16 DIN male to SC male adapter part number SM4649 from Fairview Microwave is in-stock and ships same day. This Fairview 7/16 DIN to SC adapter has a male to male gender configuration. SM4649 7/16 DIN male to SC male adapter operates to 7.5 GHz. The Fairview Microwave RF adapter provides good VSWR of 1.3:1 maximum.

RF adapters can be used to enable connections between two connector types that would otherwise not mate. Certain RF adapter configurations can also be used to protect connectors on expensive equipment where the number of connect and disconnect cycles is high. An RF, microwave, or millimeter wave adapter is connected to the equipment and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Fairview Microwave also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications

| Description | Min | Тур | Max | Units |
|------------------------|-------|-----|-------|-------|
| Frequency Range | DC | | 7.5 | GHz |
| VSWR | | | 1.3:1 | |
| Operating Voltage (AC) | | | 1,000 | Vrms |
| DWV (AC) | | | 3,000 | Vrms |
| Insulation Resistance | 5,000 | | | MOhms |
| | | | | |

Electrical Specification Notes:

Values at 25°C, sea level.

Mechanical Specifications

| Size |
|--------|
| Length |
| Width |
| Weight |

1.91 in [48.51 mm] 1.25 in [31.75 mm] 0.2488 lbs [112.85 g]

| Description | Connector 1 | Connector 2 | | | |
|-------------------------|---------------------|-------------|--|--|--|
| Туре | 7/16 DIN Male | SC Male | | | |
| Polarity | Standard | Standard | | | |
| Interface Specification | MIL-C-39012 | MIL-STD-348 | | | |
| Mating Cycles | 500 | 500 | | | |
| Hex Size | 1 1/4 inch | | | | |
| Mating Torque | 221 to 265 in-lbs | | | | |
| | [24.97 to 29.95 Nm] | | | | |



Configuration:

- 7/16 DIN Male Connector 1
- SC Male Connector 2
- 50 Ohms
- Straight Body Geometry

Features:

- VSWR of 1.3:1 max up to 7.5 GHz
- 7/16 DIN interface meets MIL-C-39012
- SC interface meets MIL-STD-348
- Contact plating according to MIL-G-45204
- · Gold Plated Brass Contact

Applications:

- Enables Between Series Connections
- General Purpose Test

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013 Tel: 1-800-715-4396 / (972) 649-6678

Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





Material Specifications

| Description | Connector 1 | Connector 2 | | | |
|----------------------------|---------------|-------------|--|--|--|
| Туре | 7/16 DIN Male | SC Male | | | |
| Contact Material | Brass | Brass | | | |
| Contact Plating | Gold | Gold | | | |
| Contact Plating Spec. | MIL-G-45204 | MIL-G-45204 | | | |
| Insulation Material | PTFE | PTFE | | | |
| Body Material | Brass | Brass | | | |
| Body Plating | Nickel | Nickel | | | |
| Body Plating Spec. | QQ-N-290 | QQ-N-290 | | | |
| Coupling Nut Material | Brass | Brass | | | |
| Coupling Nut Plating | Nickel | Nickel | | | |
| Coupling Nut Plating Spec. | QQ-N-290 | QQ-N-290 | | | |

Environmental Specifications

Temperature

Operating Range


-65 to +165 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Typical Performance Data

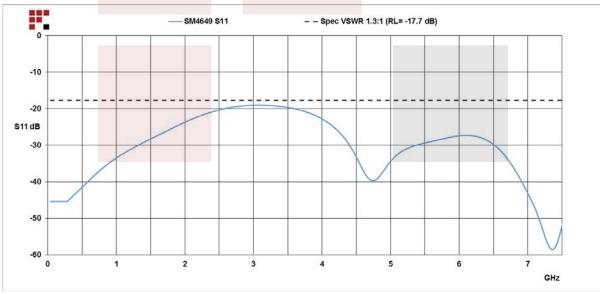





7/16 DIN Male to SC Male Adapter from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order


For additional information on this product, please click the following link: 7/16 DIN Male to SC Male Adapter SM4649

URL: https://www.fairviewmicrowave.com/7-16-male-sc-male-adapter-sm4649-p.aspx

| to implem | ent improvemer | nts. Fairview | Microwa | ave reserve | es the righ | nt to mak | e such | changes | as req | uired. Ur | less c | therwise |
|------------|--------------------|---------------|---------|-------------|-------------|-----------|--------|----------|--------|-----------|--------|-------------|
| | l specifications a | | | | | | | | | | | |
| | of the part des | | | | purpose, | and Fair | view M | icrowave | does i | not assur | ne an | y liability |
| arising ou | t of the use of a | ny part or do | ocument | ation. | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |





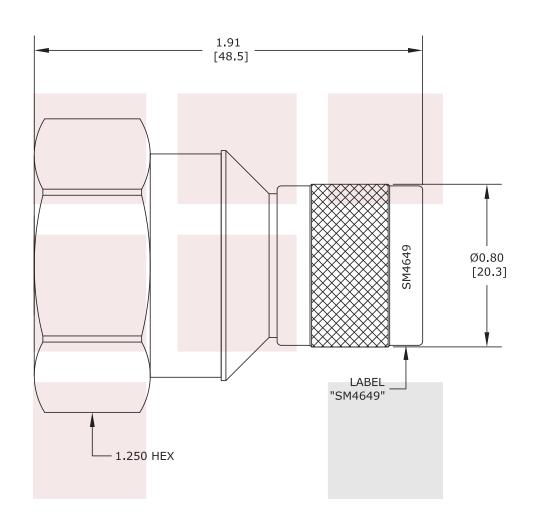

STANDARD TOLERANCES

.X ±0.2 .XX ±0.1 .XXX ±0.05

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

| FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM | NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm]. | | | | | | |
|--|---|-------|------|-------|--------|-------|--|
| 7/16 DIN Male to SC Male Adapter | DWG NO CAGE CODE SM4649 | | | | | BFKR5 | |
| | CAD FILE 093016 | SHEET | SCAL | E N/A | SIZE A | 41742 | |