

# SM3140 DATA SHEET

### **Precision 2.92mm Male to N Male Adapter**

Precision 2.92mm male to type N male adapter part number SM3140 from Fairview Microwave is in-stock and ships same day. This Fairview 2.92mm to type N adapter has a male to male gender configuration and is built of durable stainless steel in a precision design. SM3140 2.92mm male to type N male adapter operates to 18 GHz. The 2.92mm connector mates mechanically with commercially available SMA and 3.5mm connectors. The Fairview Microwave RF adapter provides excellent VSWR of 1.15:1 maximum.

RF adapters can be used to enable connections between two connector types that would otherwise not mate. Certain RF adapter configurations can also be used to protect connectors on expensive equipment where the number of connect and disconnect cycles is high. An RF, microwave, or millimeter wave adapter is connected to the equipment and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connnector savers. Fairview Microwave also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

### **Electrical Specifications**

Min	Тур	Max	Units			
DC		18	GHz			
		1.15:1				
			DC 18			

Electrical Specification Notes: Values at 25°C, sea level.

#### **Mechanical Specifications**

Size         Length         1.618 in [41.1 mm]           Weight         0.09612 lbs [43.6 g]           Description         Connector 1         Connector 2	Tyne	2 92mm Male	N Male
Length 1.618 in [41.1 mm]	Description	Connector 1	Connector 2
	Weight		0.09612 lbs [43.6 g]
	<b>Size</b> Length		1.618 in [41.1 mm]

Description	Connector 1	Connector 2
Туре	2.92mm Male	N Male
Polarity	Standard	Standard
Mating Cycles	500	500
Mating Torque	8 to 10 in-lbs	12 to 15 in-lbs
	[0.90 to 1.13 Nm]	[1.36 to 1.70 Nm]



## **Configuration:**

- 2.92mm Male Connector 1
- N Male Connector 2
- 50 Ohms
- Precision Design
- Straight Body Geometry

### **Features:**

- VSWR of 1.15:1 max up to 18 GHz
- Contact plating according to MIL-G-45204
- Gold over Nickel Plated Beryllium Copper Contact

### **Applications:**

- Enables Between Series Connections
- General Purpose Test
- · Precision Test & Measurement

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013

Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





### **Material Specifications**

Description	Connector 1	Connector 2				
Туре	2.92mm Male	N Male				
Contact Material	Beryllium Copper	Beryllium Copper				
Contact Plating	Gold over Nickel	Gold over Nickel				
Contact Plating Spec.	MIL-G-45204	MIL-G-45204				
Insulation Material	Oxide-Noryl	Oxide-Noryl				
Body Material	Passivated Stainless Stee	Passivated Stainless Steel				
Body Plating Spec.	ASTM A380	ASTM A380				
Coupling Nut Material	Passivated Stainless Steel	Passivated Stainless Steel				
Coupling Nut Plating Spec.	ASTM A380	ASTM A380				

### **Environmental Specifications**

**Temperature** 

Operating Range Vibration Salt Spray -55 to +100 deg C


MIL-STD 202, Method 204, Condition D (20 G's) MIL-STD 202, Method 101, Condition B, 5% salt solution

**Compliance Certifications** (see product page for current document)

#### **Plotted and Other Data**

Notes:

### **Typical Performance Data**

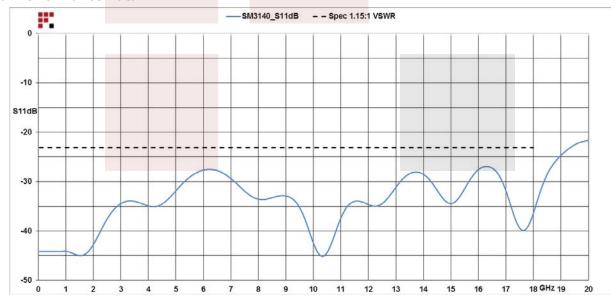





Precision 2.92mm Male to N Male Adapter from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: Precision 2.92mm Male to N Male Adapter SM3140


The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order

URL: https://www.fairviewmicrowave.com/2.92mm-male-n-male-adapter-sm3140-p.aspx

to implem	ient improvei	ments. Fairviev	v Microw	ave reserv	es the righ	it to mak	e such	changes	as requir	ed. Unles	s otl	herwise
		ns are nominal.										
suitability	of the part	described herei	n for any	particular	purpose,	and Fair	view Mi	crowave	does not	t assume	any	liability
arising ou	t of the use	of any part or d	ocument	ation.								





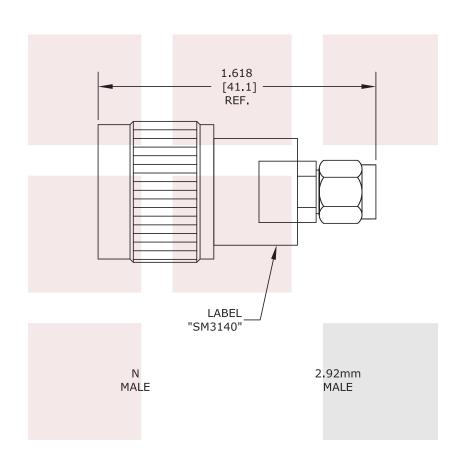

STANDARD TOLERANCES
.X ±0.2
.XX ±0.1
.XXX ±0.05

\*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

FAIRVIEW MICROWAVE INC.  ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES:  1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  3. DIMENSIONS ARE IN INCHES [mm].					
Precision 2.92mm Male to N Male Adapter	DWG NO	SM3140	CAGE CODE 3FKR5			
	CAD FILE 091216	SHEET	SCALE	≣ N/A	SIZE A	41742