

# SM4978 DATA SHEET

# **Precision QD SMA Male to SMA Female Adapter**

Precision QD SMA male to SMA female adapter part number SM4978 from Fairview Microwave is in-stock and ships same day. This Fairview SMA to SMA adapter has a male to female gender configuration in a precision design. SM4978 SMA male to SMA female adapter operates to 18 GHz. The Fairview Microwave RF adapter provides excellent VSWR of 1.15:1 maximum. The SMA connector mates mechanically with commercially available 3.5mm and 2.92mm (K) connectors.

RF adapters can be used to enable connections between two connector types that would otherwise not mate. Certain RF adapter configurations can also be used to protect connectors on expensive equipment where the number of connect and disconnect cycles is high. An RF, microwave, or millimeter wave adapter is connected to the equipment and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Fairview Microwave also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

### **Electrical Specifications**

Description	Min	Тур	Max	Units
Frequency Range	DC		18	GHz
VSWR			1.15:1	

Electrical Specification Notes: Values at 25°C, sea level.

#### **Mechanical Specifications**

Size
------

 Length
 0.72 in [18.29 mm]

 Weight
 0.013 lbs [5.9 g]

Description	Connector 1	Connector 2
Туре	SMA Male	SMA Female
Connection Method	QD	
Polarity	Standard	Standard
Interface Specification	MIL-STD-348	MIL-STD-348
Mating Cycles	500	500



# **Configuration:**

- QD SMA Male Connector 1
- SMA Female Connector 2
- 50 Ohm
- Precision Design
- Straight Body Geometry

#### **Features:**

- VSWR of 1.15:1 max up to 18 GHz
- SMA interface meets MIL-STD-348
- Contact plating according to MIL-G-45204

# **Applications:**

- General Purpose Test
- Precision Test & Measurement

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689

Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





#### **Material Specifications**

Description	Connector 1	Connector 2				
Туре	SMA Male	SMA Female				
Contact Material	Brass	Beryllium Copper				
Contact Plating	Gold	Gold				
Contact Plating Spec.	MIL-G-45204	MIL-G-45204				
Insulation Material	PTFE	PTFE				
Outer Contact Material		Stainless Steel				
Outer Contact Plating		Gold				
Outer Conductor Contact Spe	ec.	MIL-G-45204				
Body Material	Stainless Steel					
Body Plating	Gold					
Body Plating Spec.	MIL-G-45204					

### **Environmental Specifications**

#### **Temperature**

Operating Range


-45 to +110 deg C

**Compliance Certifications** (see product page for current document)

#### **Plotted and Other Data**

Notes:

### **Typical Performance Data**

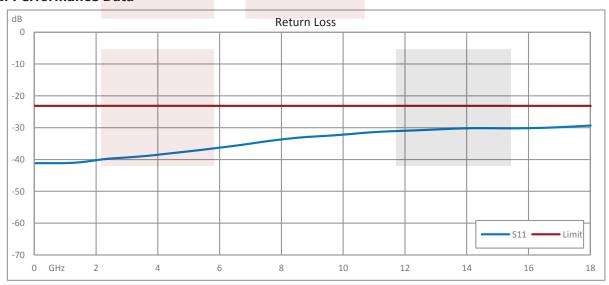





Precision QD SMA Male to SMA Female Adapter from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: Precision QD SMA Male to SMA Female Adapter SM4978


The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order

URL: https://www.fairviewmicrowave.com/sma-male-sma-female-adapter-sm4978-p.aspx

to implem	ent improven	nents. Fairview	Microw	ave reserv	es the righ	nt to mak	ke such	changes	as req	uired. Ur	less o	therwise
stated, al	l specification	s are nominal.	Fairvie	w Microwa	ve does n	ot make	any re	presentat	ion or	warranty	regar	ding the
suitability	of the part d	escribed hereir	for any	particular	purpose,	and Fair	rview M	licrowave	does	not assun	ne any	liability
arising ou	t of the use o	f any part or do	cument	ation.								





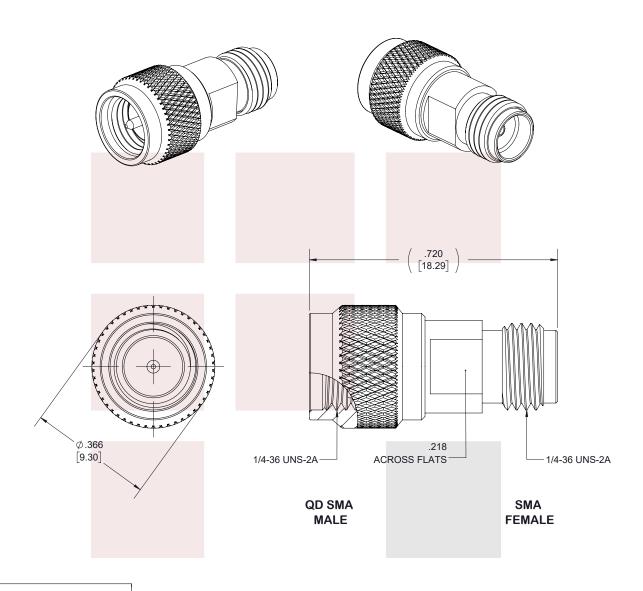

#### STANDARD TOLERANCES

.X ±0.2 .XX ±0.01 .XXX ±0.005

\*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES:  1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  3. DIMENSIONS ARE IN INCHES [mm].						
Precision QD SMA Male to SMA Female Adapter	DWG NO FM4978				CAGE CODE 3FKR5		
	CAD FILE 020218	SHEET 1 OF 1	SCAL	E N/A	SIZE A	7361	