

N JACK TO N/M QUICK RELEASE

SM4019

SPECIFICATIONS



ELECTRICAL

FREQUENCY: 0-18 GHZ
 IMPEDANCE: 50 OHMS
 VRMS: 1000 V SEA LEVEL

MECHANICAL

MATERIALS BODY: NICKEL PLATED BRASS
 MATERIALS CONTACT: BRASS
 PLATING: Au PER MIL-G-45204
 MATERIALS SLEEVE STAINLESS STEEL
 INSULATOR: TEFLON
 INTERFACE: MIL-STD-348

MEASUREMENTS BELOW ARE TYPICAL

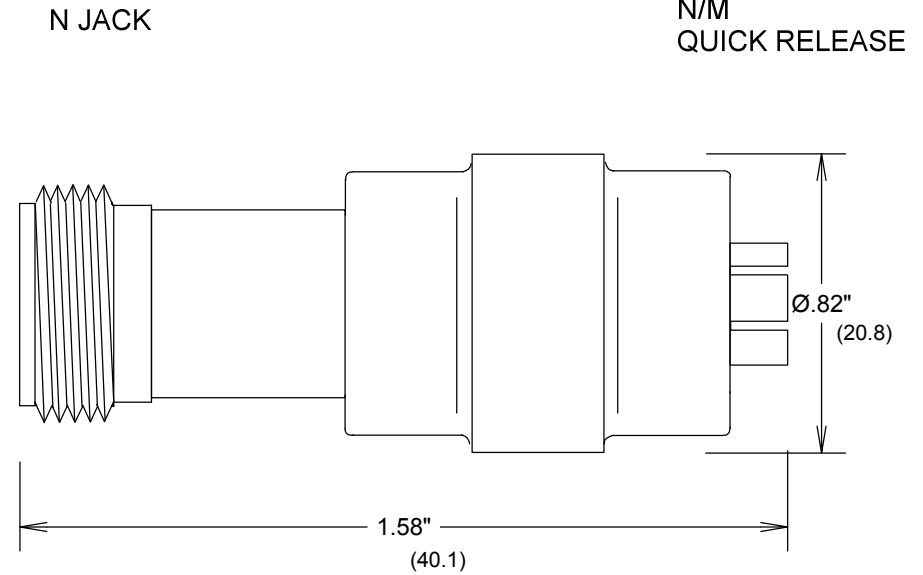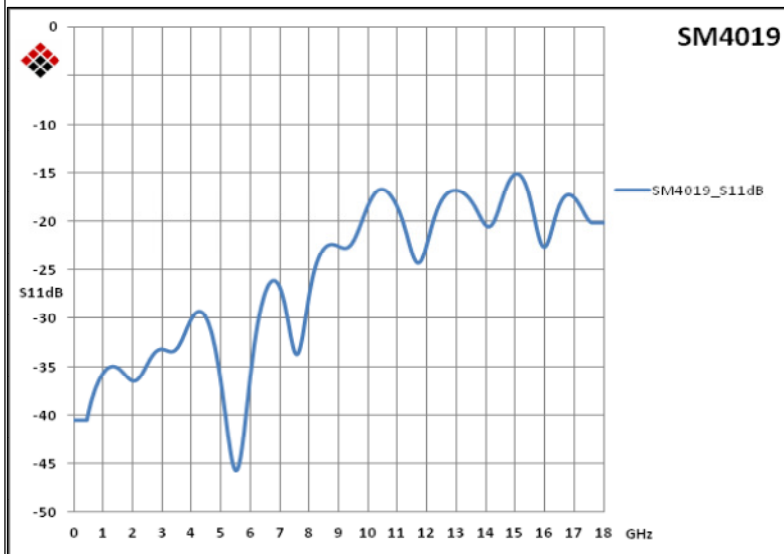

FAIRVIEW MICROWAVE INC.			
ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM			
TITLE			
N JACK TO N/M QUICK RELEASE			
SIZE	CAGE CODE	DWG NO	REV
A	3FKR5	SM4019	A
SCALE		SHEET	

ALL DIMENSIONS IN inches(MM) Typical