

SMB-SMA ADAPTER 4GHZ

SM2069

SPECIFICATIONS

ELECTRICAL

FREQUENCY: 0-4 GHZ

IMPEDANCE: 50 OHMS

VSWR: 1.2:1 MAX @ 4GHZ

MECHANICAL

MATERIAL BODY: NICKEL PLATED BRASS

MATERIAL CONTACTS: BeCu

CONTACT PLATING: Au PER MIL-G-45204


INSULATOR: TEFLON

INTERFACE: MIL-STD-348


ROHS COMPLIANT

OP TEMP -55°-125°C


SMA-M



SMB-P



MEASUREMENTS BELOW ARE TYPICAL

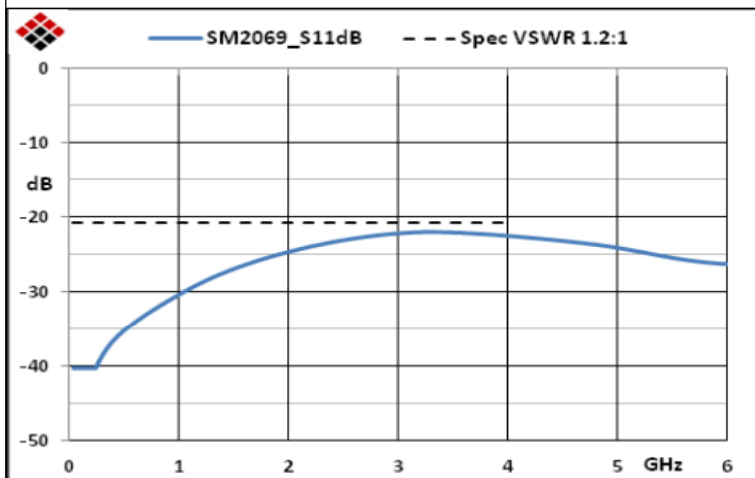

ALL DIMENSIONS IN inches(MM) Typical

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

SMB-SMA ADAPTER 4GHZ

SIZE A	CAGE CODE 3FKR5	DWG NO SM2069	REV --
SCALE		SHEET	