

SMA/F-N/F BULKHEAD ADAPTER

SM4211

SPECIFICATIONS

ELECTRICAL


FREQUENCY: 0-11 GHZ
 IMPEDANCE: 50 OHMS
 VSWR: 1.25:1 MAX @ 6 GHZ
 VSWR: 1.65:1 MAX @ 11 GHZ
 VRMS: 500 V SEA LEVEL

MECHANICAL


MATERIALS BODY: NICKEL PLATED BRASS
 MATERIALS CONTACTS: BeCu
 CONTACT PLATING: Au PER MIL-G-45204
 DURABILITY: 100 CYCLES MIN
 INTERFACE: MIL-STD-348

ENVIRONMENTAL

-95 TO +85 DEG C

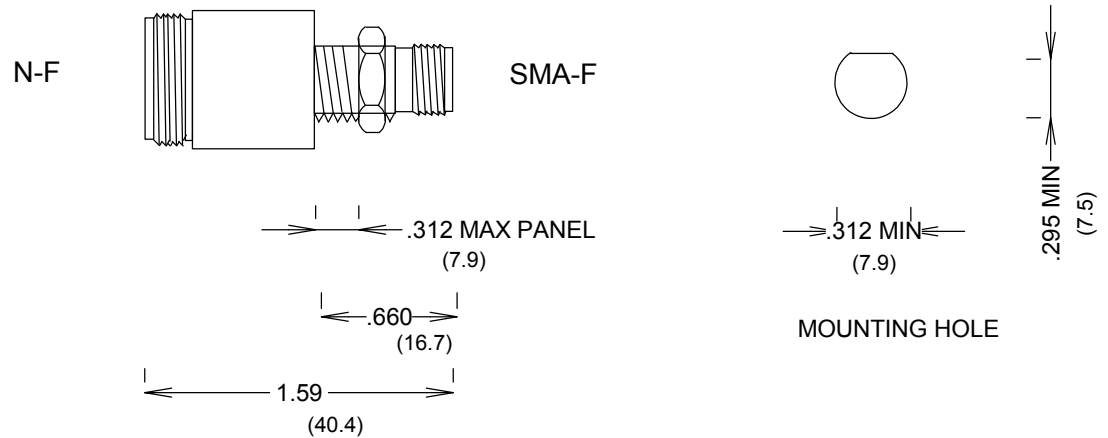

MEASUREMENTS BELOW ARE TYPICAL

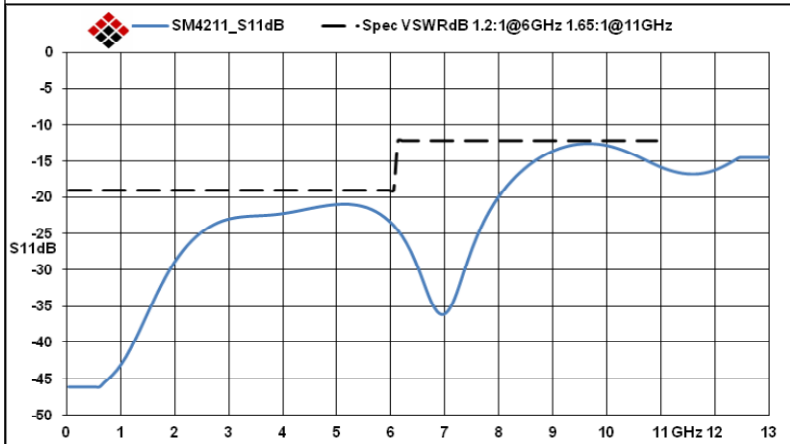

ALL DIMENSIONS IN inches(MM) Typical

FAIRVIEW MICROWAVE INC.			
ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM			
TITLE			
SMA/F-N/F BULKHEAD ADAPTER			
SIZE	CAGE CODE	DWG NO	REV
A	3FKR5	SM4211	B
SCALE	SHEET		