

# SM3130 DATA SHEET

# **Precision 2.92mm Male to N Female Adapter**

Precision 2.92mm male to type N female adapter part number SM3130 from Fairview Microwave is in-stock and ships same day. This Fairview 2.92mm to type N adapter has a male to female gender configuration in a precision design. SM3130 2.92mm male to type N female adapter operates to 18 GHz. The 2.92mm connector mates mechanically with commercially available SMA and 3.5mm connectors. The Fairview Microwave RF adapter provides excellent VSWR of 1.15:1 maximum.

RF adapters can be used to enable connections between two connector types that would otherwise not mate. Certain RF adapter configurations can also be used to protect connectors on expensive equipment where the number of connect and disconnect cycles is high. An RF, microwave, or millimeter wave adapter is connected to the equipment and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connnector savers. Fairview Microwave also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

### **Electrical Specifications**

Min	Тур	Max	Units
DC		18	GHz
		1.15:1	
			DC 18

Electrical Specification Notes: Values at 25°C, sea level.

#### **Mechanical Specifications**

Size Length Weight	1.579 in [40.11 mm] 0.0808 lbs [36.65 g]		
Description	Connecto	or 1 Connector 2	
Туре	2.92mm N	Male N Female	
Dolority	Standa	cd Standard	

Description	Connector 1	Connector 2	
Туре	2.92mm Male	N Female	
Polarity	Standard	Standard	
Mating Cycles	500	500	
Mating Torque	8 to 10 in-lbs		
	[0.90 to 1.13 Nm]		



# **Configuration:**

- 2.92mm Male Connector 1
- N Female Connector 2
- 50 Ohms
- Precision Design
- Straight Body Geometry

#### **Features:**

- VSWR of 1.15:1 max up to 18 GHz
- Contact plating according to MIL-G-45204
- Gold over Nickel Plated Beryllium Copper Contact

# **Applications:**

- Enables Between Series Connections
- General Purpose Test
- · Precision Test & Measurement

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013

Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689

www.fairviewmicrowave.com sales@fairviewmicrowave.com





### **Material Specifications**

Description	Connector 1	Connector 2		
Туре	2.92mm Male	N Female		
Contact Material	Beryllium Copper	Beryllium Copper		
Contact Plating	Gold over Nickel	Gold over Nickel		
Contact Plating Spec.	MIL-G-45204	MIL-G-45204		
Insulation Material	Oxide-Noryl	Oxide-Noryl		
Outer Contact Material		Passivated Stainless Steel		
Outer Conductor Contact Spec	C.	ASTM A380		
Body Material	Passivated Stainless Steel			
Body Plating Spec.	ASTM A380			
Coupling Nut Material	Passivated Stainless Steel			
Coupling Nut Plating Spec.	ASTM A380			

### **Environmental Specifications**

### **Temperature**


Operating Range Vibration Salt Spray -55 to +100 deg C MIL-STD 202, Method 204, Condition D (20 G's) MIL-STD 202, Method 101, Condition B, 5% salt solution

**Compliance Certifications** (see product page for current document)

#### **Plotted and Other Data**

Notes:

### **Typical Performance Data**

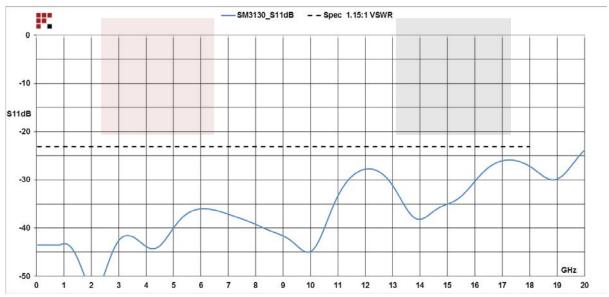





Precision 2.92mm Male to N Female Adapter from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.


For additional information on this product, please click the following link: Precision 2.92mm Male to N Female Adapter SM3130

URL: https://www.fairviewmicrowave.com/2.92mm-male-n-female-adapter-sm3130-p.aspx







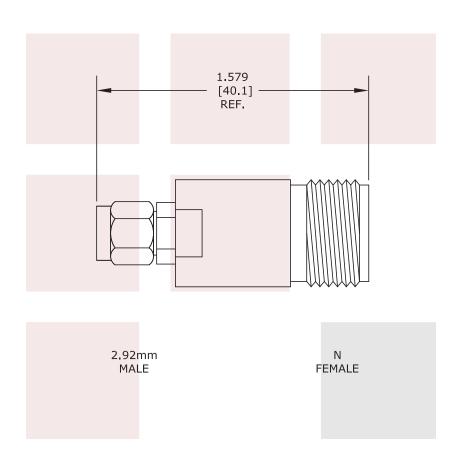

FAIRVIEW MICROWAVE INC.  ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES:  1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  3. DIMENSIONS ARE IN INCHES [mm].					
Precision 2.92mm Male to N Female Adapter	DWG NO	SM3130		CAGE CODE 3FKR5		
	CAD FILE 120115	SHEET	SCALE	N/A	SIZE A	150