

SM4533 DATA SHEET

RA N Male to N Female Adapter

RA type N male to type N female adapter part number SM4533 from Fairview Microwave is in-stock and ships same day. This Fairview type N to type N adapter has a male to female gender configuration. SM4533 type N male to type N female adapter operates to 6 GHz. The Fairview Microwave RF adapter provides excellent VSWR of 1.2:1 maximum. This right angle type N adapter allows for easier connections in tight spaces.

RF adapters can be used to enable connections between two connector types that would otherwise not mate. Certain RF adapter configurations can also be used to protect connectors on expensive equipment where the number of connect and disconnect cycles is high. An RF, microwave, or millimeter wave adapter is connected to the equipment and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Fairview Microwave also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications

Description	Min	Тур	Мах	Units
Frequency Range	DC		6	GHz
VSWR			1.2:1	

Electrical Specification Notes: Values at 25°C, sea level.

Mechanical Specifications

Size Length Height Weight		1.38 in [35.05 mm] 1.3 in [33.02 mm] 0.1275 lbs [57.83 g]
Description	Connector 1	Connector 2
Туре	N Male	N Female
Polarity	Standard	Standard
Interface Specification	MIL-STD-348	MIL-STD-348

Material Specifications

Description	Connector 1	Connector 2
Туре	N Male	N Female
Contact Plating	Gold	Gold
Contact Plating Spec.	MIL-G-45204	MIL-G-45204
Insulation Material	PTFE	PTFE
Outer Contact Material		Brass
Outer Contact Plating		Silver
Outer Conductor Contact Spec.		QQ-S-365
Body Material	Brass	
Body Plating	Silver	
Body Plating Spec.	QQ-S-365	



Configuration:

- N Male Connector 1
- N Female Connector 2
- •50 Ohm
- Right Angle Body Geometry

Features:

- VSWR of 1.2:1 max up to 6 GHz
- Type N interface meets MIL-STD-348
- Contact plating according to MIL-G-45204
- Gold Plated Contact

Applications:

General Purpose Test

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com






Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Typical Performance Data

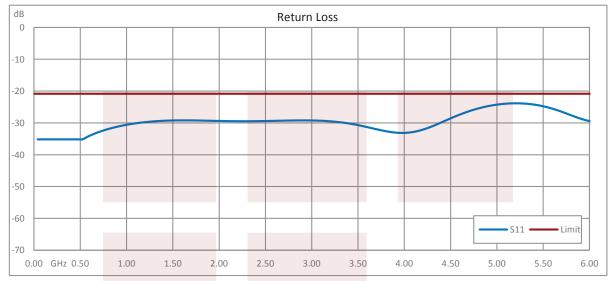

RA N Male to N Female Adapter from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: RA N Male to N Female Adapter SM4533


URL: https://www.fairviewmicrowave.com/ra-n-male-n-female-adapter-sm4533-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

1130 Junction Dr. #100 Allen, TX 75013 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689





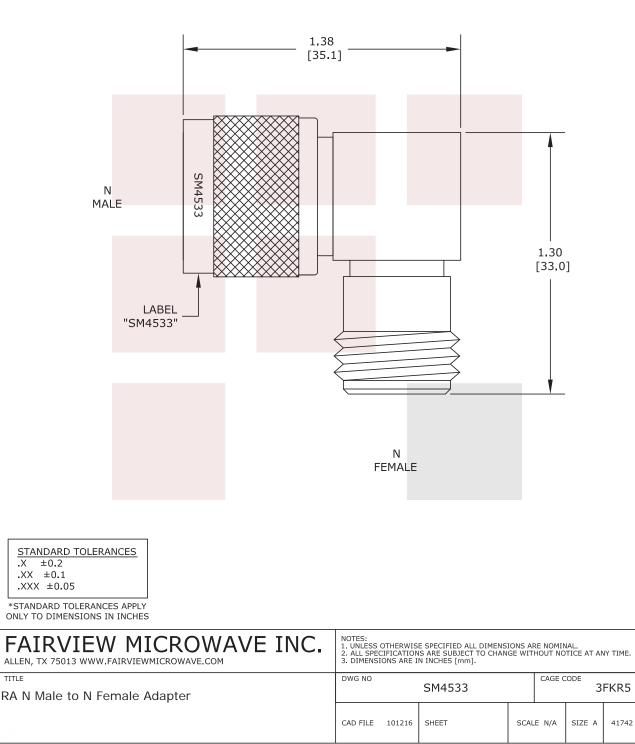

1130 Junction Dr. #100 Allen, TX 75013 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689