

SM5517 DATA SHEET

SMA Female to ZMA Plug Adapter

SMA female to ZMA plug adapter part number SM5517 from Fairview Microwave is in-stock and ships same day. This Fairview SMA to ZMA adapter has a female to plug gender configuration. SM5517 SMA female to ZMA plug adapter operates to 12.4 GHz. The SMA connector mates mechanically with commercially available 3.5mm and 2.92mm (K) connectors. The Fairview Microwave RF adapter provides good VSWR of 1.35:1 maximum.

RF adapters can be used to enable connections between two connector types that would otherwise not mate. Certain RF adapter configurations can also be used to protect connectors on expensive equipment where the number of connect and disconnect cycles is high. An RF, microwave, or millimeter wave adapter is connected to the equipment and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Fairview Microwave also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications

Description	Min	Тур	Max	Units
Frequency Range	DC		12.4	GHz
VSWR			1.35:1	
DWV (AC)			1,000	Vrms
Insulation Resistance	5,000			MOhms

Electrical Specification Notes:

Values at 25°C, sea level.

Mechanical Specifications

Size
Length
Weight

1.04 in [26.42 mm] 0.01984 lbs [9 g]

Description	Connector 1	Connector 2
Туре	SMA Female	ZMA Plug
Polarity	Standard	Standard
Mating Cycles	500	



Configuration:

- SMA Female Connector 1
- ZMA Plug Connector 2
- 50 Ohms
- Straight Body Geometry

Features:

- VSWR of 1.35:1 max up to 12.4 GHz
- Contact plating according to MIL-G-45204
- Gold over Nickel Plated Beryllium Copper Contact

Applications:

- Enables Between Series Connections
- General Purpose Test

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013 Tel: 1-800-715-4396 / (972) 649-6678

Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





Material Specifications


Description	Connector 1	Connector 2
Туре	SMA Female	ZMA Plug
Contact Material	Beryllium Copper	Beryllium Copper
Contact Plating	Gold over Nickel	Gold over Nickel
Contact Plating Spec.	MIL-G-45204	MIL-G-45204
Insulation Material	PTFE	PTFE
Outer Contact Material	Passivated Stainless St	eel
Outer Contact Plating Spec.	QQ-P-35C	
Body Material		Passivated Stainless Steel
Body Plating Spec.		QQ-P-35C
Coupling Nut Material		Passivated Stainless Steel
Coupling Nut Plating Spec.		QQ-P-35C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Typical Performance Data

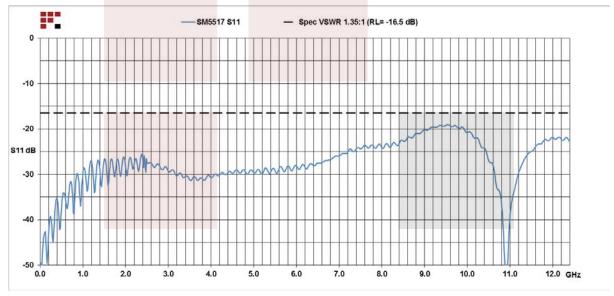





SMA Female to ZMA Plug Adapter from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF ondemand.

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order


For additional information on this product, please click the following link: SMA Female to ZMA Plug Adapter SM5517

URL: https://www.fairviewmicrowave.com/sma-female-zma-plug-adapter-sm5517-p.aspx

	ient improvemen										
	l specifications a										
suitability	of the part desc	ribed herein	for any	/ particular	purpose,	and Fair	view Mi	crowave	does not	assume a	ny liability
arising ou	t of the use of ar	ny part or do	cument	ation.							





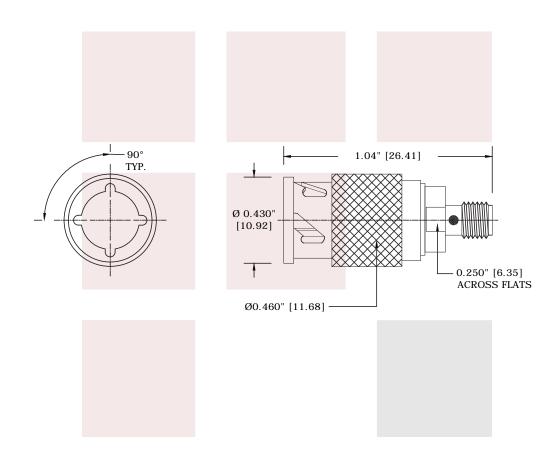

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].						
SMA Female to ZMA Plug Adapter	DWG NO SM5517				CAGE CODE 3FKR5		
	CAD FILE 011415	SHEET	SCAL	E N/A	SIZE A	5568	