

BNC/F-SMB/PLUG 4GHZ 75 OHMS

SM3651


SPECIFICATIONS

ELECTRICAL

FREQUENCY: 0-4 GHZ
 IMPEDENCE: 75 OHMS
 VSWR: 1.2:1 MAX

MECHANICAL

MATERIAL BODY: NICKEL PLATED BRASS
 CONTACTS: BeCu
 CONTACT PLATED: Au PER MIL-G-45204
 INSULATOR: TEFLON
 INTERFACE: MIL-STD-348A
 ROHS COMPLIANT
 TEMPERATURE RATING: -55° +110°C

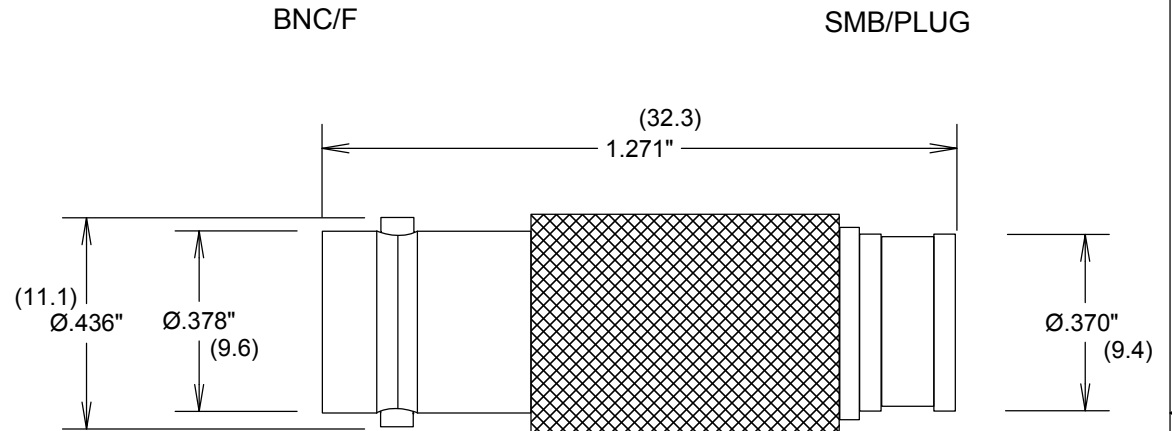

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

BNC/F-SMB/PLUG 4GHZ 75 OHMS

| | | | | |
|--------------------------------------|----------|-----------|---------------|----------|
| ALL DIMENSIONS IN inches(MM) Typical | SIZE | CAGE CODE | DWG NO | REV |
| | A | 3FKR5 | SM3651 | A |
| | SCALE | | SHEET | |