

HN - 7/16 ADAPTERS

SM4641

SPECIFICATIONS

ELECTRICAL

FREQUENCY: 0-4 GHZ
 IMPEDANCE: 50 OHMS
 VSWR: 1.2 @ 1 GHZ
 1.5 @ 4 GHZ



MECHANICAL

MATERIALS BODY: NICKEL PLATED BRASS
 MATERIALS CONTACTS BeCu(F), BRASS(M)
 CONTACT PLATING: Au PER MIL-G-45204
 INSULATOR: TEFLON
 RECOMMENDED TORQUE 7-16 221 IN-LBS
 DURABILITY: 500 CYCLES MIN
 INTERFACE: MIL-STD-348

OPERATING TEMP: -55° TO +120° C

ROHS COMPLIANT

MEASUREMENTS BELOW ARE TYPICAL

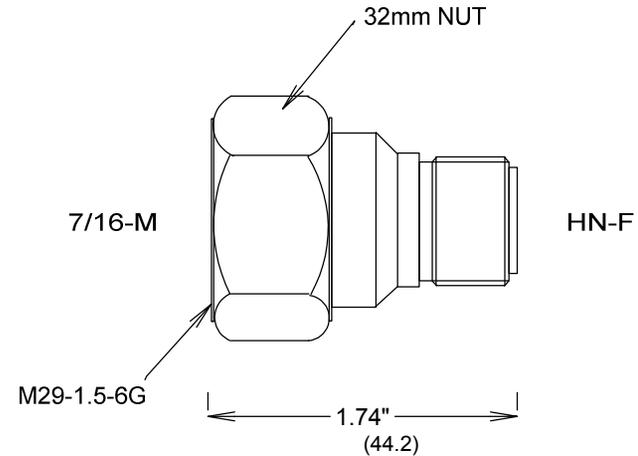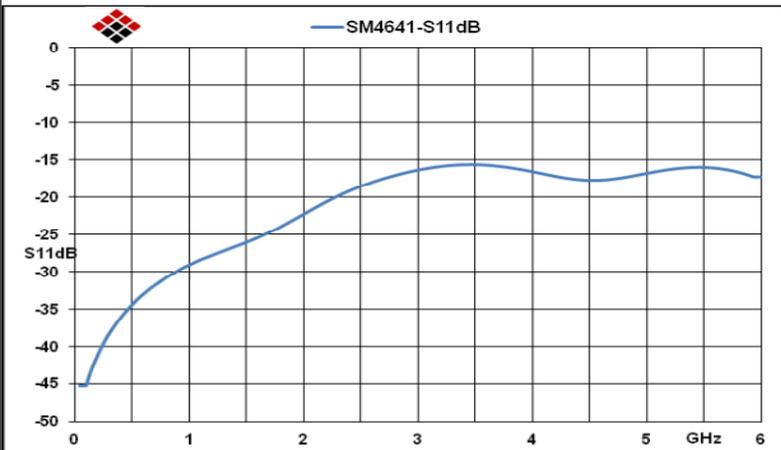

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

HN - 7/16 ADAPTERS

SIZE	CAGE CODE	DWG NO	REV
A	3FKR5	SM4641	C
SCALE		SHEET	

ALL DIMENSIONS IN inches(MM) Typical