



Bulkhead Slide-On BMA Plug to SMA Male Adapter

Bulkhead slide-on BMA plug to SMA male adapter part number FMAD1111 from Fairview Microwave is in-stock and ships same day. This Fairview BMA to SMA adapter has a plug to male gender configuration and is built of durable stainless steel. FMAD1111 BMA plug to SMA male adapter operates to 18 GHz. The Fairview Microwave RF adapter provides excellent VSWR of 1.15:1 maximum. Our RF BMA bulkhead to SMA adapter allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

RF adapters can be used to enable connections between two connector types that would otherwise not mate. Certain RF adapter configurations can also be used to protect connectors on expensive equipment where the number of connect and disconnect cycles is high. An RF, microwave, or millimeter wave adapter is connected to the equipment and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Fairview Microwave also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications

| Description | Min | Тур | Max | Units |
|------------------------|-------|-----|--------|-------|
| Frequency Range | DC | | 18 | GHz |
| VSWR | | | 1.15:1 | |
| Operating Voltage (AC) | | | 350 | Vrms |
| DWV (AC) | | | 1,000 | Vrms |
| Insulation Resistance | 5,000 | | | MOhms |

Mechanical Specifications

Size Length Width

Weight

0.895 in [22.73 mm] 0.433 in [11 mm] 0.017 lbs [7.71 q]

| Description | Connector 1 | Connector 2 | |
|------------------------------|--------------------|-------------|--|
| Туре | BMA Plug | SMA Male | |
| Connection Method | Slide-On | | |
| Polarity | Standard | Standard | |
| Contact Retention Force, Min | 6.07 lbs [2.75 Kg] | | |
| | | | |



Configuration:

- Slide-On BMA Plug Connector 1
- SMA Male Connector 2
- 50 Ohm
- Straight Body Geometry
- Bulkhead Mount Method

Features:

- VSWR of 1.15:1 max up to 18 GHz
- Gold Plated Brass Contact
- Low-Engagement Force

Applications:

- Enables Between Series Connections
- General Purpose Test
- Rack Mounted Equipment
- Blind Mating
- Rack and Panel
- Phased Array Systems
- Base Stations
- RF Backplanes
- Test I/O

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





Material Specifications

| Description | Connector 1 | Connector 2 | | |
|------------------------|----------------------------|----------------------------|--|--|
| Туре | BMA Plug | SMA Male | | |
| Contact Material | Brass | Brass | | |
| Contact Plating | Gold | Gold | | |
| Insulation Material | PTFE | PTFE | | |
| Outer Contact Material | Passivated Stainless Steel | | | |
| Body Material | Passivated Stainless Steel | Passivated Stainless Steel | | |
| Coupling Nut Material | | Passivated Stainless Steel | | |

Environmental Specifications

Temperature

Operating Range -65 to +125 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Bulkhead Slide-On BMA Plug to SMA Male Adapter from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: Bulkhead Slide-On BMA Plug to SMA Male Adapter FMAD1111

URL: https://www.fairviewmicrowave.com/bulkhead-slide-on-bma-plug-sma-male-adapter-fmad1111-p.aspx


The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

1130 Junction Dr. #100 Allen, TX 75013 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689

Copyright © 2017





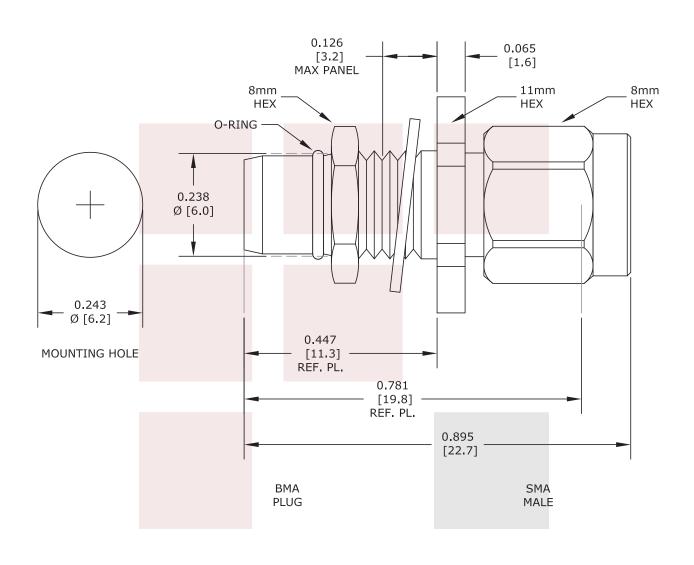

STANDARD TOLERANCES .X ±0.2

.X ±0.2 .XX ±0.1 .XXX ±0.05

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

| FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM | NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm]. | | | | | |
|---|--|-------|-------|-----------------|--------|------|
| Bulkhead Slide-On BMA Plug to SMA Male Adapter | DWG NO FMAD1111 | | | CAGE CODE 3FKR5 | | |
| | CAD FILE 022217 | SHEET | SCALE | ≣ N/A | SIZE A | 2233 |