

# SM3503 DATA SHEET

## 4 Hole Flange N Female to BNC Female Adapter

4 hole flange type N female to BNC female adapter part number SM3503 from Fairview Microwave is in-stock and ships same day. This Fairview type N to BNC adapter has a female to female gender configuration. SM3503 type N female to BNC female adapter operates to 6 GHz. The Fairview Microwave RF adapter provides excellent VSWR of 1.2:1 maximum. Our RF type N 4 hole flange to BNC adapter allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

RF adapters can be used to enable connections between two connector types that would otherwise not mate. Certain RF adapter configurations can also be used to protect connectors on expensive equipment where the number of connect and disconnect cycles is high. An RF, microwave, or millimeter wave adapter is connected to the equipment and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Fairview Microwave also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

## **Electrical Specifications**

| Description     | Min | Тур | Мах   | Units |
|-----------------|-----|-----|-------|-------|
| Frequency Range | DC  |     | 6     | GHz   |
| VSWR            |     |     | 1.2:1 |       |

Electrical Specification Notes: Values at 25°C, sea level.

#### **Mechanical Specifications**

| Size<br>Length<br>Width | 1.5 in [38.1 mm]<br>1 in [25.4 mm] |             |  |  |
|-------------------------|------------------------------------|-------------|--|--|
| Weight                  | 0.08025 lbs [36.4 g]               |             |  |  |
| Description             | Connector 1                        | Connector 2 |  |  |
| Туре                    | N Female                           | BNC Female  |  |  |
| Polarity                | Standard                           | Standard    |  |  |
| Interface Specification | MIL-STD-348                        | MIL-STD-348 |  |  |

#### **Material Specifications**

| Description                 | Connector 1      | Connector 2<br>BNC Female |  |  |
|-----------------------------|------------------|---------------------------|--|--|
| Туре                        | N Female         |                           |  |  |
| Contact Material            | Beryllium Copper | Beryllium Copper          |  |  |
| Contact Plating             | Silver           | Silver                    |  |  |
| Contact Plating Spec.       | QQ-S-365         | QQ-S-365                  |  |  |
| Outer Contact Material      | Brass            | Brass                     |  |  |
| Outer Contact Plating       | Nickel           | Nickel                    |  |  |
| Outer Contact Plating Spec. | QQ-N-290         | QQ-N-290                  |  |  |



## **Configuration:**

- N Female Connector 1
- BNC Female Connector 2
- 50 Ohm
- Straight Body Geometry
- 4 Hole Flange Mount Method

## **Features:**

- VSWR of 1.2:1 max up to 6 GHz
- Type N interface meets MIL-STD-348
- BNC interface meets MIL-STD-348
- Contact plating according to QQ-S-365
- Silver Plated Contact

## **Applications:**

- Enables Between Series Connections
- General Purpose Test
- Rack Mounted Equipment

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





### **Environmental Specifications**

Temperature Operating Range


-65 to +165 deg C

## Compliance Certifications (see product page for current document)

#### **Plotted and Other Data**

Notes:

#### **Typical Performance Data**

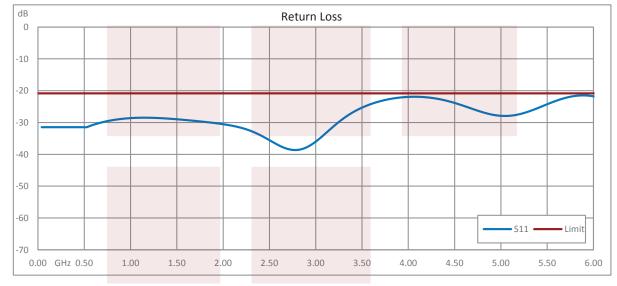

4 Hole Flange N Female to BNC Female Adapter from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: 4 Hole Flange N Female to BNC Female Adapter SM3503


URL: https://www.fairviewmicrowave.com/4-hole-flange-n-male-bnc-female-adapter-sm3503-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

1130 Junction Dr. #100 Allen, TX 75013 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689





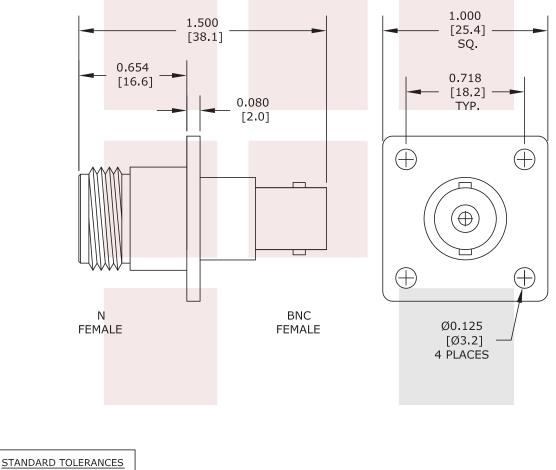

.X ±0.2 .XX ±0.1 .XXX ±0.05

\*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

| FAIRVIEW MICROWAVE INC.<br>ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM   | NOTES:<br>1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.<br>2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.<br>3. DIMENSIONS ARE IN INCHES [mm]. |       |       |                 |        |       |
|------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|-------|-----------------|--------|-------|
| $\overset{\text{TITLE}}{4}$ Hole Flange N Female to BNC Female Adapter | DWG NO<br>SM3503                                                                                                                                                                    |       |       | CAGE CODE 3FKR5 |        |       |
|                                                                        | CAD FILE 102016                                                                                                                                                                     | SHEET | SCALI | E N/A           | SIZE A | 41742 |

1130 Junction Dr. #100 Allen, TX 75013 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689