



SMA Female to 1.85mm Female Adapter

SMA female to 1.85mm female adapter part number SM3950 from Fairview Microwave is in-stock and ships same day. This Fairview SMA to 1.85mm adapter has a female to female gender configuration. SM3950 SMA female to 1.85mm female adapter operates to 27 GHz. The Fairview Microwave RF adapter provides excellent VSWR of 1.2:1 maximum. The SMA connector mates mechanically with commercially available 3.5mm and 2.92mm (K) connectors. The 1.85mm connector mates mechanically with commercially available 2.4mm connectors.

RF adapters can be used to enable connections between two connector types that would otherwise not mate. Certain RF adapter configurations can also be used to protect connectors on expensive equipment where the number of connect and disconnect cycles is high. An RF, microwave, or millimeter wave adapter is connected to the equipment and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Fairview Microwave also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications

Description	Min	Тур	Max	Units
Frequency Range	DC		27	GHz
VSWR			1.2:1	

Electrical Specification Notes: Values at 25°C, sea level.

Mechanical Specifications

Size Length	0.79 in [20.07 mm]
Weight	0.013 lbs [5.9 g]

Description	Connector 1	Connector 2	
Туре	SMA Female	1.85mm Female	
Polarity	Standard	Standard	
Mating Cycles	500	500	

Material Specifications

Description	Connector 1	Connector 2		
Туре	SMA Female	1.85mm Female		
Contact Material	Beryllium Copper	Beryllium Copper		
Contact Plating	Gold over Nickel	Gold over Nickel		
Contact Plating Spec.	MIL-G-45204	MIL-G-45204		
Insulation Material	PTFE	Oxide-Noryl		
Outer Contact Material	Passivated Stainless Steel	Passivated Stainless Steel		
Outer Contact Plating Spec.	ASTM A380	ASTM A380		



Configuration:

- SMA Female Connector 1
- 1.85mm Female Connector 2
- 50 Ohm
- Straight Body Geometry

Features:

- VSWR of 1.2:1 max up to 27 GHz
- Contact plating according to MIL-G-45204
- · Gold over Nickel Plated Contact

Applications:

- Enables Between Series Connections
- General Purpose Test

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013

Tel: 1-800-715-4396 / (972) 649-6678

Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





Environmental Specifications

Temperature


Operating Range Vibration Salt Spray -55 to +100 deg C MIL-STD-202, Method 204, Condition D (20 G's) MIL-STD-202, Method 101, Condition B, 5% salt solution

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Typical Performance Data

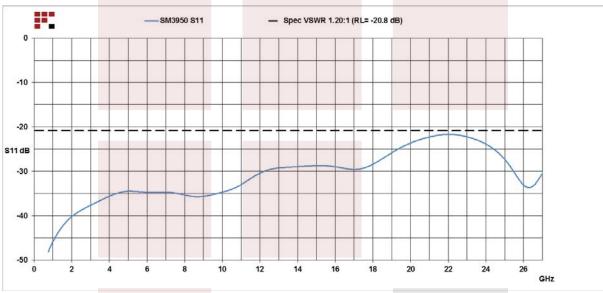

SMA Female to 1.85mm Female Adapter from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: SMA Female to 1.85mm Female Adapter SM3950

URL: https://www.fairviewmicrowave.com/sma-female-1.85mm-female-adapter-sm3950-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.


1130 Junction Dr. #100 Allen, TX 75013 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689

Copyright © 2016

REV 1.1 Page 2 of 3





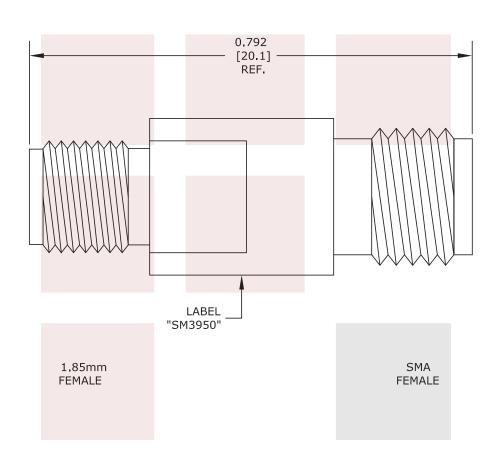

STANDARD TOLERANCES

.X ±0.2 .XX ±0.1 .XXX ±0.05

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].					
SMA Female to 1.85mm Female Adapter	DWG NO SM3950			CAGE CODE 3FKR5		
	CAD FILE 091416	SHEET	SCALI	E N/A	SIZE A	41742