

SM3188 DATA SHEET

RA 2.92mm Male to 2.4mm Female Adapter

RA 2.92mm male to 2.4mm female adapter part number SM3188 from Fairview Microwave is in-stock and ships same day. This Fairview 2.92mm to 2.4mm adapter has a male to female gender configuration. SM3188 2.92mm male to 2.4mm female adapter operates to 40 GHz. The 2.92mm connector mates mechanically with commercially available SMA and 3.5mm connectors. The 2.4mm connector mates mechanically with commercially available 1.85mm (V) connectors. This low profile right angle 2.92mm to 2.4mm adapter allows for easier connections in tight spaces. The Fairview Microwave RF adapter provides good VSWR of 1.4:1 maximum.

RF adapters can be used to enable connections between two connector types that would otherwise not mate. Certain RF adapter configurations can also be used to protect connectors on expensive equipment where the number of connect and disconnect cycles is high. An RF, microwave, or millimeter wave adapter is connected to the equipment and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Fairview Microwave also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications

Description	Min	Тур	Max	Units
Frequency Range	DC		40	GHz
VSWR			1.4:1	

Electrical Specification Notes:

Values at 25°C, sea level.

Mechanical Specifications

Size	
Length	
Width	
Weight	

0.47 in [11.94 mm] 0.517 in [13.13 mm] 0.01367 lbs [6.2 g]

Description	Connector 1 Connector 2	
Туре	2.92mm Male	2.4mm Female
Polarity	Standard	Standard
Mating Cycles	500	500
Mating Torque	8 to 10 in-lbs	
	[0.90 to 1.13 Nm]	



Configuration:

- 2.92mm Male Connector 1
- 2.4mm Female Connector 2
- 50 Ohms
- Right Angle Body Geometry

Features:

- VSWR of 1.4:1 max up to 40 GHz
- Contact plating according to MIL-G-45204
- Gold over Nickel Plated Beryllium Copper Contact

Applications:

- Enables Between Series Connections
- General Purpose Test

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013 Tel: 1-800-715-4396 / (972) 649-6678

Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





Material Specifications

Description	Connector 1	Connector 2			
Туре	2.92mm Male	2.4mm Female			
Contact Material	Beryllium Copper	Beryllium Copper			
Contact Plating	Gold over Nickel	Gold over Nickel			
Contact Plating Spec.	MIL-G-45204	MIL-G-45204			
Insulation Material	Oxide-Noryl	Oxide-Noryl			
Outer Contact Material		Passivated Stainless Steel			
Outer Conductor Contact Spe	C.	ASTM A380			
Body Material	Passivated Stainless Steel				
Body Plating Spec.	ASTM A380				
Coupling Nut Material	Passivated Stainless Steel				
Coupling Nut Plating Spec.	ASTM A380				

Environmental Specifications

Temperature


Operating Range Vibration Salt Spray -55 to +100 deg C MIL-STD 202, Method 204, Condition D (20 G's) MIL-STD 202, Method 101, Condition B, 5% salt solution

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Typical Performance Data

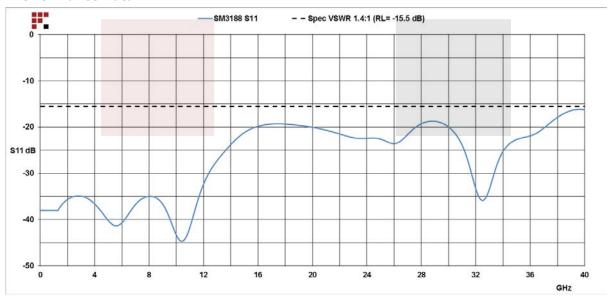





RA 2.92mm Male to 2.4mm Female Adapter from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.


For additional information on this product, please click the following link: RA 2.92mm Male to 2.4mm Female Adapter SM3188

URL: https://www.fairviewmicrowave.com/ra-2.92mm-male-2.4mm-female-adapter-sm3188-p.aspx







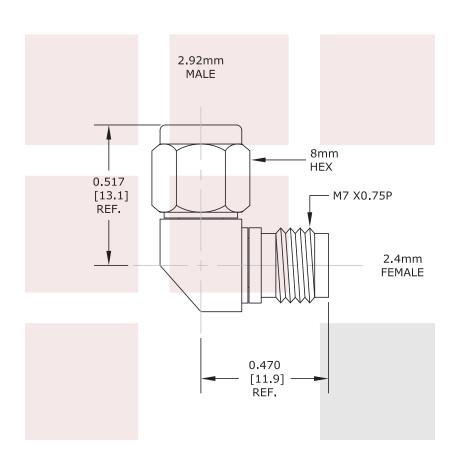

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].					
RA 2.92mm Male to 2.4mm Female Adapter	DWG NO SM3188		CAGE CODE 3FKR5			
	CAD FILE 120215	SHEET	SCALI	E N/A	SIZE A	150